

Ceiling mounted occupancy detectors - Slave devices

PD11-S-FLAT



white mat, similar to
RAL9010 , Part No. 92593

Product Information

- Super flat slave device for connection to a master device
- For extending the detection area of a Master device
- Trigger pulse to master device upon detected movement independent of the ambient light level
- Compatible with 230 V devices. Concerning exceptions please see the respective master device.
- Spring clips for quick and easy installation in suspended ceilings
- Includes blinds and clamp ring for installation into light fittings
- With accessories for flush-mounting in ceiling and exposed concrete
- **Application examples:**
small offices, underground car parks, entrance halls, corridors/hallways, staircases, open-plan offices, conference rooms

Technical Data

Voltage:	110 - 240 V AC 50 / 60 Hz
Dimensions:	Ø 52 x 60 mm
Power consumption:	approx. 0.2 W
Detection area:	horizontal 360° (Ceiling mounting)
Range:	max. Ø 9 m across max. Ø 6 m towards max. Ø 3 m seated
Monitored area	63 m ² / 2.5 m mounting height

(tangential movement):

Mounting height 2 m / 5 m / 2.5 m
min./max./recommended:

Degree / class of protection: IP20 / Class II

Ambient temperature: -25 °C to +50 °C

Housing: polycarbonate, UV-resistant




Pulse interval: 9 sec

Description

Description	Colour	Part number	EAN number
PD11-S-FLAT-FC	white mat, similar to RAL9010	92593	4007529925933

Accessory

Description	Colour	Part number	EAN number
In-wall mounting set / PD11	white	92833	4007529928330
Cover ring PD11	black glossy, similar to RAL9011	92537	4007529925377
Cover ring PD11	white mat, similar to RAL9010	92692	4007529926923
Square design frame PD11-FC	white mat, similar to RAL9010	92994	4007529929948

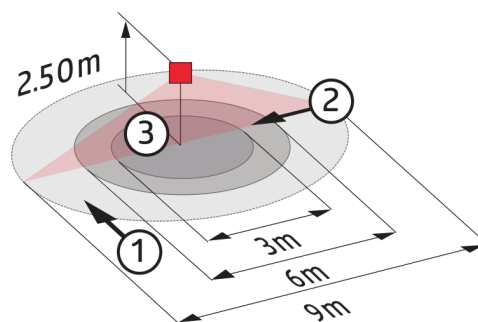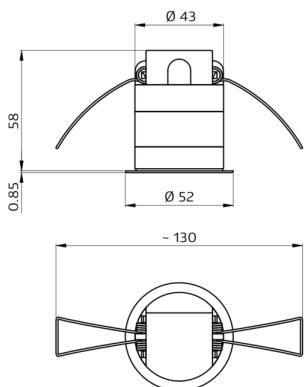


Dimensions 92593

Range diagram

1: Walking across

2: Walking towards

3: Seated activity

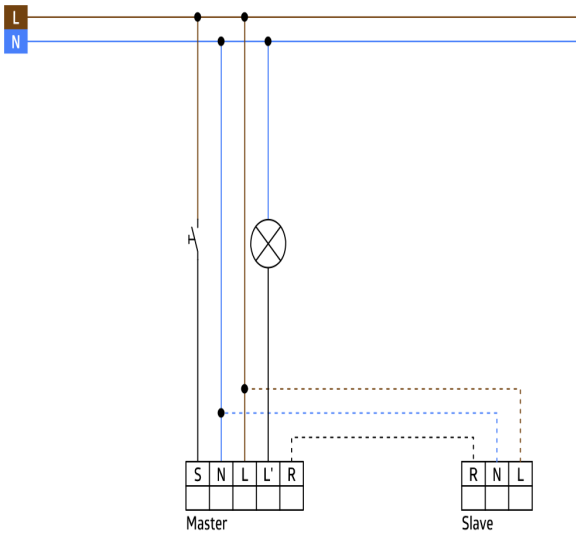

Wiring diagrams

© 2022 B.E.G. Brück Electronic GmbH