

DALI-SYS - Control devices

PBM-DALI-SYS-4W



white , Part No. 92842

Product Information

- Binary DALI input device for installation in in-wall sockets
- 4 inputs for conventional push buttons, freely configurable
- Seamless integration in B.E.G. LUXOMAT®net DALI-SYS
- Operating modes: Standard, staircase or scene mode
- Integrated LED to determine location of dismantled device
- Integrated buzzer to determine location of installed device
- DIP- and HEX-switch for quick commissioning with basic functionality
- Full range of functions can only be activated with other products of the product group B.E.G. LUXOMAT®net DALI-SYS

Technical Data


Voltage:	via DALI Bus, max. 22 V DC
Dimensions:	38 x 38 x 12 mm
Settings:	via DIP switch, HEX switch, B.E.G. BLE App, B.E.G. PC Tools, B.E.G. DALI Router
typ. power input:	7 mA
Degree / class of protection:	IP20 / Class II
Ambient temperature:	-25 °C to +50 °C
Housing:	polycarbonate, UV-resistant

Cable length: max. 50 cm


Follow-up time: 1 min - 150 min (staircase mode only)

Description

Description	Colour	Part number	EAN number
PBM-DALI-SYS-4W	white	92842	4007529928422

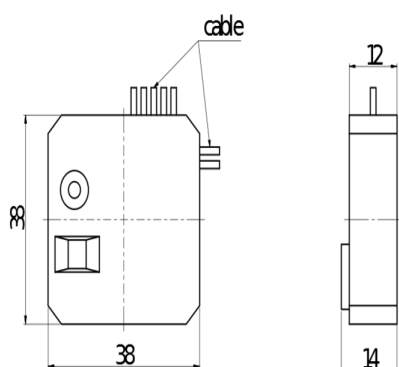

Dimensions 92842

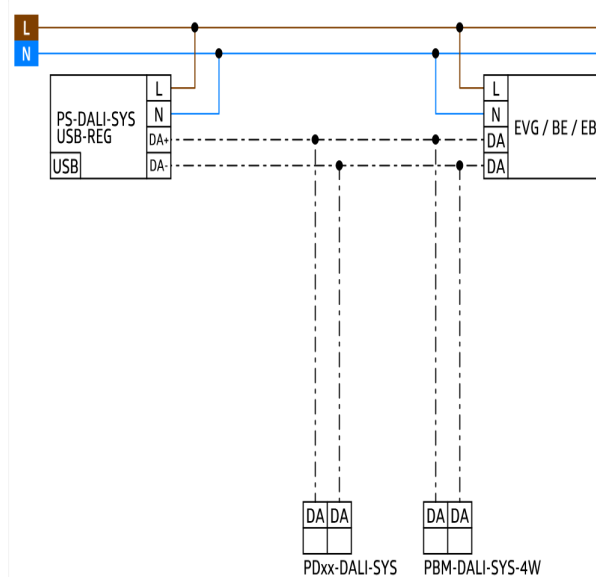

Wiring diagrams