



MASTER PL-C 2 Pin

MASTER PL-C 13W/840/2P 1CT/5X10BOX

Energy-saving compact fluorescent lampsCompact long-arc low-pressure mercury discharge lampEnvelope consists of 4 parallel narrow fluorescent tubes

Warnings and Safety

- Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position
- Dimming is not possible
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

| General Information | | Chromaticity coordinate Y (nom.) | 0.38 |
|----------------------------------|-----------------------|-------------------------------------|---------|
| Cap base | G24D-1 [G24d-1] | Correlated Colour Temperature (Nom) | 4000 k |
| Life to 10% failures (nom.) | 6500 h | Luminous efficacy (rated) (nom.) | 69 lm/W |
| Life to 50% failures (nom.) | 10000 h | Colour rendering index (nom.) | 80 |
| LSF 2000 h Rated | 99 % | LLMF 2000 h Rated | 92 % |
| LSF 4000 h Rated | 98 % | LLMF 4000 h Rated | 87 % |
| LSF 6000 h Rated | 92 % | LLMF 6000 h Rated | 83 % |
| LSF 8000 h Rated | 78 % | LLMF 8000 h Rated | 81 % |
| | Sphere | | |
| | | Operating and Electrical | |
| Light Technical | | Power (Rated) (Nom) | 13.8 W |
| Colour Code | 840 [CCT of 4,000 K] | Lamp current (nom.) | 0.170 A |
| Luminous flux (nom.) | 925 lm | | |
| Luminous flux (rated) (nom.) | 925 lm | Temperature | |
| Colour designation | Cool White (CW) | Design temperature (nom.) | 28 ℃ |
| Chromaticity coordinate X (nom.) | 0.38 | | |

G f

MASTER PL-C 2 Pin


| Controls and Dimming | |
|------------------------------------|--------|
| Dimmable | No |
| | |
| Mechanical and Housing | |
| Cap-base information | 2P |
| | |
| Approval and Application | |
| Energy Efficiency Class | G |
| Mercury (Hg) content (max.) | 1.4 mg |
| Mercury (Hg) content (nom.) | 1.4 mg |
| Energy consumption kWh/1,000 hours | 14 kWh |
| | 423280 |
| | |

| Product Data | | |
|-----------------------------------|------------------------------------|--|
| Full product code | 871150062086670 | |
| Order product name | MASTER PL-C 13W/840/2P 1CT/5X10BOX | |
| EAN/UPC – product | 8711500620866 | |
| Order code | 62086670 | |
| Local order code | 13PLC8402PIN | |
| SAP numerator - quantity per pack | 1 | |
| Numerator – packs per outer box | 50 | |
| SAP material | 927904884040 | |
| SAP net weight (piece) | 53.600 g | |
| ILCOS code | FSQ-13/40/1B-I-G24d=1 | |
| | | |

D (max) D1 (max) A (max) B (max) C (max)


27.1 mm 27.1 mm 97.5 mm 117.0 mm 139.4 mm

Dimensional drawing




| PI -C | 13W/840/2P |
|-------|-------------|
| | 1311/040/21 |

Photometric data

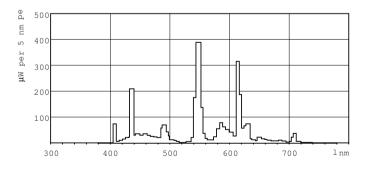

Lightcolour /840

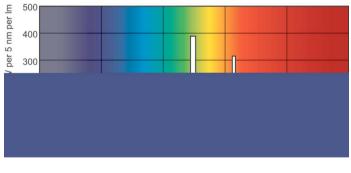

Lightcolour /840


Product

1CT/5X10BOX


MASTER PL-C 13W/840/2P

MASTER PL-C 2 Pin


Lifetime

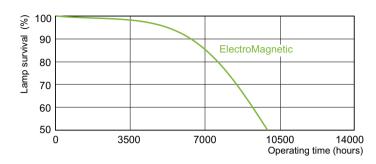



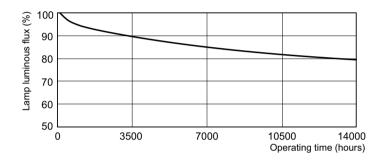

LDLM_PLC2P_0001-Lumen maintenance diagram



LDLE_PLC2P_0002-Life expectancy diagram



© 2021 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2021, September 2 - data subject to change