



MASTER PL-C 4 Pin



MASTER PL-C 13W/827/4P 1CT/5X10BOX

Energy-saving compact fluorescent lamps Compact long-arc low-pressure mercury discharge lamp Envelope consists of 4 parallel narrow fluorescent tubes

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear
- Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


| General Information | | Luminous efficacy (rated) (nom.) | |
|-------------------------------------|-----------------------|----------------------------------|---------|
| Cap base | G24Q-1 [G24q-1] | Colour rendering index (nom.) | 82 |
| Life to 50% failures preheat (nom.) | 13000 h | LLMF 2000 h Rated | 92 % |
| LSF preheat 2,000 hours rated | 99 % | LLMF 4000 h Rated | 87 % |
| LSF preheat 4,000 hours rated | 98 % | LLMF 6000 h Rated | 83 % |
| LSF preheat 6,000 hours rated | 97 % | LLMF 8000 h Rated | 81 % |
| LSF preheat 8,000 hours rated | 90 % | Operating and Electrical | |
| | Sphere | Power (Rated) (Nom) | 13.8 W |
| Light Technical | | Lamp current (nom.) | 0.170 A |
| Colour Code | 827 [CCT of 2,700 K] | Temperature | |
| Luminous flux (nom.) | 925 lm | Design temperature (nom.) | 28 °C |
| Luminous flux (rated) (nom.) | 925 lm | Controls and Dimming | |
| Colour designation | Incandescent White | Dimmable | Yes |
| Chromaticity coordinate X (nom.) | 0.463 | | |
| Chromaticity coordinate Y (nom.) | 0.42 | | |
| Correlated Colour Temperature (Nom) | 2700 K | | |

MASTER PL-C 4 Pin

| | |
|------------------------------------|-----------------|
| Mechanical and Housing | |
| Cap-base information | 4P |
| Approval and Application | |
| Energy Efficiency Class | G |
| Mercury (Hg) content (max.) | 1.4 mg |
| Mercury (Hg) content (nom.) | 1.4 mg |
| Energy consumption kWh/1,000 hours | 14 kWh |
| | 423298 |
| Product Data | |
| Full product code | 871150062326370 |

| | |
|-----------------------------------|------------------------------------|
| Order product name | MASTER PL-C 13W/827/4P 1CT/5X10BOX |
| EAN/UPC – product | 8711500623263 |
| Order code | 62326370 |
| Local order code | 13PLC8274PIN |
| SAP numerator – quantity per pack | 1 |
| Numerator – packs per outer box | 50 |
| SAP material | 927907182740 |
| SAP net weight (piece) | 49.900 g |
| ILCOS code | FSQ-13/27/1B-E-G24q=1 |


Dimensional drawing




PL-C 13W/827/4P

| Product | D (max) | D1 (max) | A (max) | B (max) | C (max) |
|---------------------------------------|---------|----------|---------|----------|----------|
| MASTER PL-C 13W/827/4P 1CT/5X10BOX | 27.1 mm | 27.1 mm | 97.5 mm | 117.0 mm | 131.9 mm |

Photometric data

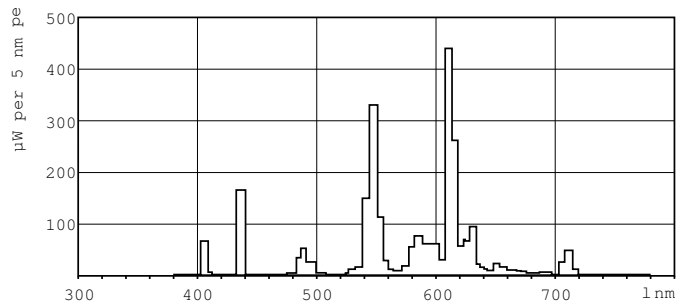


Lightcolour /827

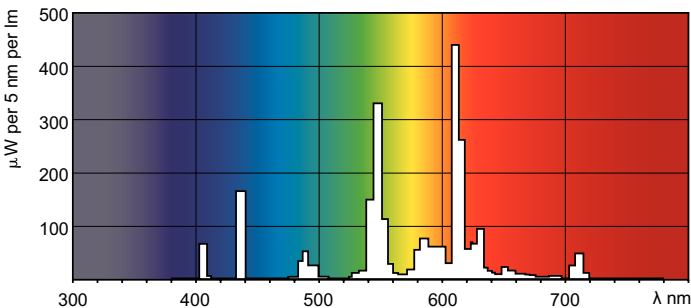


Lightcolour /827

MASTER PL-C 4 Pin

Lifetime

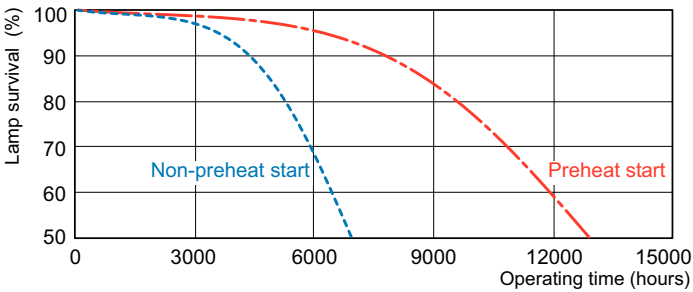

LDLE_PLC4P_0001-Life expectancy diagram

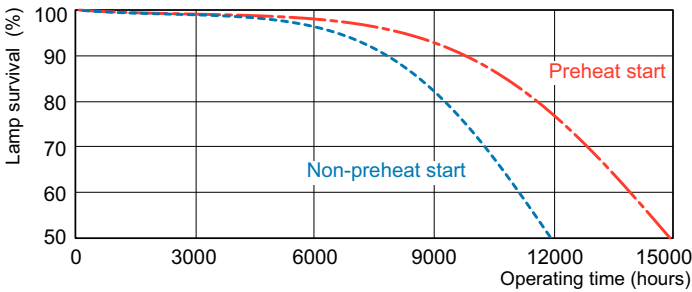

LDLE_PLC4P_0002-Life expectancy diagram



LDLM_PLC4P_0001-Lumen maintenance diagram

