



MASTER PL-C 2 Pin



MASTER PL-C 13W/827/2P 1CT/5X10BOX

Energy-saving compact fluorescent lampsCompact long-arc low-pressure mercury discharge lampEnvelope consists of 4 parallel narrow fluorescent tubes

Warnings and Safety

- \cdot Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position
- · Dimming is not possible
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information			
Cap base	G24D-1 [G24d-1]		
Life to 10% failures (nom.)	6500 h		
Life to 50% failures (nom.)	10000 h		
LSF 2000 h Rated	99 %		
LSF 4000 h Rated	98 %		
LSF 6000 h Rated	92 %		
LSF 8000 h Rated	78 %		
	Sphere		
Light Technical			
Colour Code	827 [CCT of 2,700 K]		
Luminous flux (nom.)	925 lm		
Luminous flux (rated) (nom.)	925 lm		
Colour designation	Incandescent White		
Chromaticity coordinate X (nom.)	0.463		

Chromaticity coordinate Y (nom.)	0.42		
Correlated Colour Temperature (Nom)	2700 K		
Luminous efficacy (rated) (nom.)	69 lm/W		
Colour rendering index (nom.)	82		
LLMF 2000 h Rated	92 %		
LLMF 4000 h Rated	87 %		
LLMF 6000 h Rated	83 %		
LLMF 8000 h Rated	81 %		
Operating and Electrical			
Power (Rated) (Nom)	13.8 W		
Lamp current (nom.)	0.170 A		
Temperature			
Design temperature (nom.)	28 ℃		


Datasheet, 2021, September 2 data subject to change

MASTER PL-C 2 Pin

Controls and Dimming		
Dimmable	No	
Mechanical and Housing		
Cap-base information	2P	
Approval and Application		
Energy Efficiency Class	G	
Mercury (Hg) content (max.)	1.4 mg	
Mercury (Hg) content (nom.)	1.4 mg	
Energy consumption kWh/1,000 hours	14 kWh	
	423278	

Product Data				
Full product code	871150062081170			
Order product name	MASTER PL-C 13W/827/2P 1CT/5X10BOX			
EAN/UPC – product	8711500620811			
Order code	62081170			
Local order code	13PLC8272PIN			
SAP numerator – quantity per pack	1			
Numerator – packs per outer box	50			
SAP material	927904882740			
SAP net weight (piece)	53.600 g			
ILCOS code	FSQ-13/27/1B-I-G24d=1			


Dimensional drawing




PL-C 13W/827/2P

Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
MASTER PL-C 13W/827/2P	27.1 mm	27.1 mm	97.5 mm	117.0 mm	139.4 mm
1CT/5X10BOX					

Photometric data

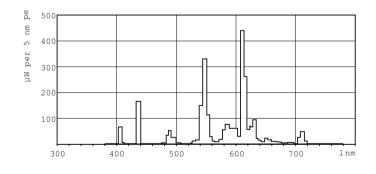


Lightcolour /827

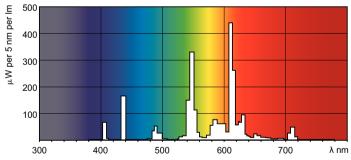

Lightcolour /827


MASTER PL-C 2 Pin


Lifetime

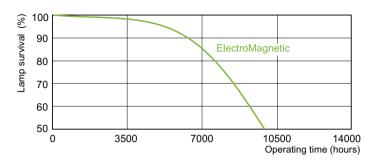



LDLE_PLC2P_0001-Life expectancy diagram



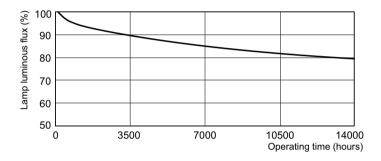

LDLM_PLC2P_0001-Lumen maintenance diagram



© 2021 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.