



MASTER PL-C 4 Pin



MASTER PL-C 26W/827/4P 1CT/5X10BOX

Energy-saving compact fluorescent lampsCompact long-arc low-pressure mercury discharge lampEnvelope consists of 4 parallel narrow fluorescent tubes

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear
- · Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

| General Information | | | |
|-------------------------------------|-----------------------|--|--|
| Cap base | G24Q-3 [G24q-3] | | |
| Life to 50% failures preheat (nom.) | 13000 h | | |
| LSF preheat 2,000 hours rated | 99 % | | |
| LSF preheat 4,000 hours rated | 98 % | | |
| LSF preheat 6,000 hours rated | 97 % | | |
| LSF preheat 8,000 hours rated | 90 % | | |
| | Sphere | | |
| | | | |
| Light Technical | | | |
| Colour Code | 827 [CCT of 2,700 K] | | |
| Luminous flux (nom.) | 1800 lm | | |
| Luminous flux (rated) (nom.) | 1800 lm | | |
| Colour designation | Incandescent White | | |
| Chromaticity coordinate X (nom.) | 0.463 | | |
| Chromaticity coordinate Y (nom.) | 0.42 | | |
| Correlated Colour Temperature (Nom) | 2700 K | | |
| | | | |

| Luminous efficacy (rated) (nom.) | 67 lm/W |
|----------------------------------|---------|
| Colour rendering index (nom.) | 81 |
| LLMF 2000 h Rated | 92 % |
| LLMF 4000 h Rated | 87 % |
| LLMF 6000 h Rated | 83 % |
| LLMF 8000 h Rated | 81 % |
| | |
| Operating and Electrical | |
| Power (Rated) (Nom) | 27.4 W |
| Lamp current (nom.) | 0.335 A |
| | |
| Temperature | |
| Design temperature (nom.) | 28 °C |
| | |
| Controls and Dimming | |
| Dimmable | Yes |
| | |

MASTER PL-C 4 Pin


| Mechanical and Housing | |
|------------------------------------|--------|
| Cap-base information | 4P |
| | |
| Approval and Application | |
| Energy Efficiency Class | G |
| Mercury (Hg) content (max.) | 1.4 mg |
| Mercury (Hg) content (nom.) | 1.4 mg |
| Energy consumption kWh/1,000 hours | 28 kWh |
| | 423304 |
| | |
| Product Data | |

871150062328770

| Order product name | MASTER PL-C 26W/827/4P 1CT/5X10BOX | |
|-----------------------------------|------------------------------------|--|
| EAN/UPC – product | 8711500623287 | |
| Order code | 62328770 | |
| Local order code | 26PLC8274PIN | |
| SAP numerator – quantity per pack | 1 | |
| Numerator – packs per outer box | 50 | |
| SAP material | 927907382740 | |
| SAP net weight (piece) | 60.400 g | |
| ILCOS code | FSQ-26/27/1B-E-G24q=3 | |

Dimensional drawing


Full product code




Product D (max) D (max) A (max) B (max) C (max) MASTER PL-C 26W/827/P 27.1 m 37.1 m 30.5 m 40.0 m 63.9 m YC/5X10BOX 27.1 m 57.1 m

PL-C 26W/827/4P

Photometric data

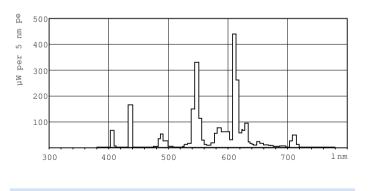


Lightcolour /827

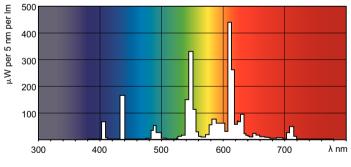



MASTER PL-C 4 Pin

Lifetime

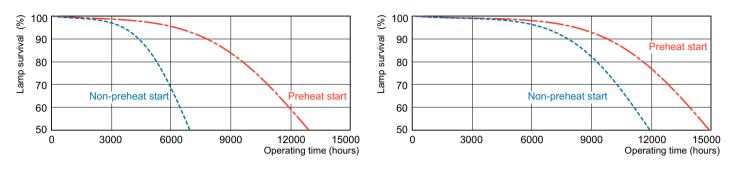



| ☐ 100 IN | | |
|----------|------|--|
| % 100 | | |
| | | |
| | | |

LDLE_PLC4P_0002-Life expectancy diagram

LDLM_PLC4P_0001-Lumen maintenance diagram



© 2021 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2021, September 2 - data subject to change