


Essential Supply Socket Outlets

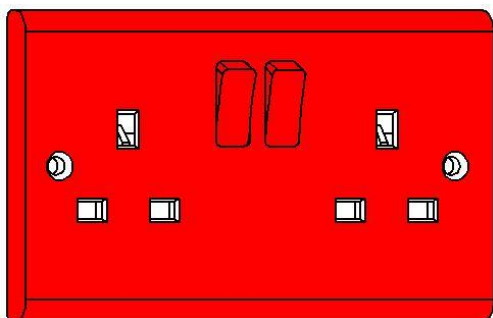

Description

A range of switched sockets with highly visible red rockers and/or face plates, incorporating outboard switches, for use in areas where it is necessary to permanently highlight essential supply circuits.

Features

- Unique slim profile with curved top and bottom edges
- Concave rockers
- Only one size 4mm screwdriver needed
- Clear white markings
- Colour coded terminals
- Top facing terminal screws
- DP switch versions
- 2 earth terminals on DP sockets
- Terminals have large lead-ins
- Outboard switches
- Red rockers and/or faceplates
- 25-year guarantee

Range

2g switched socket with red rockers and white faceplate	S1291
2g switched socket with red rockers and red face plate	S1292
2g switched socket with white outboard rockers and white faceplate	S1293
2g switches socket with red outboard rockers and white faceplate	S1294
2g switched socket with red outboard rockers and red faceplate	S1295

Technical Specification

Voltage rating	250Vac
Current Rating	13A per outlet
Contact gap	3mm
Frontplate material	Urea formaldehyde

Urea flammability classification UL94 grade V-0

No user serviceable parts

Back Boxes

Minimum recommended depth

	Flush 25mm	Dry lining 35mm	Surface 25mm
1g	DB162	DB2540	V1221
2g	DB163	DB2541	V1223

Standards

- BS 1363 Part 2 : 1995

Terminal Capacity

	2.5mm ²	4mm ²	6mm ²	10mm ²
L & N	4	3	2	1