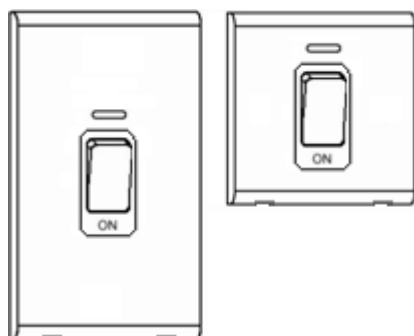


50A DP Switches

**Description**

This uniquely styled range has concealed screws behind a smooth frontplate with the Slimline profile.

Features

- Frontplates supplied in a protective polybag
- Grey font engraving
- Clear white markings
- Colour coded terminals
- Square or tall versions available
- Neon versions available
- Neon leads enclosed
- Earth terminals
- Terminals have large lead-ins
- 25-year guarantee

Range

Switch with neon	8650
Tall switch with neon	8652

Suffix finish with

White with white inserts	WHW
Chrome with white inserts	CHW

Technical Specification

Voltage rating	250Vac
Current Rating	50A per outlet
Contact gap	3mm

No user serviceable parts

For use as an Isolator switch, not for functional switching

Back Boxes

Minimum recommended depth

	Flush 25mm	Dry lining 35mm	Surface 25mm
1g	DB167	DB2542	V1228
2g	DB168	DB2543	V1229

Standards

- BS EN 60669-1

Terminal Capacity

	6mm ²	10mm ²
L & N	2	1