


13A Socket Outlets

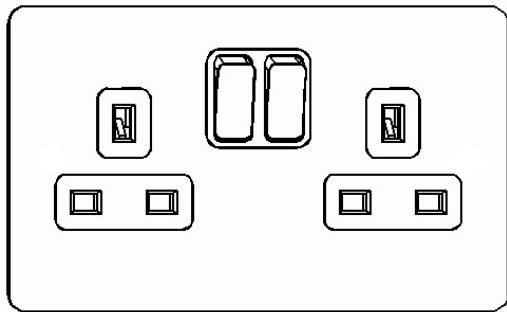

Description

A range of 1g and 2g socket outlets with either single or double switches, or unswitched.

This uniquely styled range has concealed screws behind a smooth frontplate with an ultra slim profile.

Features

- Metal frontplates
- Concave rockers
- Only one size 4mm screwdriver needed
- Clear white markings
- Colour coded terminals
- Top facing terminal screws
- DP switch versions
- 2 earth terminals on DP sockets
- Terminals have large lead-ins
- 25-year guarantee

Range

1 gang switched	8531
2 gang switched	8532
1 gang unswitched	8535
2 gang unswitched	8536

Suffix finish with

Chrome	CH
Stainless Steel	SS
White	WH
White or Black inserts	W or B

Technical Specification

Voltage rating	250Vac
Current Rating	13A per outlet
Contact gap	3mm

No user serviceable parts

Back Boxes

Minimum recommended depth

	Flush 35mm	Dry lining 35mm
1g	DB164	DB2547
2g	DB165	DB2548

Standards

- BS 1363 Part 2

Terminal Capacity

	2.5mm ²	4mm ²	6mm ²	10mm ²
L & N	4	3	2	1