
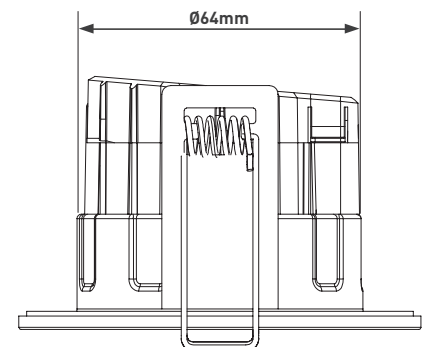


# FTYPE ESSENCE FIRE RATED LED DOWNLIGHT

## Product Features

- Trade rated toolless SpeedFit connector - loop in/out piano key terminals for solid or stranded cable.
- QuickView Cable Window for ease of inspection - check wire connections to terminals after cables secured in place.
- Low profile design for shallow ceiling voids.
- Super slim bezel design for flawless unobtrusive finish.
- Supplied with removable polycarbonate Matt White bezel - ideal for when decorating and painting ceilings.
- Fire tested in 30, 60 and 90 minute solid timber joist, & 30 minute i-joists.
- Acoustic and Air leakage rated.
- Polished Chrome, Brushed Steel & Matt Black bezel accessory available.

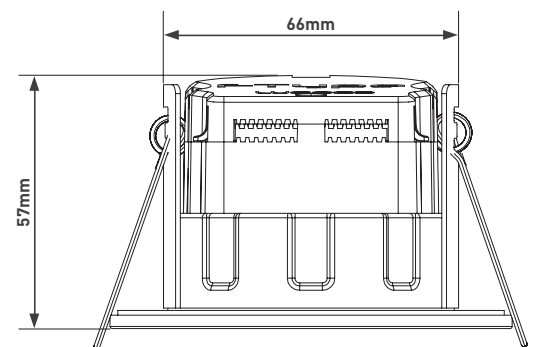

| CAT NO.  | WATTAGE | COLOUR TEMPERATURE | LUMINAIRE LUMEN | USEFUL LUMENS |
|----------|---------|--------------------|-----------------|---------------|
| EFTF5W30 | 5W      | 3000K              | 515lm (3000K)   | 414lm (3000K) |
| EFTF5W40 | 5W      | 4000K              | 550lm (4000K)   | 438lm (4000K) |

| CAT NO.  | BEZEL TYPE | LUMINAIRE LUMENS PER WATT | CRI | BEAM ANGLE | FREQUENCY (V/Hz) | CURRENT | POWER FACTOR | AMBIENT TEMP RATED LIFE (°C) |
|----------|------------|---------------------------|-----|------------|------------------|---------|--------------|------------------------------|
| EFTF5W30 | Flat       | 103lm/W                   | >80 | 60°        | 220-240 / 50-60  | 23mA    | >0.9         | 25°C                         |
| EFTF5W40 | Flat       | 110lm/W                   | >80 | 60°        | 220-240 / 50-60  | 23mA    | >0.9         | 25°C                         |