



Technical Data

Nexus Grid Flex Outlet Modules

Brief product description:

The Nexus Grid range is ideal for domestic, commercial and industrial applications, and allows you to build your own module configurations with a variety of combinations and finishes.

Features:

- Cable entry with cord grip
- Suitable for cables with an outside diameter up to 10mm
- Simple secure 'locate & clip' fitting to frame
- Module to be installed with Grid frame and plate

Product Images




Technical Specifications

Standard(s)	BS 5733
RoHS Directive	No
WEEE Directive	No
Mounting Box Depth (Min)	25mm



Line Diagrams

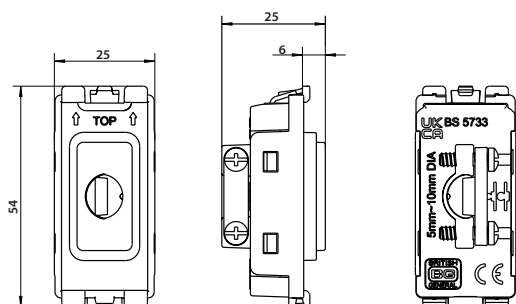



Technical Data

Nexus Grid Flex Outlet Modules

Packaging Information

Cat No.	Description	Packaging Type			Pack Quantity			Barcode		
		Product	Inner Box	Outer Box	Each	Inner Box	Outer Box	Individual	Inner Box	Outer Box
RFLX	Flex Outlet - WH	Bag	Colour Box	Carton	1	10	100	5050765202510	5050765202633	5050765202756
RPCDWFLEX	Flex Outlet - EVWH	Bag	Colour Box	Carton	1	10	100	5050765233187	5050765233224	5050765233262
RPCDBFLEX	Flex Outlet - EVBK	Bag	Colour Box	Carton	1	10	100	5050765233200	5050765233248	5050765233286
RBSFLEX	Flex Outlet - BS	Bag	Colour Box	Carton	1	10	100	5050765202572	5050765202695	5050765202817
RPCFLEX	Flex Outlet - PC	Bag	Colour Box	Carton	1	10	100	5050765202541	5050765202664	5050765202787
RBNFLEX	Flex Outlet - BN	Bag	Colour Box	Carton	1	10	100	5050765202602	5050765202725	5050765202848
RFBFLEX	Flex Outlet - FB	Bag	Colour Box	Carton	1	10	100	5050765239141	5050765239172	5050765239202

Colour Reference:

WH = White; EVWH = Evolve White; EVBK = Evolve Black; BS = Brushed Steel; PC = Polished Chrome; BN = Black Nickel; FB = Matt Black

Weights & Dimensions

Cat No.	Description	Dimensions (H x W x D) cm			Weight (kg)			CBM (m ³)
		Product	Inner Box	Outer Box	Each	Inner Box	Outer Box	Outer Box
RFLX / RPCD*FLEX	Flex Outlet (up to 10mm)	5.4 x 2.5 x 2.2	6.2 x 7.7. x 14.7	16.5 x 16 x 32	0.012	0.15	1.60	0.00845
R**FLEX	Flex Outlet (up to 10mm)	5.4 x 2.5 x 2.2	6.2 x 7.7. x 14.7	16.5 x 16 x 32	0.014	0.17	1.80	0.00845