




- Compact and economic aluminium LED floodlight
- 30W comparable light output of 35W HQI
- 50W comparable light output of 70W HQI
- Bracket design allows installation without removing mounting bracket
- PIR versions complete with manual override facility
- Pre-wired with 1 metre of rubber insulated cable for ease of installation
- Cool white and warm white options available
- LED lifespan L90 36,000 hours
- Non-dimmable



AEDELED30/**



AEDELED30/**/PIR

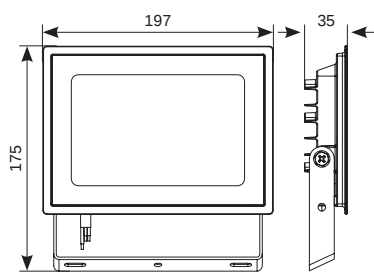

AEDELED50/**

LED Information

Cool White Warm White

Total (Watts)		30W
		50W
Lumens Delivered		
30W	2762lm	2547lm
50W	4359lm	3917lm
Lm/W 30W	92lm	85lm
Lm/W 50W	87lm	78lm
CRI		Ra 80
CCT		4000K
		3000K
Input		220-240V
Hertz		50/60Hz
Operating Temp		-20°C to 40°C

Eden LED Floodlight

Supplied c/w Integral Driver



425



10 Metres
10 Seconds - 7 Minutes
3 - 2000 LUX
Detection Angle - 120°



AEDELED30/CW



AEDELED30/WW/PIR



AEDELED50/CW

	Code	Lamp	Description	Windage
Standard	AEDELED30/CW	LED	30W - Cool White	0.03
PIR	AEDELED30/CW/PIR	LED	30W - c/w PIR - Cool White	0.04
Standard	AEDELED50/CW	LED	50W - Cool White	0.04
PIR	AEDELED50/CW/PIR	LED	50W - c/w PIR - Cool White	0.04
Standard	AEDELED30/WW	LED	30W - Warm White	0.03
PIR	AEDELED30/WW/PIR	LED	30W c/w PIR - Warm White	0.04
Standard	AEDELED50/WW	LED	50W - Warm White	0.04
PIR	AEDELED50/WW/PIR	LED	50W - c/w PIR - Warm White	0.04