

Lodi LED Slim Downlight

Supplied c/w Integral Driver



ALODLED/75/CW



ALODLED/95/WW






ALODLED/110/CW

Ultra-Slim 28mm Profile Depth

Code	Lamp	Description
ALODLED/75/CW	LED	4W - Cool White
ALODLED/95/CW	LED	8W - Cool White
ALODLED/110/CW	LED	11W - Cool White
ALODLED/75/WW	LED	4W - Warm White
ALODLED/95/WW	LED	8W - Warm White
ALODLED/110/WW	LED	11W - Warm White
Accessory ASLED/3NM	LED	1.5W Non-Maintained

- Economic polycarbonate circular LED downlight
- Low profile design with integral driver
- Ideal for use in areas with shallow ceiling voids
- 4W exceeds performance of 12W halogen
- 8W exceeds performance of 20W halogen
- 11W exceeds performance of 20W halogen
- Supplied pre-wired with 300mm of cable
- LED lifespan L70 25,000 hours

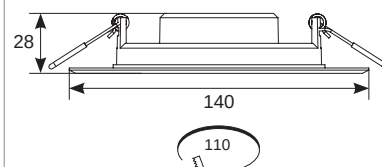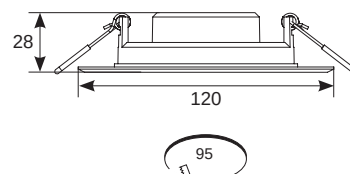

LED Information

Total (Watts)	4W	8W	11W
Lumens Delivered	Cool White	Warm White	
4W	307lm	286lm	
8W	620lm	589lm	
11W	740lm	683lm	
Lm/W 4W	77lm	71lm	
Lm/W 8W	79lm	76lm	
Lm/W 11W	68lm	62lm	
Beam Angle	100°		
CRI	Ra 80		
CCT	4000K		
	3000K		
Input	220V - 240V		
Hertz	50Hz		
Operating Temp	-15°C to 25°C		