


Oxford LED Surface Linear

Supplied c/w Integral Driver




473

- Modern fully enclosed surface luminaire with curved low profile appearance
- This is a widely used style of fitting within the educational sector
- Steel body with polycarbonate diffuser and plastic end caps
- 23W exceeds performance of 1x35W T5
- 34W exceeds performance of 1x49W T5
- 38W exceeds performance of 2x28W T5
- 60W exceeds performance of 2x49W T5
- LED lifespan L70 54,000 hours
- Dimmable options



Powered by
TRIDONIC
▼ enlightening your ideas

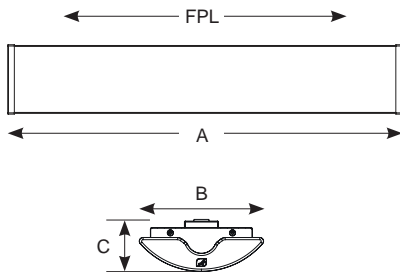

LED Information

Total (Watts)	23W	34W
	38W	60W
Lumens Delivered	2944lm	3668lm
	4248lm	6552lm
Lm/W	128lm	108lm
	111lm	109lm
CRI	Ra 80	
CCT	4000K	
Input	230V	
Hertz	50/60Hz	
Operating Temp	-20°C to 50°C	

Code	Lamp	Description	A	B	C	FPL
AOXLED4	LED	23W - Cool White	1190	165	70	1084
AOXLED5	LED	34W - Cool White	1470	165	70	1384
AOXLED2X4	LED	38W - Cool White	1190	165	70	1084
AOXLED2X5	LED	60W - Cool White	1470	165	70	1364

Options	/M3	Emergency
	/OCTO	OCTO Smart Control
	/DD	Digital Dimming (DD1/DD2/DD3/DD4)



Warrington: +44 (0) 1942 433333
Belfast: +44 (0) 2890 773750

