

Mary

LED Garden Floodlight with Earth Spike



Flexible and dynamic, Mary loves to communicate with others

- Reflector for a sharp, defined light beam
- Complete product with earth spike
- Compatible with THORNeco cable system
- Adaptor with open leads included
- High corrosion resistance (C4) and water ingress protection



Sealed to IP66
for exterior
applications



IK08 rated
impact
resistance



50 000 hours
lifetime



Connection
cable with
integrated
waterstop



Compatible
with THORNeco
cable system


Ideal for...



Building
facades



Gardens

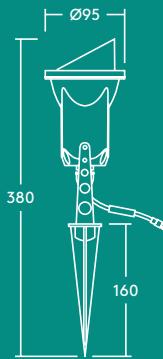

Ordering guide

Description	Wt (kg)	SAP Code
MARY GARDEN SPOT IP66 500 830	0.75	96633583
Accessories:		
ECO PIR SENSOR	0.36	96633592
ECO PC SENSOR	0.36	96634061


Lighting distribution

62lm/W



Mary 500lm

cd/klm ULR: 100 %
DLOR: 0 %
LOR: 100 %



Light source information

- 500lm (8W), 62lm/W
- 3000K
- Lifetime: 50 000 hours rated life (@ L80, Ta 25°C)
- CRI 80
- Class I electrical
- IP66
- IK08
- Ambient operating temperature: -20 to +50°C

Specification

Installation/Mounting

- Earth spike included
- Pre-wired with mains cable and adapter with open leads (1.5 mm²)
- H07RN-F connection cable
- Salt resistant according to corrosion class C4

Material/Finish

Body: aluminium die-cast (RAL 9005)
Screws: stainless steel AISI 316 with GEOMET® 500 coating
Front cover: clear glass

Compatible THORNeco cable system

