



# Rock around the house

tonight

Discover our easy plug&play concept for gardens, pathways and building surrounds. The THORNeco cables, connectors and sensors can be combined easily and are compatible with Leonie (LED floodlight), Mary (LED garden floodlight) and Rosy (LED Inground luminaire). The THORNeco cable system allows quick and safe installation and provides maximum flexibility.

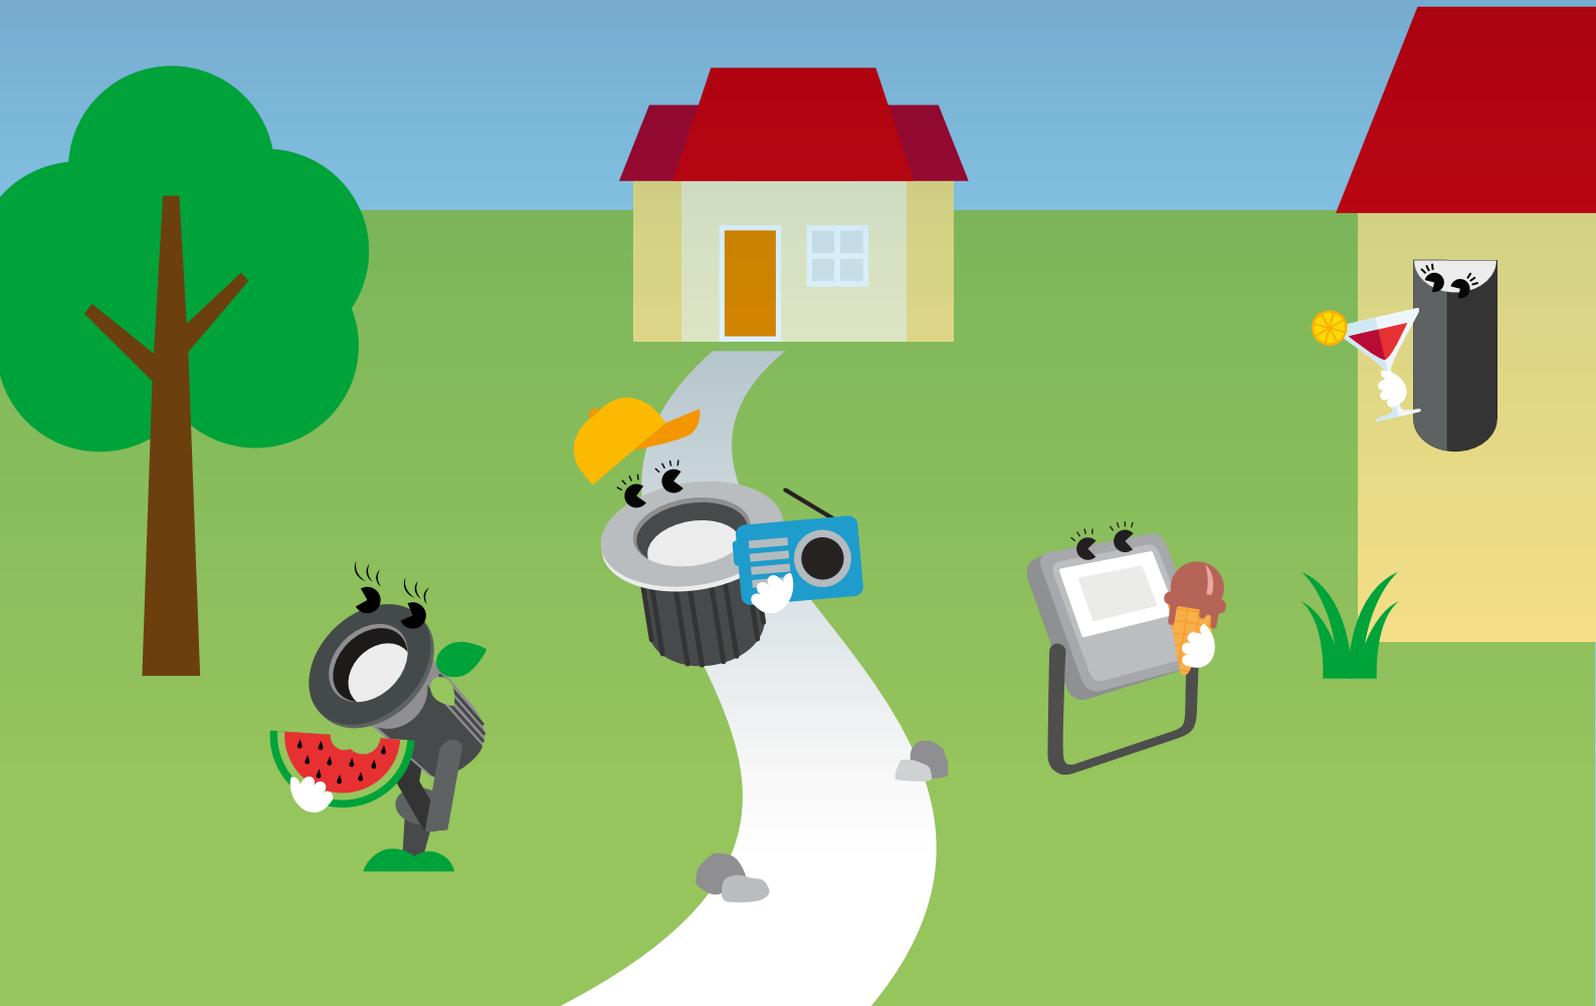

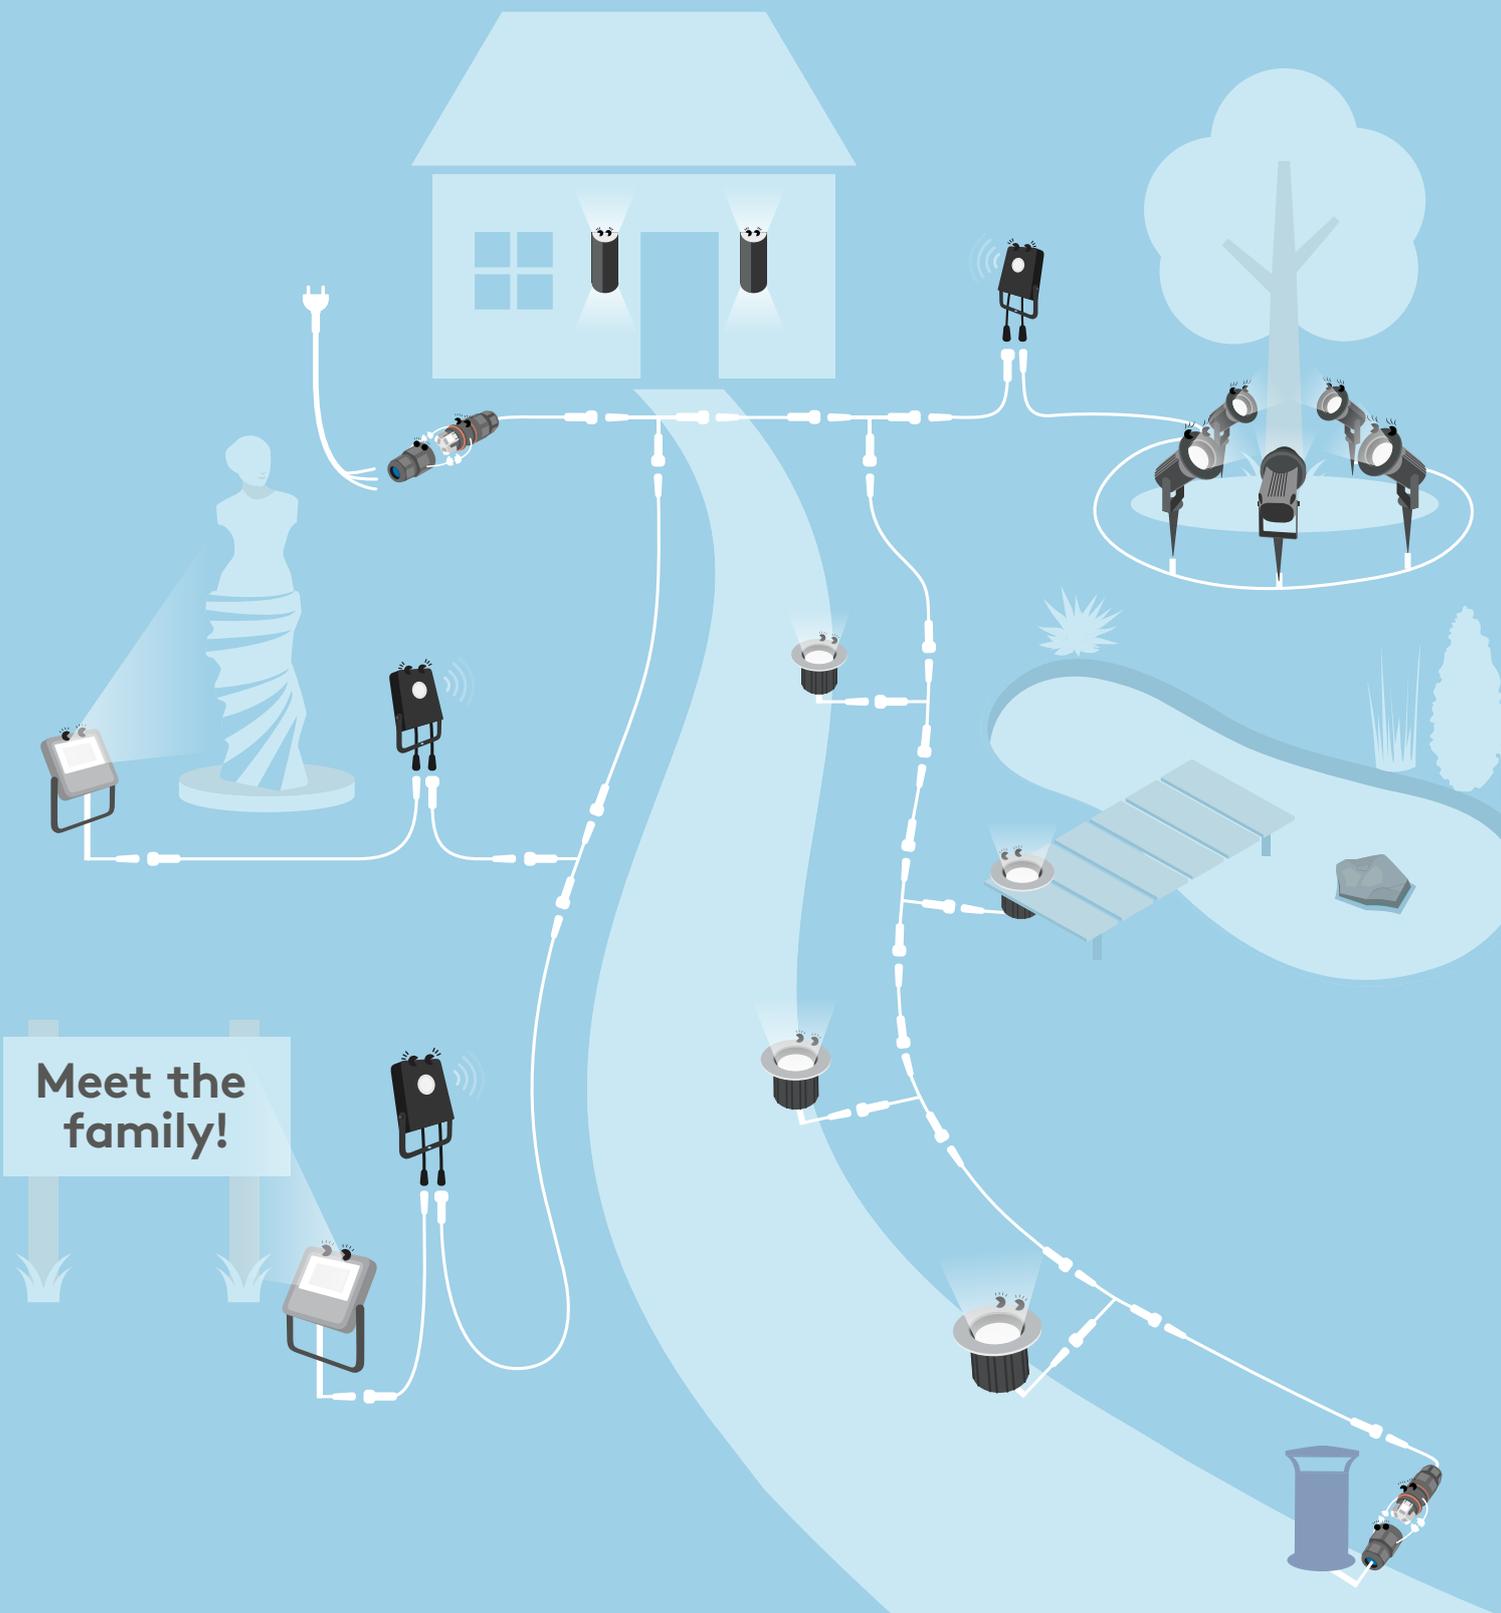

Meet the family!




Mains adaptor



T-Connector



Multiconnector



Extension cable



External integrator

# Accessories

## Around the House

### PIR Sensor

- Including remote control to adapt sensor settings
- Earth spike included, suitable for wall-mounting
- Reliable on/off function thanks to infrared technology
- IP65
- IK04
- Ambient temperature: -20 to +40°C
- Switching load: 1000W
- Electrical class: I
- Connection via THORNeco cable system or adaptor with open leads (included)



| Description    | Wt (kg) | SAP Code |
|----------------|---------|----------|
| ECO PIR SENSOR | 0.36    | 96633592 |

### Photocell


- Including remote control to adapt sensor settings
- Earth spike included, suitable for wall-mounting
- IP65
- IK04
- Ambient temperature: -20 to +40°C
- Switching load: 1000W
- Electrical class: I
- Connection via THORNeco cable system or adaptor with open leads (included)



| Description   | Wt (kg) | SAP Code |
|---------------|---------|----------|
| ECO PC SENSOR | 0.36    | tbd      |



### Conny IP68 Connector

- Quick connector 3 pole
- Tool free
- IP68
- Suitable for outside and inground use
- Cable diameter 6.5 - 12 mm
- Rated cross-section rigid, single and fine stranded 1 - 2.5 mm<sup>2</sup>

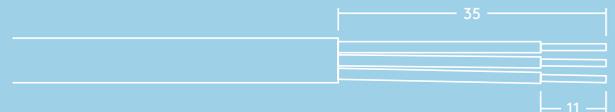





| Description                           | Wt (kg) | SAP Code |
|---------------------------------------|---------|----------|
| CONNYP IP68 QUICK CONNECTOR 16A 3-POL | 0.05    | 96632722 |

Conny IP68 Connector



PIR Sensor / Photocell

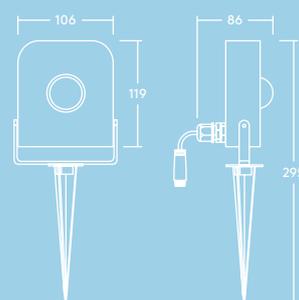

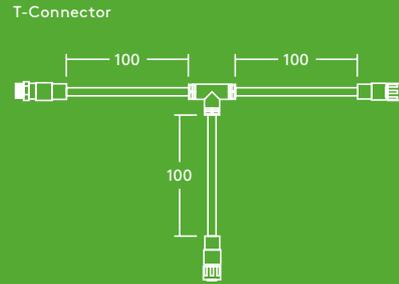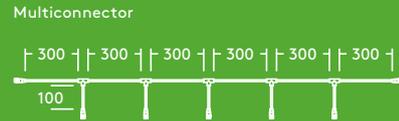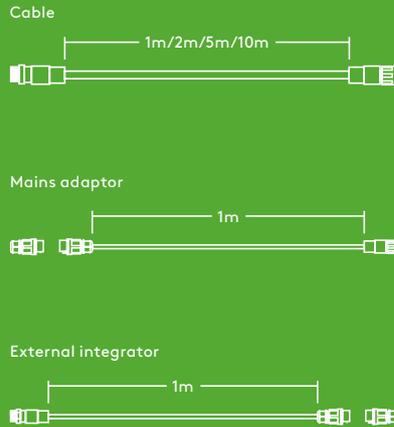

## Cables & Connectors

- Tool free
- 3 pole
- IP68
- High mechanical strength
- Flexible cable H07RN-F 3G1.5 mm<sup>2</sup>
- Cable suitable for outside and inground use\*



**Mains adaptor:** connects luminaires of THORNeco cable system to mains (one side: Conny connector, other side: Female)



**External integrator:** connects luminaires of other suppliers to the THORNeco cable system (one side: Male, other side: Conny connector)

| Description             | Wt (kg) | SAP Code |
|-------------------------|---------|----------|
| ECO EXTENSION CABLE 1M  | 0.16    | 96633584 |
| ECO EXTENSION CABLE 2M  | 0.30    | 96633585 |
| ECO EXTENSION CABLE 5M  | 0.73    | 96633586 |
| ECO EXTENSION CABLE 10M | 1.45    | 96633587 |
| ECO MAINS ADAPTOR       | 0.20    | 96633588 |
| ECO EXT INTEGRATOR      | 0.20    | 96633589 |
| ECO T-CONNECTOR         | 0.14    | 96633590 |
| ECO MULTICONNECTOR      | 0.58    | 96633591 |


\*The suitability might differ according to different national regulations



**Extension cable with Male/ Female connector in different lengths (1m, 2m, 5m, 10m)**



**T-Connector for extension (1 Male, 2 Female)**

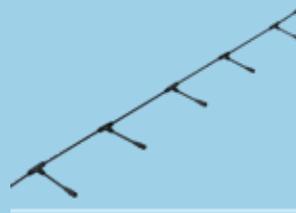

**Multiconnector for extension (1 Male, 6 Female including protection caps)**