

Installation Instructions: Wall Light (04425/04428)

Read these instructions before installation and retain for future reference

This equipment should be installed by a competent electrician



Date	Revision
1.6.2022	2


Installation Instructions

For LED WALL LIGHT

To be installed by qualified electrician

NOTE: Before starting the installation, please read instructions carefully.

Item No: 04425
Weight: 1.9KG $\pm$ 0.2KG
Rated Voltage: AC100-240V 50/60Hz
Rated Power: 30W
Ip rating: IP65
Height of installation $\geq$ 3m

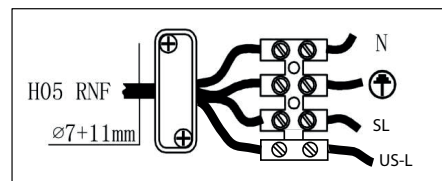


- Suitable for use in industrial areas, parking areas, facades, gardens & parks landscapes.
- Fixture made of die-cast aluminum and heat resistant PC protective shield. Designed for outdoor use. It is recommended that a qualified electrician is consulted or used for the installation of this luminaire and the unit is installed to the current edition of the IEE wiring regulations and Building regulations.
- This luminaire can become very hot do not touch the luminaire until it has cooled down


INSTALLATION

- Remove the diffuser from the base by releasing the captive screws around the edge of the luminaire.
- Use the body to mark the position of the screw holes onto the mounting surface.
- Drill the wall and fit the body using suitable fixing screws / wall plugs.
- Fix the luminaire to a suitable surface. Using the fixing holes.
- Sealant should be applied around the fixing screw heads to reduce water ingress if the luminaire is to be mounted externally.
- Secure the supply cable into the luminaire through the hole(s) provided ensuring that a cable gland, is used and tightened to maintain the IP rating of the luminaire. Connect the cable into the terminal block ensuring correct polarity is observed and that if stranded cable is used no loose strands are left unconnected. This fitting must be earthed.

INSTALLATION SIZE

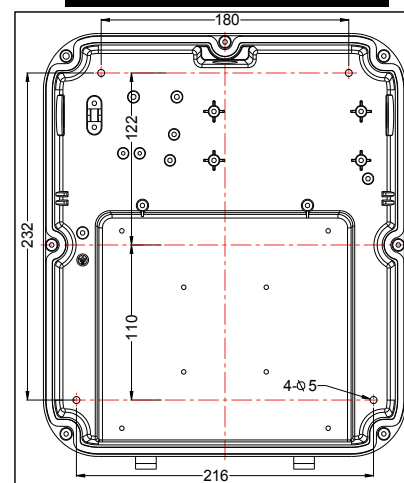

DIMENSION DIAGRAM

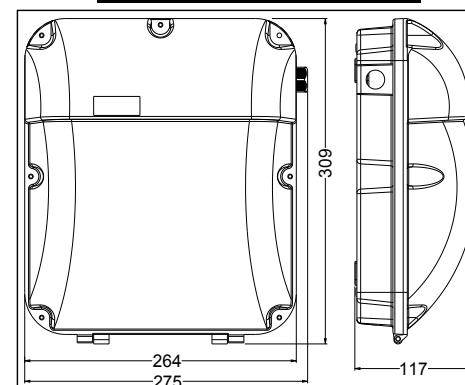

Important Information

We recommend that luminaires are installed by a qualified electrician ensuring the installation complies with current IEE wiring regulations BS7671:2018 & local building control.

- External use only.
- Operating Temperature -30°C to +35°C, emergency versions 0°C to +35°C.
- All tests should be carried out in accordance to EN 50172:2004.



This product may contain substances that can be hazardous to the environment if not disposed of properly. Electrical and electronic equipment should never be disposed of with general household waste but must be separated for its correct treatment and recovery.

Where possible recycle your packaging.



Technical Helpline +44 (0)1924 893380

www.belllighting.co.uk

British Electric Lamps Ltd
Unit A Foxbridge Way, Normanton Industrial Estate
Normanton, West Yorkshire. WF6 1TN

T: +44 (0)1924 893380 F: +44 (0)1924 894320 E: sales@belllighting.co.uk

www.belllighting.co.uk