


13A Socket Outlets

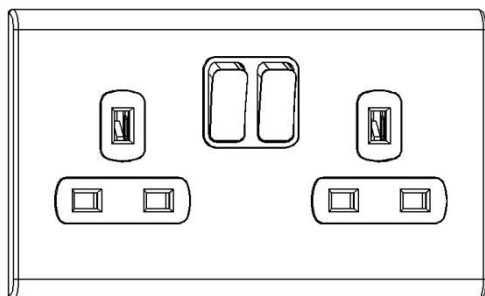

Description

A range of 1g and 2g socket outlets with either single or double switches, or unswitched. This uniquely styled range has concealed screws behind a smooth frontplate with Slimline profile.

Features

- Unique slim profile with curved top and bottom edges
- Frontplates supplied in protective polybag
- Concave rockers
- Only one size 4mm screwdriver needed
- Clear white markings
- Colour coded terminals
- Top facing terminal screws
- DP switch versions
- 2 earth terminals on DP sockets
- Terminals have large lead-ins
- 25-year guarantee

Range

1 gang switched	8631
2 gang switched	8632
1 gang unswitched	8635
2 gang unswitched	8636

Suffix finish with

White with white inserts	WHW
Chrome with white inserts	CHW
Matt Black with black inserts*	MBB

* special order product

Technical Specification

Voltage rating	250Vac
Current Rating	13A per outlet
Contact gap	3mm

No user serviceable parts

Back Boxes

Minimum recommended depth

	Flush 25mm	Dry lining 35mm	Surface 25mm
1g	DB162	DB2540	V1221
2g	DB163	DB2541	V1223

Standards

- BS 1363 Part 2

Terminal Capacity

	2.5mm ²	4mm ²	6mm ²	10mm ²
L & N	4	3	2	1