



BRITICENT SITE ELECTRICS

a deta brand



2023 - 2024



Deta Electrical builds upon its ambition to become the supplier of choice within the electrical wholesale market. The full integration of Channel, Brackenheath and Briticent brands into Deta's Lighting, Fire & Safety division delivers additional value to wholesale partners, providing a best-in-class service to its valued customers with an extensive range of electrical products to include wiring and electrical accessories, cable management systems, lighting, fire and safety products.

DETA | TTE | BRACKENHEATH | BRITICENT | CHANNEL | EVOLO

Mission & Vision

Deta Electrical is continuously focused on offering unrivalled quality, reliability, service and value for money. The company's mission is to use its passion and expertise to provide best-in-class products that meet and exceed ever-changing customer needs.

A brand trusted by customers, Deta is synonymous with high product quality, exceptional product knowledge and a dedicated service. Specialist sales, customer service, technical support, warehousing and distribution teams work together to offer customers a streamlined experience. Robust quality control throughout key stages ensures the delivery of quality products meets industry standards. Furthermore, product knowledge and extensive industry experience result in the desired products and solutions our customers require.

Deta continues to ensure an ethical approach with a commitment to social responsibility, building an inclusive community and protecting the environment for the benefit of future generations. The company holds ISO 9001 and ISO 14001 certification.

Focused on continuous progression, Deta is committed to investments in innovation, advancing through digitalisation and building upon its infrastructure to futureproof services for customers in years to come.



Since its inception in 1908, Briticent Site Electrics has enjoyed over 100 years of successful trading with a long-standing customer base.

Briticent built its reputation on the Gripper® range of handlamps, and over the years has developed a core range of essential site lighting and power distribution products.

Acquired by Deta in 2009, Briticent has led the market with new innovative and energy saving products, becoming the brand of choice for many electrical installers throughout the UK.

Contents

LED Non-Corrosive Fittings	04
REX Slim LED Floodlights	10
Step Down Transformers	14
Cable Reels & Extension Leads	18
Festoon Lighting & Power	22
LED Plasterers Lights	28
LED Task Lights	32
LED Bulkheads	36
Inspection Lighting	42



A low-angle, upward-looking photograph of an industrial facility. In the foreground, several large, dark-colored pipes run diagonally across the frame, supported by a complex network of metal brackets and beams. In the background, a tall, lattice-structured tower or distillation column rises into a clear blue sky. The tower is illuminated with several bright lights, some of which are visible on its upper levels. The overall scene conveys a sense of scale and industrial complexity.

LED Non-Corrosive Fittings

Briticent's **LED Non-Corrosive Fittings** are recognised for their quality and reliability amongst temporary light installers throughout the UK.

The range includes standard and emergency integrated LED fittings in 2ft and 5ft lengths, ideal for use on construction sites as the wide voltage range from 100V to 240V protects against voltage spikes.



High performance site luminaire
with integrated LED offering
135 lm/W

Polycarbonate diffuser and
body construction

New and improved quick fix,
two-part hinged LED tray design

LiFePO4 Lithium emergency
3Hr battery

20mm conduit
knockouts and
besa mounting
options

Wide voltage range
100-240V / 50-60Hz

Pre-wired with a
weatherproof connection
box option available

LED Non-Corrosive Fittings



BI4125

LED Non-Corrosive Fittings

BI4117	2ft 24W 6500K IP65
BI4125	5ft 36W 6500K IP65

LED Non-Corrosive Fittings - Emergency

BI4118	2ft 24W 6500K IP65 EM
BI4126	5ft 36W 6500K IP65 EM


- LED non-corrosive luminaire for site applications
- Lumen output and wattage efficiency of 135lm per watt, requiring less power than the previous range while maintaining the same level of brightness
- 2FT and 5FT options, 24-36W, 3240lm to 4,860lm, 6500K (daylight), 120° beam angle, IP65, 100-240V
- Polycarbonate construction, suitable for surface or suspension mounting, with besa box mounting option
- Built in low voltage protection device to cope in environments where voltage may fluctuate
- Wide voltage range of 100-240V / 50-60Hz
- Easy and quick installation with a quick fix, two-part, hinged LED tray, allowing for a simplified installation. Incorporates 20mm knockouts
- 3-hour emergency duration with LiFePO4 battery options. Pre-wired with 4-Core cable
- IP65 rating for total protection against dust and low-pressure jets of water from any direction
- 2-year guarantee

Emergency


- 3 hours emergency function
- Operating temperature 0°C to +50°C
- Pre-wired with 4-Core cable
- LiFePO4 Lithium battery provides improved energy consumption,

Product Code	BI4117	BI4118	BI4125	BI4126
Size	2ft		5ft	
Wattage	24W		36W	
Lumens	3,240 lm		4,860 lm	
Lumens/Watt	135 lm/W			
Impact Rating	IK08			
IP Rating	IP65			
Colour Temperature	6500K			
Voltage	100-240V (50-60Hz)			
Beam Angle	120°			

LED Non-Corrosive Fittings + Plexo

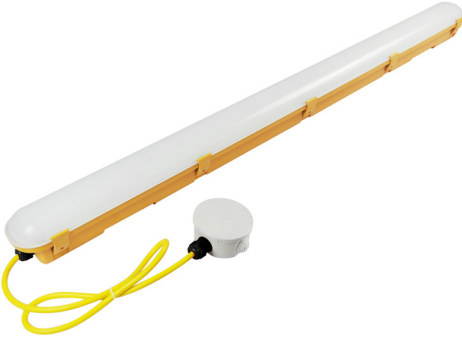

BI4127

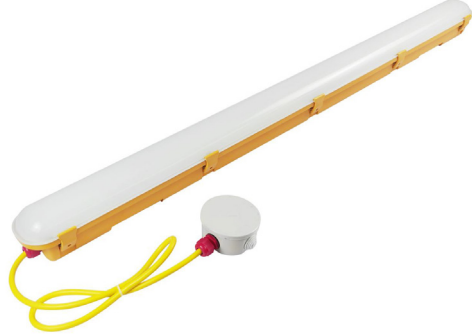

BI4128

LED Non-Corrosive Fittings + Plexo

BI4119	2ft 24W 6500K IP65
BI4127	5ft 36W 6500K IP65

LED Non-Corrosive Fittings + Plexo Emergency

BI4120	2ft 24W 6500K IP65 EM
BI4128	5ft 36W 6500K IP65 EM


- LED non-corrosive luminaire for site applications
- Quick fix options with 1m power lead, terminal box and three cable glands included
- Lumen output and wattage efficiency of 135lm per watt, requiring less power than the previous range while maintaining the same level of brightness
- 2FT and 5FT options, 24-36W, 3240lm to 4,860lm, 6500K (daylight), 120° beam angle, IP65, 100-240V
- Polycarbonate construction, suitable for surface or suspension mounting, with besa box mounting option
- Built in low voltage protection device to cope in environments where voltage may fluctuate
- Wide voltage range of 100-240V / 50-60Hz
- Easy and quick installation with a quick fix, two-part, hinged LED tray allowing for a simplified installation. Incorporates 20mm knockouts
- 3-hour emergency duration with LiFePO4 battery options. Pre-wired with 4-Core cable
- IP65 rating for total protection against dust and low-pressure jets of water from any direction
- 2-year guarantee

Emergency

- 3 hours emergency function
- Operating temperature 0°C to +50°C
- Pre-wired with 4-Core cable

Product Code	BI4119	BI4120	BI4127	BI4128
Size	2ft		5ft	
Wattage	24W		36W	
Lumens	3,240 lm		4,860 lm	
Lumens/Watt	135 lm/W			
Impact Rating	IK08			
IP Rating	IP65			
Colour Temperature	6500K			
Voltage	100-240V (50-60Hz)			
Beam Angle	120°			

LED Linkable Non-Corrosive Fittings

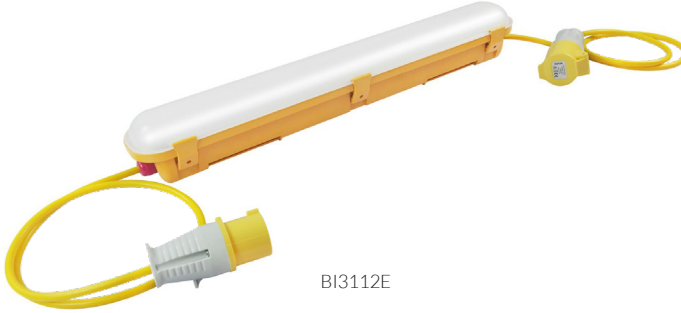

BI3112E

LED Linkable Non-Corrosive Fittings

BI3112 2ft 27W 6500K IP65

LED Linkable Non-Corrosive Fittings - Emergency

BI3112E 2ft 27W 6500K IP65 EM

- Suitable for industrial and commercial applications
- Energy savings of up to 50% compared to fluorescent luminaires
- Available in 2ft option
- Supplied with 1.0m pre wired leads with 110V male and female plugs for quick installation
- Daisy chain up to 20 batten in series
- Wide voltage range 100-240V / 50-60Hz
- Operating temperature -25°C to +50°C (non-emergency only)
- ENEC approved driver

Emergency

- 3 hours emergency function
- Operating temperature 0°C to +50°C
- Pre-wired with 3-Core cable
- LiFePO4 lithium battery provides improved energy consumption, product reliability and lifetime

Product Code	BI3112	BI3112E
Size	2ft	
Wattage	27W	
Lumens	3,240 lm	
Lumens/Watt	120 lm/W	
Impact Rating	IK08	
IP Rating	IP65	
Colour Temperature	6500K	
Voltage	100-240V (50-60Hz)	
Beam Angle	120°	

LED Linkable Non-Corrosive Fittings - Emergency are pre-wired with 3-Core cable, keeping circuits with emergency luminaires permanently on, avoiding battery packs from getting damaged through repetitive discharging.






REX SLIM
FLOODLIGHT

LED Floodlights

Briticent's 110V **REX Slim LED Floodlights** offer installers a range of models from 50W to 300W.

Driver on board technology, combined with a high quality aluminium casing and a toughened glass lens, ensures a sleek yet durable design. A heavy duty, swivel mounting bracket allows the unit to be installed in a range of positions.

Brackenheath (230V) REX Slim and Dual Voltage (100V-240V) REX Asymmetrical Floodlights are also available.

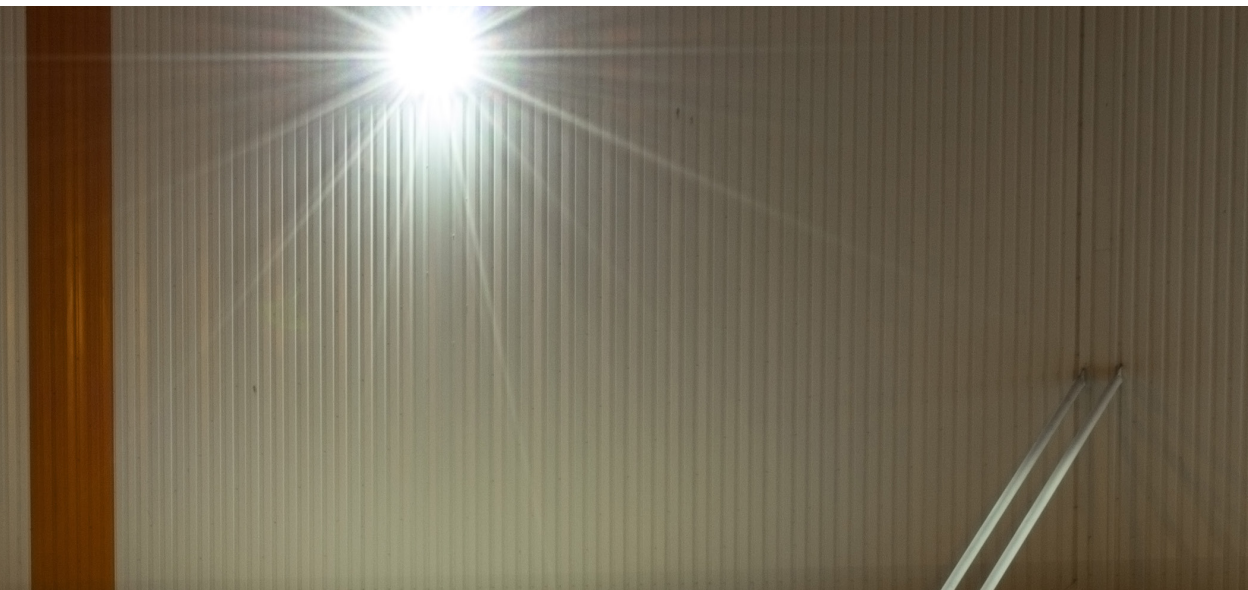


110V driver on board technology
provides sleek appearance

High quality yellow
aluminium body and
toughened glass

Highly efficient
LED chips

Supplied with pre-wired
power cable designed for
construction use

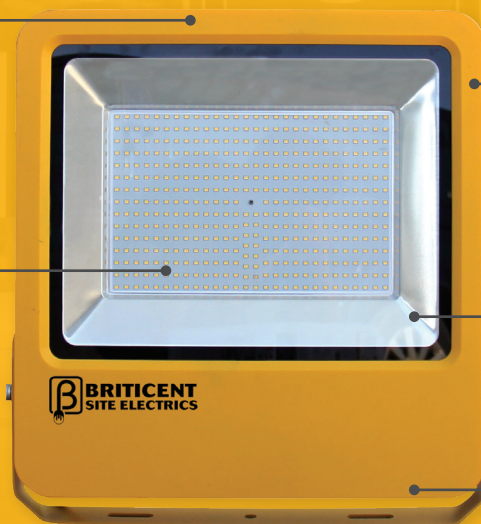

Suitable for industrial and
commercial applications

Rex Slim LED Floodlights 110V



N6280



N6283

Rex Slim 110V

N6279	50W 4000K IP65
N6280	70W 4000K IP65
N6281	100W 4000K IP65
N6282	150W 4000K IP65
N6283	300W 4000K IP65

- Suitable for industrial and commercial applications
- Replaces up to 400W metal halide or sodium fittings
- IP65 rating for total protection against dust and low pressure jets of water
- Highly efficient LED chips
- Driverless technology
- Angled bracket for easy installation
- Pre-wired with 1.5m cable for 70W-300W; 0.5m cable for 50W

Product Code	N6279	N6280	N6281	N6282	N6283
Wattage	50W	70W	100W	150W	300W
Lumens	5,500 lm	7,700 lm	9,900 lm	16,500 lm	33,000 lm
Impact Rating	IK07				
IP Rating	IP65				
Colour Temperature	4000K				
Voltage	110-140V (50-60Hz)				
Beam Angle	120°				

Tripod Accessory Kit



S4100



Suitable for use with 50W, 70W and 100W REX Slim 110V floodlights

Tripod Accessory Kit

S4100

Heavy duty tripod + 2m extension cable

- Ideal for use in industrial and commercial applications
- Supplied with 2m power extension cable and an IP65 weatherproof connector



Step Down Transformers

Briticent's **Step Down Transformers** offer a range of portable and site supply transformers with intermittent ratings from 1kVA to 10kVA.

Portable transformers offer the perfect solution where power needs to be reduced from 230V to 110V and are available in 1kVA, 1.5kVA, 3kVA and 5kVA models.

10kVA MCB protected site supply transformers, incorporating a heavy duty metal casing and stand, are available in both single phase (230V to 110V) or three phase (415V to 110V) models, offering a power distribution solution for construction sites.



Portable Transformers



1000/2/B

3000/2/B

5000/3/B

Portable transformers

1000/2/B	1kVA portable
1500/2/B	1.5kVA portable
3000/2/B	3kVA portable
5000/3/B	5kVA portable

- Suitable for all applications where power needs to be reduced
- 3kVA portable transformer bracket included for output socket protection. Ergonomic design allows smooth lifting of socket covers without any obstructions.
- 230V to 110V
- Robust GRP case with carry handle
- Resettable thermal cutout
- Supplied with 1.5m cable (5000/3/B - 2m) and 13A plug

Product Code	1000/2/B	1500/2/B	3000/2/B	5000/3/B
Intermittent Rating	1.0kVA	1.5kVA	3kVA	5kVA
Continuous Rating	0.6kVA	0.9kVA	1.65kVA	2.8kVA
Cable Length	1.5m			2m
Socket Outlets	2 x 16A	2 x 16A	2 x 16A	2 x 16A 1 x 32A
Weight	10.2kg	10.9kg	17.4kg	32.5kg
Input Voltage	230V			
Output Voltage	110V			
IP Rating	IP44			

Site Transformers



Briticent single and three phase transformers with integrated 100A Isolator offer improved performance, increased convenience, and enhanced energy efficiency, making them an ideal choice for a wide range of applications.

- 'On and Off' switching allowing to isolate the device from the mains when not in use. By doing so, it effectively reduces power consumption during standby. Integrated Isolator significantly extends the longevity of the product, ensuring its durability and reliability.
- 110V working indicator shows whether the transformer is in use or switched off, providing visual confirmation for end users.
- Suitable for power distribution on construction sites
- 'On and Off' power switch in IP65 protective enclosure
- High quality metal casing with heavy duty stand
- MCB protected input and output
- Supplied with 4x16A outlets and 2x32A outlets

Single Phase Transformer

10000/1PH 10kVA step down

Three Phase Transformer

10000/3PH 10kVA step down

Product Code	10000/1PH	10000/3PH
Intermittent Rating	10kVA	10kVA
Continuous Rating	7kVA	7kVA
Socket Outlets	4 x 16A 2 x 32A	4 x 16A 2 x 32A
Weight	71.5kg	81.5kg
Input Voltage	230V	415V 3Ø
Output Voltage	110V	110V
IP Rating	IP23	IP23



10000/1PH



10000/3PH

Power Splitter

- 110V
- Heavy duty steel case with carry handle
- Incorporates four 16A outlets
- Complete with 5m cable and 16A connector

Power Splitter

PS45 Power splitter with cable

Product Code	PS45
Cable length	5m
Cable size	2.5mm
Plug	16A
Socket Outlets	4 x 16A



PS45



Cable Reels & Extension Leads

Briticent's **Cable Reels** offer an efficient portable power solution for sites with all reels incorporating an easy wind handle with rear grip.

Reels are available in a durable open reel design in 25m & 50m lengths in 110V.

Briticent's **Extension Leads** provide a power distribution solution for a range of domestic, commercial and industrial applications.

Available in both 110V and 240V models with 1.5mm or 2.5mm cable, Briticent's 14m & 25m extension leads are ideal for site power requirements.



Designed to withstand
construction site conditions

Safety thermal cut-outs

High visibility yellow
cable and IP44 rated
power connectors



Heavy duty metal
stand for ease of use
with ergonomic grip



110V Cable Reels



- Suitable for use in a range of commercial and industrial applications
- 2 x 110V 16A dust covered outlet sockets
- Easy wind handle and rear grip
- Ergonomically designed
- Integrated power switch
- Easy wind handle and rear grip
- Includes thermal cutout

110V Cable Reels

- SE1030 2g 16A 110V 25m
- SE1040 2g 16A 110V 50m

Length	25m	50m
Amp	16A	
Cable Size	1.5mm	
IP Rating	IP44	
Voltage	110V	
Max Load Unwound	1760W	



SE1030

110V Extension Leads



- Suitable for commercial and industrial applications
- Fitted with plug and coupler
- Couplers supplied with dust covers
- Made with highly durable PVC Cable

110V Extension Leads

SE3010	1.5mm 16A 110V 14m
SE3030	2.5mm 16A 110V 14m



SE3010



SE3030

240V Extension Leads



- Suitable for commercial and industrial applications
- Fitted with plug and coupler
- Couplers supplied with dust covers
- Made with highly durable PVC Cable

240V Extension Leads

SE3020	1.5mm 16A 240V 14m
SE3040	2.5mm 16A 240V 14m



SE3020



SE3040

110V H-Frame Extension Leads



- Suitable for use in a range of commercial and industrial applications
- H-frame provides an easy storage solution
- Couplers supplied with dust covers
- Ergonomically designed
- Made with highly durable PVC Cable

H-frame extension lead

SE3050	1.5mm 16A 110V 25m
SE3070	2.5mm 16A 110V 25m

SE3090	2.5mm 32A 110V 14m
SE3110	2.5mm 32A 110V 25m



SE3110

Product Code	SE3010	SE3030	SE3020	SE3040	SE3050	SE3070	SE3090	SE3110
Length	14m		14m		25m	25m	14m	25m
Amp	16A		16A		16A		32A	
Cable Size	1.5mm	2.5mm	1.5mm	2.5mm	1.5mm	2.5mm		
IP Rating	IP44		IP44		IP44			
Voltage	110V		240V		110V			
Max Load Unwound	1760W		3680W		1760W		3520W	



Festoon Lighting & Power

Briticent's **Festoon Lighting & Power** range provides an ideal temporary lighting solution for use on construction sites.

A number of festoon lighting kits are available to include a 20m integrated LED IP55 kit as well as 22m LED replacement lamp kits with B22 or E27 lampholders.

Festoon lighting accessories include 100m festoon cable, replacement LED GLS lamps, and polycarbonate festoon guards.

Festoon power cable is also offered for applications where site works cover a large area, eliminating the need for multiple extension leads.



High visibility yellow cable for construction site use

IP55 rating for total protection against dust and low pressure

Festoon Lighting Kit - Integrated LED



- Suitable temporary lighting solution for indoor and outdoor use
- Complete 20m kit with 7 fully integrated LED lamps
- 0.75mm cable
- Lamps spaced every 3m
- Supplied with 16A plug in IP44
- IP55 rating for total protection against dust and low pressure jets of water



Festoon Lighting Kit - Integrated LED


SEFLKITINT 7 x 10W 6400K IP55 20m

Product Code	SEFLKITINT
Wattage	7x 10W
Lumens	7x 1,200 lm
IP Rating	IP55
Colour Temperature	6400K
Beam Angle	120°
Voltage	110V
Rated life (Hours)	30,000
Lamp Spacing	3m

Festoon Lighting Kit



- 44m kit with fully integrated LED lamps
- 15x10W lamps spaced every 3m
- 1m lead-in from plug to first lamp
- 0.75mm cable
- Supplied with 16A 110V plug

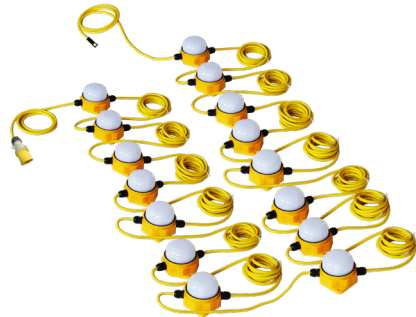

Festoon Lighting Kit

BI2113 15 x 10W 6400K IP55 44m

Product Code	BI2113
Wattage	15x 10W
Lumens	15x 1,200 lm
IP Rating	IP55
Colour Temperature	6400K
Beam Angle	120°
Voltage	110V (50-60Hz)
Rated life (Hours)	30,000

Festoon Lighting Kits



- Suitable temporary lighting solution for indoor and outdoor use
- Complete 22m kit with 10 lamps
- 2.5mm cable
- Lampholders spaced every 2m
- Available with LED GLS lamps
- Available as B22 or E27
- Supplied with 16A plug



Festoon Lighting Kits - LED

SEFLLEDBC 10 x 8W B22 4000K IP44 22m

Product Code	SEFLLEDBC	SEFLEDES
Wattage	10 x 8W	
Lumens	680 lm	
IP Rating	IP44	
Colour Temperature	4000K	
Lamp Spacing	2m	

Festoon Lighting Cable



- Suitable temporary lighting solution for indoor and outdoor use
- Can be used with LED GLS lamp
- 2.5mm cable
- 22m comes with 10 lampholders, spaced every 2m
- 100m comes with 33 lampholders, spaced every 3m
- Available as B22 or E27
- Supplied with 3m lead and 16A plug



Festoon Cable

SEFLKITBC B22 IP44 22m
SEFLKITES E27 IP44 22m
SEFL13B B22 IP44 100m
SEFL13E E27 IP44 100m

Product Code	SEFLKITBC	SEFLKITES	SEFL13B	SEFL13E
IP Rating	IP44			
Voltage	110V			

Lamps & Accessories



- Lamps suitable for use with festoons, bulkheads and other 110V luminaires
- Polycarbonate wire guard for festoon kits
- LED lamps have a wide voltage range from 85-265V
- GLS lamps suitable for outdoor use
- All lamps have B22 or E27 option

LED GLS Lamps

R1010	LED 8W E27 4000K
R1020	LED 8W B22 4000K




R1010



R1020

Accessories

SEPC	Festoon polycarbonate guard
-------------	-----------------------------



SEPC

Product Code	R1010	R1020
Lamp Type	LED GLS	
Lamp Base	E27	B22
Wattage	8W	
Lumens	680 lm	
Impact Rating	IK03	
IP Rating	IP20	
Colour Temperature	4000K	
Voltage	85-265V	

Festoon Power



- Suitable power distribution solution for indoor and outdoor use
- 2.5mm 3-core 110V 100m main cable
- 1.5mm 3-core 110V 1m cable drop with 16A connector
- Power drops at 5m intervals

Festoon Power

PR1005L 16A 110V IP44

Product Code	PR1005L
Drops	20
IP Rating	IP44



Festoon Power + Weatherproof Junction Box



- Suitable power distribution solution for indoor and outdoor use
- 2.5mm 3-core 110V 100m main cable
- 1.5mm 3-core 110V 1m cable drop with 16A connector
- Power drops with rewirable square weather proof boxes at 5m or 10m intervals
- Single or dual power drops options


Single Power Drop with 10m Intervals

BI2112 100m 10 x single power drop at 10m intervals

Dual Power Drop with 5m Intervals

BI2121 100m 19 x dual power drop at 5m intervals

Product Code	BI2112	BI2121
Drops	10 single	19 dual
IP Rating	IP44	






LED Plasterers Lights

Briticent's **LED Plasterers Lights** are available in both 20W 2ft and 30W 5ft options with two 16A outlet connections included as standard for linkable functionality.

Easy to store and transport, this IP65 range is supplied complete with a 5m power lead and a 16A 110V plug.

The 2ft model is available in both A-frame and tripod formats whilst the 5ft tripod range includes an emergency option with patented manual override technology, allowing the 3-hour emergency feature to be overridden at the push of a button.

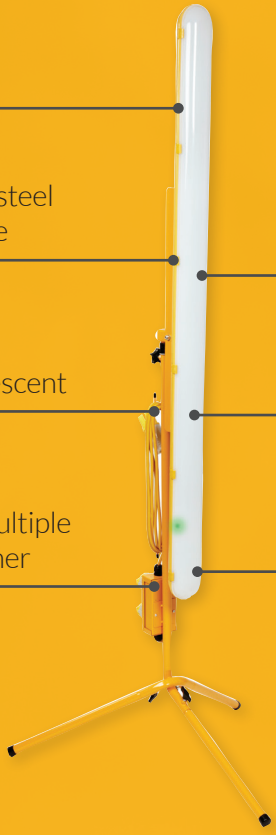

Polycarbonate body
and diffuser

Supplied with foldaway steel
stand for ease of storage

LED range is an ideal
replacement for a fluorescent

2 x 16A 110V outlet
connections allow for multiple
lights to be linked together

IP65 rating for total protection
against dust and low pressure
jets of water

Complete with 5m power lead
and 16A 110V yellow plug

Unique emergency option with
5ft plasterers light

LED 2ft Plasterers Lights



P1000



P1010

LED 2ft Plasterers Lights

P1000 2ft 20W 6300K IP65 A-frame
P1010 2ft 20W 6300K IP65 tripod

- Suitable lighting solution for working in confined spaces
- Supplied with foldaway stand for ease of storage and transportation
- Ideal replacement for fluorescent plasterers lights
- Wide voltage range 100V-277V / 50-60Hz
- Polycarbonate base with opal diffuser and steel stand, complete with LED tray
- IP65 fitting rating for total protection against dust and low pressure jets of water
- Supplied with two 16A IP44 outlet connections for linkable applications
- Complete with 5m power lead and 16A 110V yellow plug
- Operating temperature of -15°C to +50°C

Product Code	P1000	P1010
Wattage	20W	
Lumens	2,200 lm	
Impact Rating	IK08	
IP Rating	IP65	
IP Rating (Sockets)	IP44	
Colour Temperature	6300K	
Voltage	100-277V	

LED 5ft Plasterers Lights



LED 5ft Plasterers Lights

P1020	5ft 30W 6300K IP65 tripod
P1025	5ft 30W 6300K IP65 tripod + EM

Product Code	P1020	P1025
Wattage	30W	
Lumens	3,300 lm	
Impact Rating	IK08	
IP Rating	IP65	
IP Rating (Sockets)	IP44	
Colour Temperature	6300K	
Voltage	100-277V	

- Suitable lighting solution for working in confined spaces
- Supplied with foldaway stand for ease of storage and transportation
- Ideal replacement for fluorescent plasterers lights
- Wide voltage range 100V-277V / 50-60Hz
- Polycarbonate base with opal diffuser and steel stand, complete with LED tray
- IP65 fitting rating for total protection against dust and low pressure jets of water
- Supplied with two 16A IP44 outlet connections for linkable applications
- Complete with 5m power lead and 16A 110V yellow plug
- Operating temperature of -15°C to +50°C (non emergency)

Emergency

- 3 hours emergency feature
- Operating temperature of 0°C to +50°C
- Patented manual override technology allows emergency feature to be overridden at the push of a button



LED Task Lights

Briticent's **LED Task Lights** offer a wide range of compact and portable 110V task lights for use on construction sites.

The range includes linkable task lights and single and twin tripod mounted options.



Suitable for a range of commercial
and industrial applications

Ideal replacement for
a halogen task light

Compact and portable
with tripod options

REX Slim LED Task Lights



S4010



S4110



S4120

REX Slim LED Task Lights

S4010 10W 4000K IP65


REX Slim LED Tripod Lights

S4110 10W 4000K IP65
S4120 2 x 10W 4000K IP65

- 110V
- Suitable for a range of commercial and industrial applications
- Ideal replacement for halogen task lights
- Aluminium body with tempered glass diffuser
- Driver on board technology
- Complete with 2m power lead and 16A connector
- IP65 rating for total protection against dust and low pressure jets of water

Product Code	S4010	S4110	S4120
Wattage	10W		2 x 10W
Lumens	1100 lm		2 x 1100 lm
Impact Rating	IK07		
IP Rating	IP65		
Colour Temperature	4000K		
Voltage	110V		



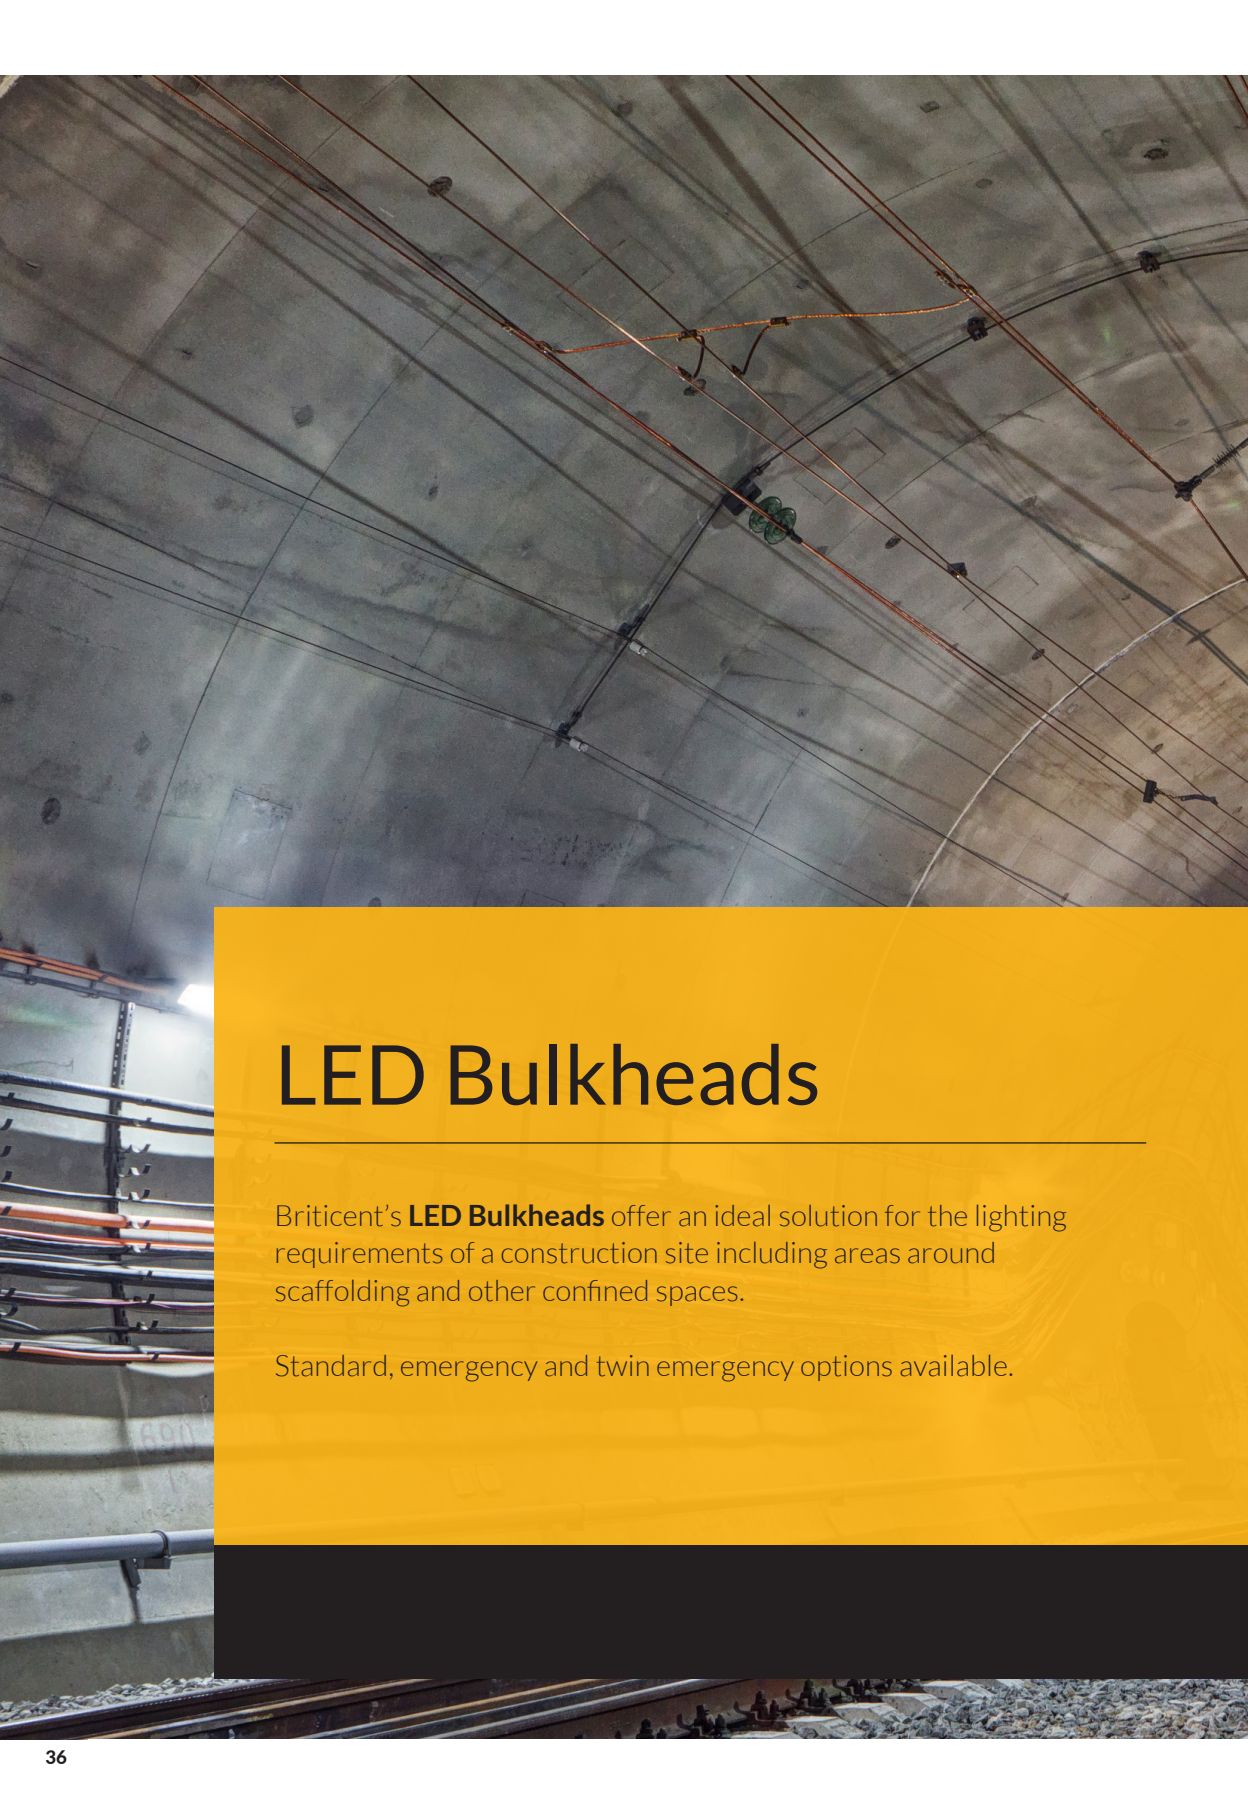

LED Bulkheads


Briticent's **LED Bulkheads** offer an ideal solution for the lighting requirements of a construction site including areas around scaffolding and other confined spaces.

Standard, emergency and twin emergency options available.



Suitable for a range of commercial
and industrial applications

Emergency range available



LED Bulkheads



B2010



B2020

LED Bulkheads

B2010 8W 6000K IP65 - opal

- Suitable for a range of commercial and industrial applications
- Grey polycarbonate body with red or opal diffuser options
- Integrated LED tray - no lamp required
- Suitable for 20mm cable entry with gland conduit
- Power terminals large enough for loop-in/loop-out connections
- IP65 rating for total protection against dust and low pressure jets of water

Product Code	B2010	B2020
Finish	Opal	Red
Voltage	100 - 277V	
Wattage	8W	
Lumens	800 lm	
Impact Rating	IK08	
IP Rating	IP65	
Colour Temperature	6000K	
Beam Angle	120°	
Rated life (Hours)	20,000	



LED Bulkhead - Emergency



E9600

LED Bulkhead - Emergency

E9600 3W 6000K IP65 EM

Product Code	E9600
Voltage	110V
Wattage	3W
Lumens	120 lm
Impact Rating	IK07
IP Rating	IP65
Colour Temperature	6000K
Beam Angle	120°
Rated Life (Hours)	50,000

- Suitable for site, industrial and commercial applications
- Impact resistant polycarbonate diffuser and base
- Supplied maintained and can be wired non-maintained
- Constant light output when operating on mains or battery power
- 3 hour emergency function
- IP65 rating for total protection against dust and low pressure jets of water
- Supplied with legend stickers

LED IP65 Twin Spot - Emergency



LED IP65 Twin Spot - Emergency

E9203 2 x 7.5W 6000K IP65 EM

Product Code	E9203
Wattage	2 x 7.5W
Lumens	470 lm
IP Rating	IP65
Colour Temperature	6000K

- Suitable for site, industrial and commercial applications
- Ideal replacement for old style halogen twin spot fittings
- Non-maintained
- 3 hour battery duration
- Includes bi-colour LED indicator for manual inspection
- Tilt and pan heads allows light to be directed as required
- After 24 hour initial charge a full 3 hour test is automatically performed
- Self-test operation every 28 days for 52 weeks of the year
- Battery 9.6V 2200mAh Nickel Cadmium
- IP65 rating for total protection against dust and low pressure jets of water

An orange car is shown from the front-left side with its hood open. The car is parked in a large, well-lit industrial space, likely a garage or workshop, with large windows in the background. A semi-transparent yellow rectangular box is overlaid on the right side of the image, containing the title and descriptive text. The car's front headlight and grille are visible on the left side of the frame.

LED Inspection Lighting

Briticent's **LED Inspection Lighting** range is designed to assist with lighting requirements in confined spaces and difficult to reach areas.

The 110V and 240V LED Gripper Hand Lamp, for which Briticent has become well known, offers a unique 360° portable lighting solution for inspection requirements on site.

LED Gripper Hand Lamp



- Robust handle made with rubber for high grip
- Detachable handle allows for magnetic mounting for handsfree use
- Fitted with hang up hook and magnetic base
- Supplied with 3m cable for flexibility
- LED lamp reduces heat when working in close proximity
- On/off switch
- Beam angle of 360° for maximum light output
- IP44 rated

LED Gripper Hand Lamp - 110V

BI6111 15W 6500K IP44

LED Gripper Hand Lamp - 240V

BI6121 15W 6500K IP44



BI6111 / BI6121

Product Code	BI6111	BI6121
Finish	Opal	
Plug Type	16A	13A
Wattage	15W	
Lumens	1,500 lm	
Impact Rating	IK08	
IP Rating	IP44	
Colour Temperature	6500K	
Voltage	110V	240V



Ancillaries

Briticent's **Ancillaries** range complements the site electrics range and includes a cable carrier and a cordless kettle.

Cable Carrier




- Capable of carrying weight up to 50kg
- Unit weight up to 2.8kg
- Locking mechanism to prevent accidental closure
- Fold away for easy storage

Cable Carrier

SPAXA Cable carrier

Product Code	SPAXA
Unit weight	2.8kg
Size Closed	380 x 40 x 760mm

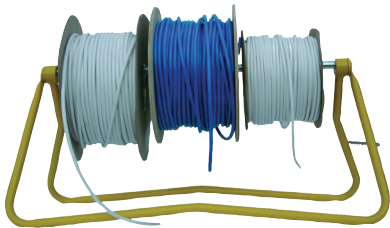

SPAXA

Kettles



- Cordless white kettle
- 1.7l capacity
- Boil dry protection
- 110V supplied with 16A connector
- 240V supplied with 13A plug

Kettles

SEK001 110V 1.7L

Product Code	SEK001
Wattage	1200W
Plug	16A





Deta Electrical Company Limited

Unit 9 Bedford Rd,
Petersfield, GU32 3QA

t: 0845 884 7000

e: sales.lfs@deta.co.uk

w: deta.co.uk