







PRODUCT INFORMATION DOCUMENT

CONSTRUCTION

- Flexible COB LED with 3M adhesive tape
- Silicone covered IP67 version
- Comes on 20m reel

FEATURES

- 7W versions with maximum continuous strip length of 10m
- 14W versions with very high CRI>90 making it ideal in applications requiring accurate colour reproduction
- COB technology providing smooth, continuous light effect
- Indoor and outdoor versions which can be cut every 45mm
- Available range of dimmable and non-dimmable drivers between 15W and 320W
- Remote, wall mounted and CONNECT controllers
- Easy clip connector packs available



	3000K 4000K	RMU720-30 RMU720-40	RMU767-30 RMU767-40	RMU1420-30 RMU1420-40	RMU1467-30 RMU1467-40
Comparable to:	NA	NA	NA	NA	NA
Total Power (W/m):	7.7/ 7.8	7.7/ 7.7	14.7/ 14.1	15.5/ 15.2	
Total Light Output (lm):	750/ 860	670/ 730	89/ 104	76/ 89	
Efficacy (lm/cctW):	97/ 110	180/ 190	330/ 360	270/ 310	
Lux at 1m (lux):	190/220	4000	3000/ 4000	3000/ 4000	
CCT (K):	3000	4000	3000/ 4000	3000/ 4000	
CRI:	80	80	90	90	
IP:	20	67	20	67	
Operation Temperature (°C):	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40	
RG Value:	0	0	0	0	
Dimensions (mm): LxWxH	1000x10x1	1000x12x4	1000x10x1	1000x12x4	
Weight (kg):	0.01	0.08	0.01	0.08	

Connector Packs:

RMUCCT1-CX	IP20/ STRIP-TO-DRIVER, WITHOUT WIRES
RMU-C	IP20/ STRIP-TO-DRIVER, WITHOUT WIRES
RMU-C1	IP20/ STRIP-TO-DRIVER, WITH 150MM WIRES
RMU-C2	IP20/ STRIP-TO-STRIP, WITH 150MM WIRES
RMUCCT1-C12	IP20/ STRIP-TO-DRIVER, WITH 2000MM WIRES
RMUCCT1-L	L CONNECTOR FOR IP20 LED COB STRIP
RMUCCT1-L	T CONNECTOR FOR IP20 LED COB STRIP
RMU67-C	IP67/ STRIP-TO-STRIP, WITHOUT WIRES
RMU67-C1	IP67/ STRIP-TO-DRIVER, WITH 150MM WIRES
RMU67-C2	IP67/ STRIP-TO-STRIP, WITH 150MM WIRES
RMU67-C12	IP67/ STRIP-TO-DRIVER, WITH 2000MM WIRES

Extrusions:

REXS212-23	SURFACE ALUMINIUM EXTRUSION 21MM DEEP 20.5MM INNER WIDTH 2M LONG
REXR212-23	RECESSED ALUMINIUM EXTRUSION 21.7MM DEEP 20.4MM INNER WIDTH 2M LONG
REXS092-23	SURFACE ALUMINIUM EXTRUSION 9.6MM DEEP 16MM INNER WIDTH 2M LONG
REXR092-23	RECESSED ALUMINIUM EXTRUSION 9.6MM DEEP 16MM INNER WIDTH 2M LONG

Product is certified to all the relevant standards.

Please contact our technical department for market specific compliances.

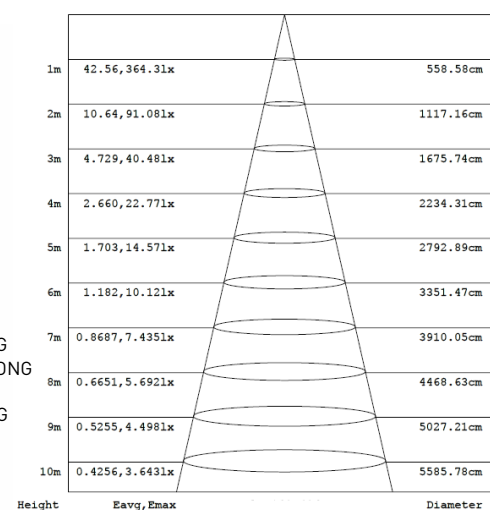


Diagram for RMU1420-40. Other diagrams available on request

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
UK: TEL: 0800 973 220
AUS: TEL: +61 7 3890 5444
NZ: TEL: +050 8 533 335

WEB: WWW.ROBUS.COM
WEB: WWW.ROBUS.COM
WEB: WWW.ROBUS.COM.AU
WEB: WWW.NZ_PURCHASES@ROBUS.COM

LED GROUP EUROPE · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA