


VEGAS PRO LED 24V RGBW

12W, IP20, IP67

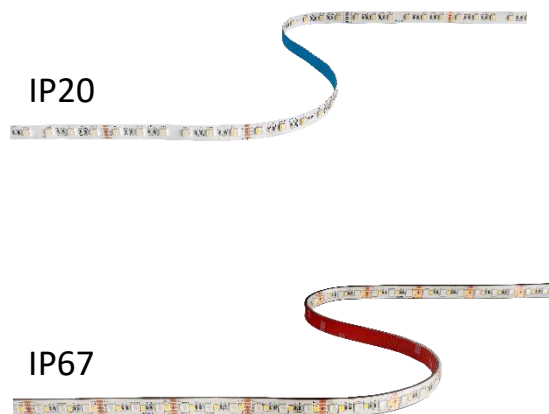



PRODUCT INFORMATION DOCUMENT

CONSTRUCTION

- FPC copper substrate PCB
- 1000mm 2x18AWG input wires
- 3M self-adhesive tape

FEATURES

- Easy to install strips supplied in 30m (IP20) or 30m (IP67) reels
- 2200K, 3000K, 4000K single colour options
- IP20 and IP67 versions for indoor and outdoor applications
- Can be cut every 10cm and reconnected as required with maximum continuous strip length of 10m
- Choose from wide range of power supplies to match the length of used striplight
- Remote and wall mounted controllers available as accessories



Product Code:	IP20 RVA12RGBW2030-30	IP20 RVA12RGBW2030-40	IP67 RVA12RGBW6730-30	IP67 RVA12RGBW6730-40
Comparable to:	NA	NA	NA	NA
Total Power (W/m):	12.0	12.0	12.0	12.0
Power Factor:	NA	NA	NA	NA
Total Light Output (lm):	300	320	290	300
Total Emergency Light Output (lm):	NA	NA	NA	NA
Efficacy (lm/cctW):	73	78	70	70
Lux at 1m (lux):	110	110	100	100
Emergency Lux at 1m (lux):	NA	NA	NA	NA
CCT (K):	RGB+3000	RGB+4000	RGB+3000	RGB+4000
CRI:	80	80	80	80
SDCM:	6	6	6	6
UGR:	25.8	28.5	26.9	26.4
IP:	20	20	67	67
Operation Temperature (°C):	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40
Inrush Current:	NA	NA	NA	NA
Energy Class:	F	F	G	G
Rated Life to L70B50 (Hrs):	50000	50000	50000	50000
Dimensions LxWxH (mm):	30000x12x2	30000x12x2	30000x14x4	30000x14x4
Weight Per 1m(kg):	0.02	0.02	0.06	0.06

Product is certified to all the relevant standards.

Please contact our technical department for market specific compliances.

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
UK: TEL: 0800 973 220
AUS: TEL: +61 7 3890 5444
NZ: TEL: +64 03 668 5285

WEB: ROBUS.COM
WEB: ROBUS.COM
WEB: ROBUS.COM.AU
WEB: ROBUSLED.CO.NZ

LED GROUP EUROPE · UK · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA

VEGAS PRO LED 24V RGBW

12W, IP20, IP67

Cone Illuminance Diagram

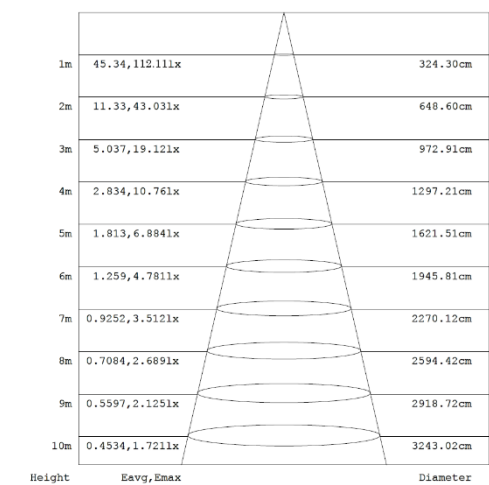


Diagram for RVA12RGBW2030-40 in 4000K. Other diagrams available on request

Polar Intensity Diagram


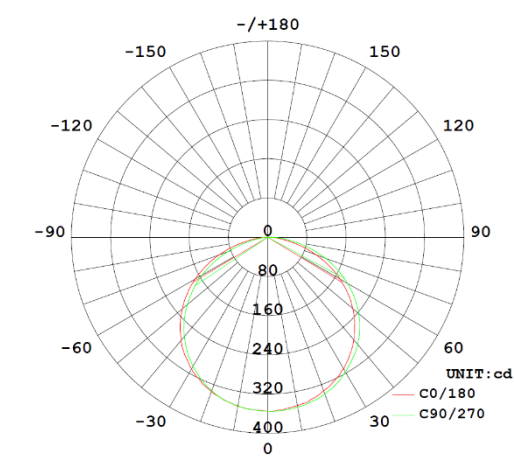


Diagram for RVA12RGBW2030-40 in 4000K. Other diagrams available on request

Dimension Diagram

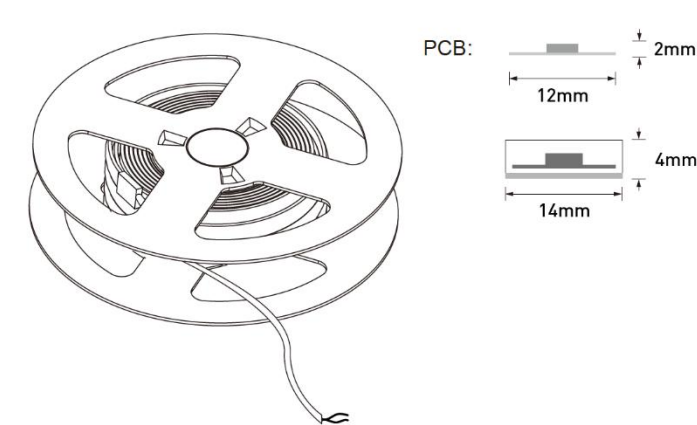

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE:

UK:

AUS:

NZ:

TEL: +353 1 709 9000

TEL: 0800 973 220

TEL: +61 7 3890 5444

TEL: +64 03 668 5285

WEB: ROBUS.COM

WEB: ROBUS.COM

WEB: ROBUS.COM.AU

WEB: ROBUSLED.CO.NZ

LED GROUP EUROPE · UK · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA