


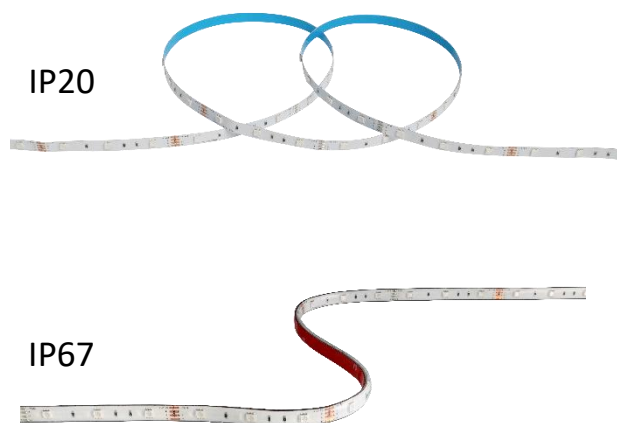




PRODUCT INFORMATION DOCUMENT

CONSTRUCTION



- FPC copper substrate PCB
- 1000mm 2x18AWG input wires
- 3M self-adhesive tape

FEATURES

- Easy to install strips supplied in 50m (IP20) or 30m (IP67) reels
- IP20 and IP67 versions for indoor and outdoor applications
- Can be cut every 5cm and reconnected as required with maximum continuous strip length of 5m
- Choose from wide range of power supplies to match the length of used striplight
- Remote and wall mounted controllers available as accessories



Product Code:	IP20 RVA72RGB2050	IP67 RVA72RGB06730
Comparable to:	NA	NA
Total Power (W/m):	7.2	7.2
CCT (K):	RGB	RGB
IP:	20	67
Operation Temperature (°C):	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40
Inrush Current:	NA	NA
Energy Class:	NA	NA
Rated Life to L70B50 (Hrs):	50000	50000
Dimensions LxWxH (mm):	50000x10x2	30000x12x4
Weight Per 1m(kg):	0.02	0.06

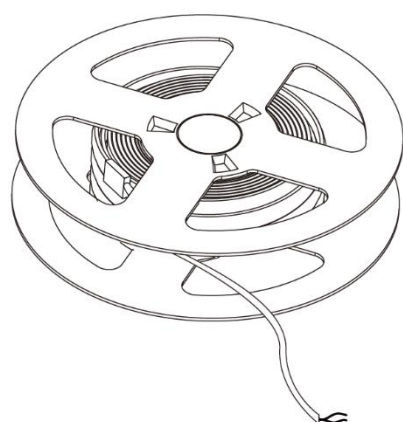

Product is certified to all the relevant standards.

Please contact our technical department for market specific compliances.

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
UK: TEL: 0800 973 220
AUS: TEL: +61 7 3890 5444
NZ: TEL: +64 03 668 5285

WEB: ROBUS.COM
WEB: ROBUS.COM
WEB: ROBUS.COM.AU
WEB: ROBUSLED.CO.NZ

LED GROUP EUROPE · UK · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA