



removable terminal block 3-pole, push-in terminals up to maximal 2 x 1.5 mm² for SIRIUS devices in industrial DIN-rail enclosure , without inscription

product brand name	SIRIUS
product category	Removable terminals
product designation	Terminal for control circuit/3-pole
design of the product	Spring-loaded terminal (push-in)/up to max. 2 x 1.5 mm ²

General technical data	
protection class IP	IP20
Substance Prohibittance (Date)	03/01/2017
type of connectable conductor cross-sections	• solid 1x (0.5 ... 1.5 mm²), 2x (0.5 ... 1.5 mm²) • finely stranded with core end processing 1x (0.5 ... 1.0 mm²), 2x (0.5 ... 1.0 mm²) • finely stranded without core end processing 1x (0.5 ... 1.5 mm²), 2x (0.5 ... 1.5 mm²) • for AWG cables solid 1x (20 ... 16), 2x (20 ... 16) • for AWG cables stranded 1x (20 ... 16), 2x (20 ... 16)
width	7.5 mm

Approvals Certificates		
General Product Approval	Test Certificates	Marine / Shipping



[Type Test Certificates/Test Report](#)



Marine / Shipping	other	Railway	Environment
-------------------	-------	---------	-------------



[Confirmation](#)

[Confirmation](#)

[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3ZY1131-2BA00>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3ZY1131-2BA00>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3ZY1131-2BA00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3ZY1131-2BA00&lang=en

Characteristic: Derating

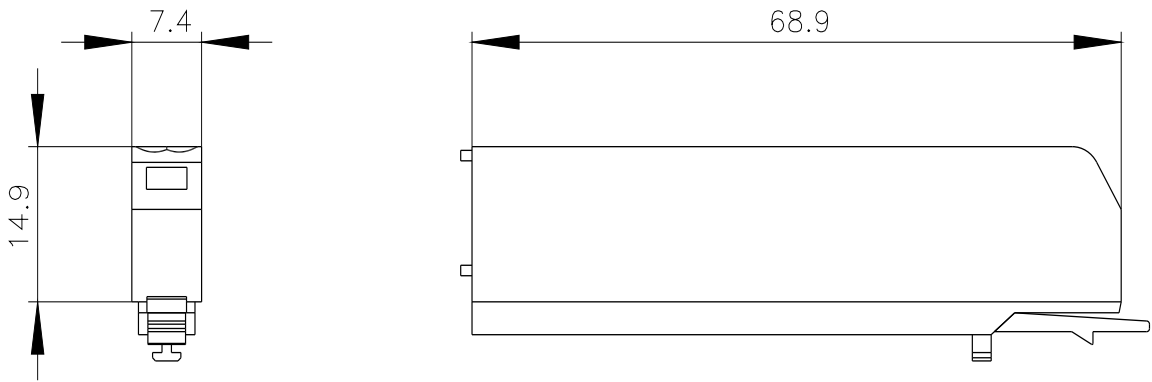

last modified:

1/28/2021 