

BD01-63-3-1 TRUNKING UNIT BD01 63A

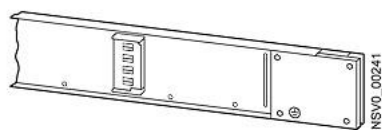


Figure similar

Model	
product designation	trunking unit for BD01 busbar trunking system
product type designation	BD01-63-3-1
General technical data	
configuration of the busbars	L1,L2,L3,N
Voltage	
insulation voltage (Ui)	
• at AC rated value	400 V
• at DC rated value	400 V
operating voltage at AC	
• at 50 Hz rated value maximum	400 V
• at 60 Hz rated value maximum	400 V
Protection class	
protection class IP	IP54
Main circuit	
operating frequency rated value	
• minimum	50 Hz
• maximum	60 Hz
operational current	
• for circuit 1 at AC at 50 Hz rated value maximum	63 A
• for circuit 1 at AC at 60 Hz rated value maximum	63 A
Appearance	
color	light grey
Number	
number of conductors	5
number of conductors without PE	4
Connections	
conductor cross section of the (PE)N	15.7 mm ²
Tap-off points	
arrangement of tap-off points	single-sided
distance between tap-off points	1 m
number of tap-off points maximum	3
Mechanical Design	
height	90 mm
width	25 mm
length	3 000 mm
length of the busbar trunking unit	3 m
fastening method	ceiling / wall
mounting position of the busbar trunking unit	horizontal

material of the busbar

aluminium

Approvals Certificates

General Product Approval



Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=BVP:233553>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/BVP:233553>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=BVP:233553

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

last modified:

7/1/2021 

