



Features

- Integrated LED highbay; Black aluminium housing; 19500Lm; 135 W; 144 Lm/W; 4000K; Drive current: 540mA; CRI 80; 85° beam angle; 0-10V dimmable; IP65; IK08; Lifespan L80:B50 90,000 hrs; (D x H) 321 x 169 mm; 1.5 m mains cable; 1.5 m control cable; 1.2 m chain length including hooks.




Product Overview

Product name	Granit IP65 0-10V 19000lm 840 WB
Technology	LED
Housing	Aluminium
Mount	Suspended
Fixture rating	Enclosed
General application	Logistics & Industry
ETIM Class	EC001716
E-number FI	4357006
Fixture luminous flux (lm)	19500
Luminaire efficacy (lm/W)	144
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	85
Glare control	< 25


Granit IP65 0-10V 19000lm 840 WB 0039596

Photobiological Risk Group	RG1
Total power consumption (W)	135
Electrical protection	Class I
Control gear type	Other
Dimmable	Yes
LED Flickering Rate	Ultra low (5% or less)
Housing colour	Black
IP rating	IP65
IK rating	IK08
Product EAN number	5410288395968
Warranty	5 years
Dimming method	0-10V

Photometry

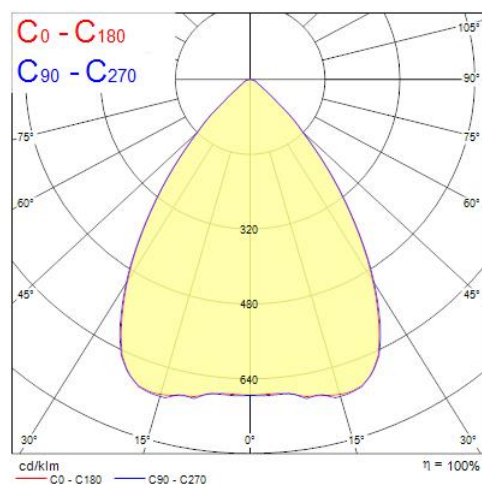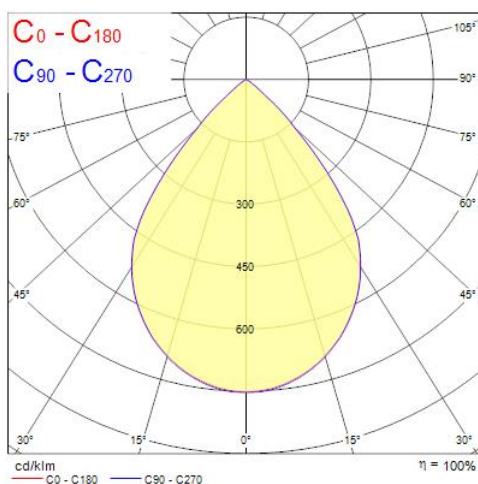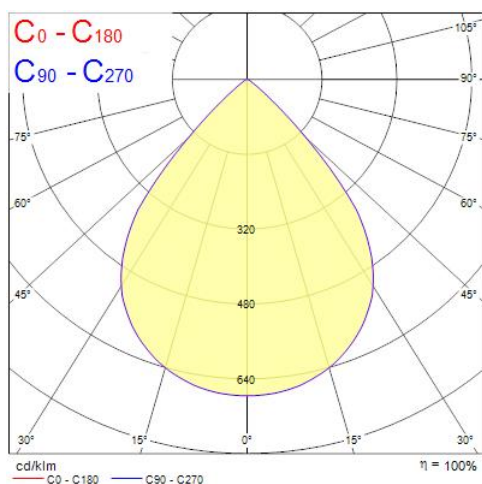

Granit IP65 0-10V 19000lm 840 WB
0039596

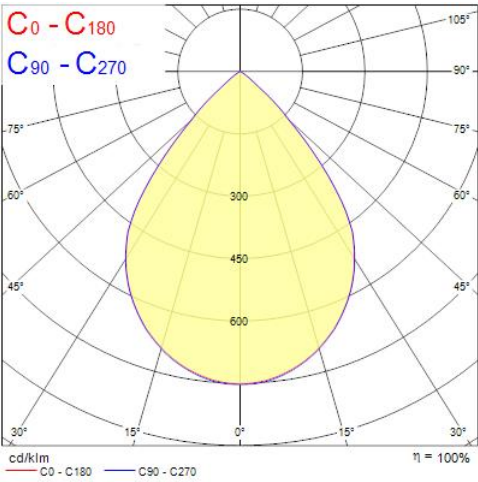


0.5	0.86	E(0°) E(C0) E(C90) E(C270)	54099 40.7° 11808
1.0	1.72	E(0°) E(C0) E(C90) E(C270)	13528 40.7° 2952
1.5	2.58	E(0°) E(C0) E(C90) E(C270)	6011 40.7° 1312
2.0	3.44	E(0°) E(C0) E(C90) E(C270)	3381 40.7° 738
2.5	4.30	E(0°) E(C0) E(C90) E(C270)	2164 40.7° 472
3.0	5.16	E(0°) E(C0) E(C90) E(C270)	1503 40.7° 328

0.5	0.80	E(0°) E(C0) E(C90) E(C270)	56934 38.6° 13534 13748
1.0	1.60	E(0°) E(C0) E(C90) E(C270)	14224 38.6° 3408 3436
1.5	2.39	E(0°) E(C0) E(C90) E(C270)	6322 38.6° 1515 1527
2.0	3.19	E(0°) E(C0) E(C90) E(C270)	3556 38.6° 852 859
2.5	3.99	E(0°) E(C0) E(C90) E(C270)	2278 38.6° 545 550
3.0	4.79	E(0°) E(C0) E(C90) E(C270)	1580 38.6° 379 382

0.5	0.76	E(0°) E(C0) E(C90) E(C270)	51252 37.1° 13610 13606
1.0	1.51	E(0°) E(C0) E(C90) E(C270)	12813 37.1° 3403 3402
1.5	2.27	E(0°) E(C0) E(C90) E(C270)	5696 37.1° 1512 1512
2.0	3.03	E(0°) E(C0) E(C90) E(C270)	3203 37.1° 851 850
2.5	3.78	E(0°) E(C0) E(C90) E(C270)	2050 37.1° 544 544
3.0	4.54	E(0°) E(C0) E(C90) E(C270)	1424 37.1° 378 378

0.5	0.80	E(0°) E(C0) E(C90) E(C270)	56796 38.6° 13610 13722
1.0	1.60	E(0°) E(C0) E(C90) E(C270)	14199 38.6° 3403 3430
1.5	2.39	E(0°) E(C0) E(C90) E(C270)	6311 38.6° 1512 1525
2.0	3.19	E(0°) E(C0) E(C90) E(C270)	3550 38.6° 851 858
2.5	3.99	E(0°) E(C0) E(C90) E(C270)	2272 38.6° 544 549
3.0	4.79	E(0°) E(C0) E(C90) E(C270)	1578 38.6° 378 381

Technical drawings

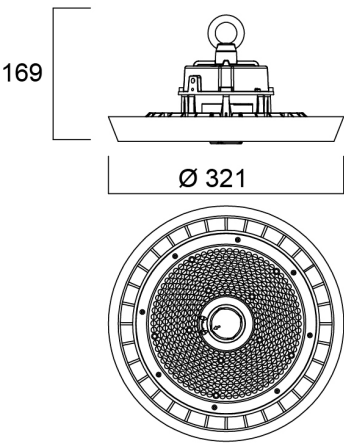

Data table

GENERAL DATA

Product name	Granit IP65 0-10V 19000lm 840 WB
Technology	LED
Housing	Aluminium
Mount	Suspended
Fixture rating	Enclosed
General application	Logistics & Industry
Operating temperature range (°C)	-30°C...+50°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001716
E-number FI	4357006
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	19500
Luminaire efficacy (lm/W)	144

Granit IP65 0-10V 19000lm 840 WB 0039596

Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	85
Glare control	< 25
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	135
Mains voltage (V)	220-240V
Lamp power factor	1
THD (at 230 V, 50 Hz, full load, at 100% dimming level) $\leq$ xx.x %	10
Electrical protection	Class I
Control gear required	No
Control gear type	Other
Dimmable	Yes
Dimming method	0-10V
Drive current (mA)	540
Inrush Current (A)	82.7
Inrush Duration (μ s)	620
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	10
Max. Luminaires per 13A C Breaker	13
Max. Luminaires per 16A C Breaker	16
Max. Luminaires per 20A C Breaker	20
Max. Luminaires per 10A B Breaker	6
Max. Luminaires per 13A B Breaker	7
Max. Luminaires per 16A B Breaker	9
Max. Luminaires per 20A B Breaker	12

LIFETIME DATA

Lifespan L80 B50	90000
Lifespan L80 B20	70000
Lifespan L80 B10	65000
Lifespan L90 B50	45000

PHYSICAL DATA

Housing colour	Black
IP rating	IP65
IK rating	IK08
Diffuser finish	Transparent
Diffuser material	PC Polycarbonate
Nominal Product Height (mm)	169
Nominal Product Diameter (mm)	321
Weight (kg)	3.46

PACKAGING

Single packaging type	Carton
Product EAN number	5410288395968
Packaging single length / height (cm)	38.0
Packaging single width (cm)	38.0
Packaging single depth (cm)	18.5
DUN14 (outer)	05410288395968
Units per outer package	1
Packaging outer length / height (cm)	38.0
Packaging outer width (cm)	38.0
Packaging outer depth (cm)	18.5

SAFETY DATA

Optimal operating condition (°C)	-30-50
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No

SYLVANIA

Granit IP65 0-10V 19000lm 840 WB

0039596

Light your world