

Recessed Led Panel

96631169 REXEL PANEL 12x6 5600 L840 UGR19 TPA E3

Product Image



Description

Recessed LED panel UGR<19 Elegant and timeless design with slim metal frame. Diffuser with fully homogenous illumination. Even surface UGR<19: gentle, soft and glare-free lighting for office applications. Tool-free installation (piano key terminal for up to 2.5 mm² wires). Replaces conventional luminaires with 4 x 36 W T8 and offers up to 60 % energy saving. Suitable for lay-in installation, suspension and surface mounting.

Materials: Frame: Aluminum Diffuser: TP(a) rated diffuser, micro-prismatic Light guide plate: PC Backplate: metal, white (RAL 9016) Complete with 4000K LED, 5600lm. 3 hours Emergency Lighting. Class II electrical, IP44 (IP20 from above), IK03. Rated median useful life: 50.000h L70B50 at 25°C


Key features

- 4000K colour temperature
- 3400lm light output
- UGR<19 suitable for office applications
- TP(a) rated diffuser
- 3 hours Emergency Lighting
- Indicator LED with holder
- Loop in loop out terminal block
- Homogeneous light Surface


Technical details

- IP44 (Ip20 from above)
- 240V 50/60Hz
- Standards BS EN 60598, CE
- Complies with the RoHS Directive
- Electrical Safety Class 2

Dimensions

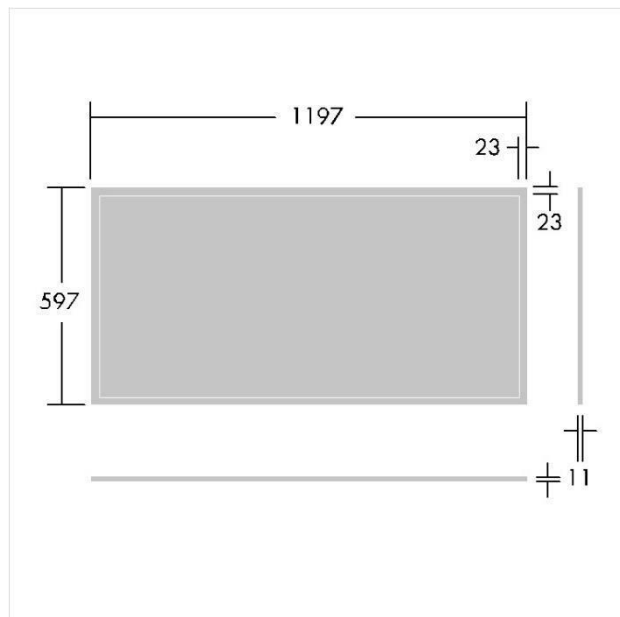

Photometric Data

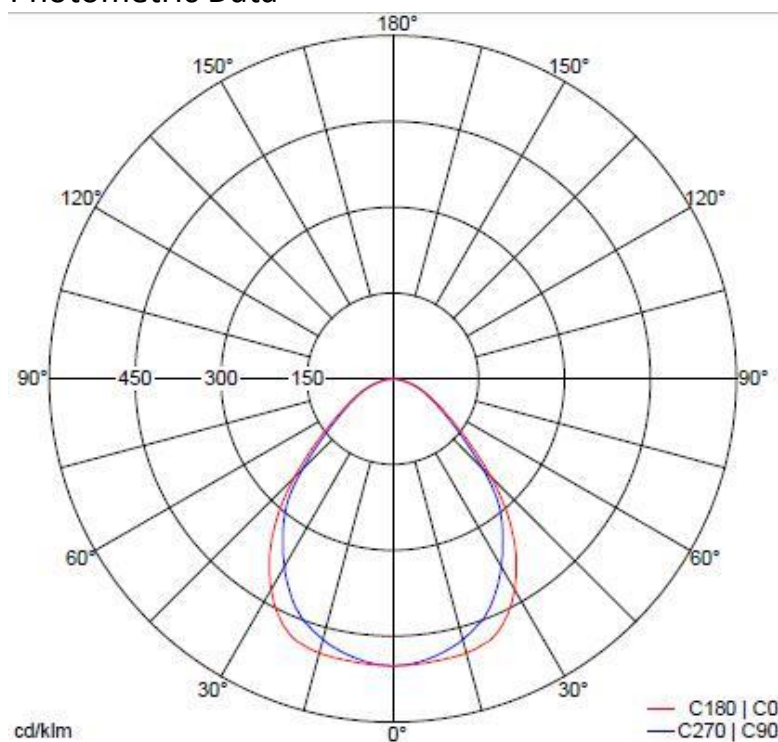

Date completed by manufacturer:

