


Lightweight compact aerial with an effective, simple, robust design.

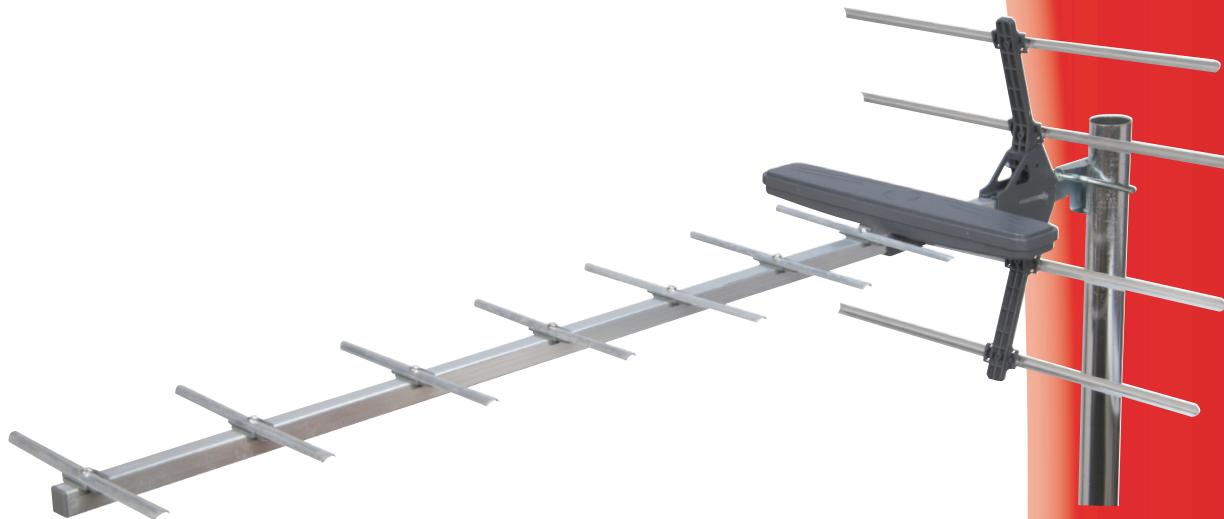

LABGT12G

12 Element

- Medium gain aerial for strong and medium strength signal areas
- F type connector for secure connection
- Fast simple assembly - clip in reflectors
- Tuned to Group T, Ch: 21-60, Freq. 460-790MHz

The LABGT12G is individually packed in a polybag with mast clamp, f connector, rubber weather boot and installation guide.

Specifications	LABGT12G
Frequency Range	470-790MHz
TV Channels	21-60
Forward Gain dBi	13dBi
Front to Back Ratio	>14dB
Beam Width +/- deg.	+/-20°
Connector	F-Type
Length	876mm
Width	343mm