


SPECIFICATION SHEET

Product Code VP*425#

Description 10AX 1 Gang Intermediate 'Ingot' (Modular)

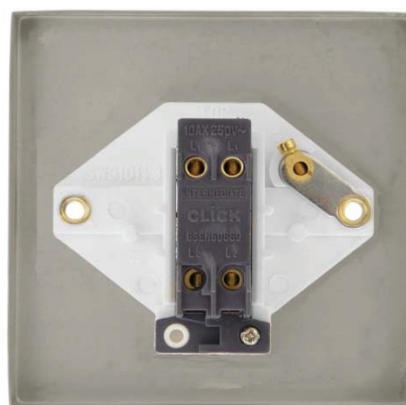

General Information	
Dimensions	88mm x 88mm x 8mm (Excluding Gasket)
Finishes Available	Replace * with: AB (Antique Brass), BN (Black Nickel), BR (Polished Brass), CH (Polished Chrome), PN (Pearl Nickel), SB (Satin Brass), SC (Satin Chrome), and SS (Stainless Steel).
Inserts Available	Replace # with: WH (White) and BK (Black). Black or White gasket supplied to match appropriate inserts. (Antique Brass and Black Nickel are only available with back inserts).
Material Composition	Rear Housing: Nylon Front Plate: Stainless Steel Terminals: Brass Earth Strap: Mild Steel Terminal Screws: Steel and Yellow Passivated Silver "on-lay" copper/brass contacts.
Back Box Depth	16mm – 47mm
Cable Size	4 x 1.5mm ² or 2 x 2.5mm ²
Terminal Size	Live: 3.5mm Earth: 3.5mm
Load Rating	10AX (Suitable for Inductive loads)
Modular	Yes
Gang	1
2 Way	No
Intermediate	Yes
Warranty	10 Years Domestic

Standards BS EN 60669

Additional Information

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
Interchangeable with switches in the MiniGrid system.

