

Connection Products

DIN Rail and Mounting Brackets

A range of Top Hat and G Type din rail. Mounting brackets also available.

Features and Benefits


- Top hat or G Rail
- Zinc coated
- Plain or slotted
- Available in 1 or 2 metre lengths



Din Rail.

TYPE	Description		Rail Depth mm	Rail Width mm	Weight (kg/m)	Pack Cont.
TS1520X2M	Mini Top Hat	Standard	5.5 x 10.5	15	0.165	20 x 2m
TS15F20X2M	Mini Top Hat	Slotted	5.5 x 10.5	15	0.14	20 x 2m
TS3220X2M	G Type	Standard	5.5 x 10.5	32	0.73	20 x 2m
TS32F620X2M	G Type	Slotted	5.5 x 10.5	32	0.69	20 x 2m
TS3520X2M	Top Hat	Standard	7.5 x 27	35	0.35	20 x 2m
TS35F620X2M	Top Hat	Slotted	7.5 x 27	35	0.3	20 x 2m
TS35S20X2M	Top Hat	Standard	15 x 27	35	0.39	20 x 2m
TS35C20X2M	Deep Top Hat	Standard	15 x 27	35	0.67	20 x 2m
TS35CF620X2M	Deep Top Hat	Slotted	5.5 x 10.5	35	0.615	20 x 2m
TS15F10X1M	Mini Top Hat	Slotted	5.5 x 10.5	15	0.14	10 x 1m
TS3210X1M	G Type	Standard	5.5 x 10.5	32	0.73	10 x 1m
TS3510X1M	Top Hat	Standard	7.5 x 27	35	0.35	10 x 1m
TS35F610X1M	Top Hat	Slotted	7.5 x 27	35	0.3	10 x 1m

A range of mounting / support brackets available angled or straight

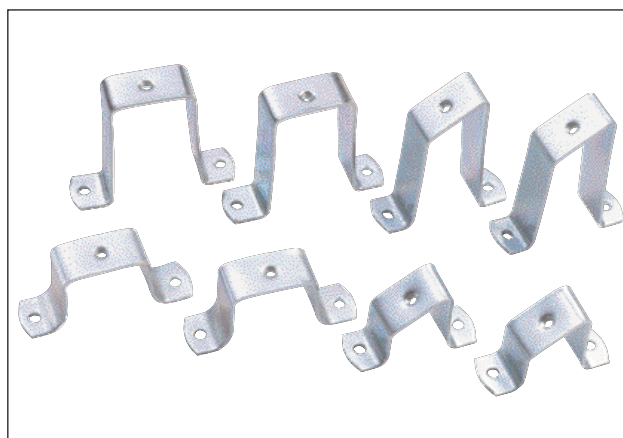

Mounting Brackets.

TYPE	Type	Height mm	Fixing	Pack Cont.
BK0425	Angled	42	M6	2
TS-5M6	Angled	48	M6	1
BK0805	Angled	82	M6	2
BK0201	Straight	20	M6	2
BK0441	Straight	41	M6	2
BK0706	Straight	70	M6	2
BK0904	Straight	90	M6	2
CSK6.3	Screws to Suit	-	M6	10