

Enclosed Changeover Switch

NLSWC0252E




- Under Load Operation
- Earth Terminal Included
- Captive + / - Terminal Screws
- Padlockable in the OFF Position (up to 3 Padlocks)
- IP65 / Lid Interlocked with Switch in Position 1 and 2
- Manufactured to IEC60947-3
- Multiple Knock-outs
- 2 Pole Switch Ratings at AC-21



⚠ Important Safety Notice

It is the responsibility of the person installing the electrical equipment to ensure that the installation meets the requirements of the IET wiring regulations and is therefore 'fit for purpose'. Factors such as correct selection of components, cable sizing, protective devices and Earth bonding are all critical and should be checked prior to full testing and power-up. Any other regulations applicable to the equipment being installed such as the Machinery Directive and current health and safety legislation must also be adhered to. Terminals, including factory fitted, should be checked periodically to ensure correct tightness.

DO NOT USE POWER TOOLS ON THESE PRODUCTS

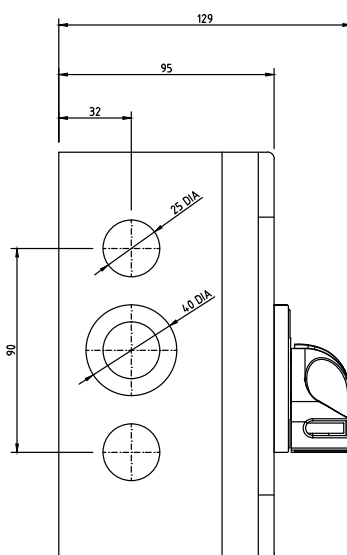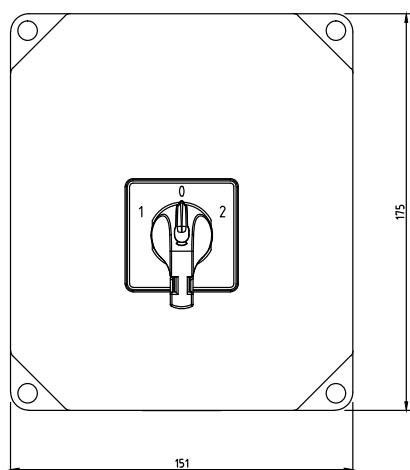
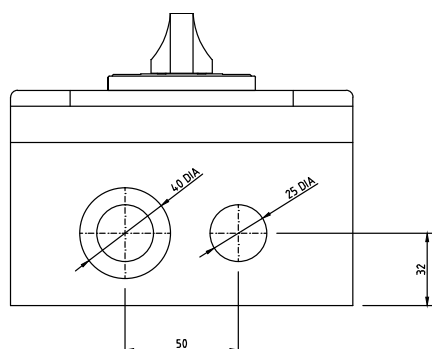


Electrical Ratings (According to IEC60947-3)

AC Rated Thermal Current I _{th} (40°C)	25A
Rated Insulation Voltage U _i (V)	500
Rated Impulse Withstand Voltage U _{imp} (kV)	6

AC Rated Operational Current I_e (A)

Rated Voltage	Utilization Category	I _e
415 VAC	AC21A	25

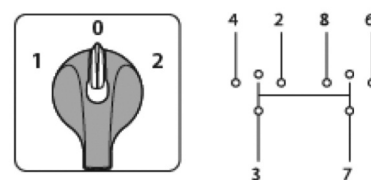

Connection Capacity

Rigid Cable (Cu) (mm ²)	2*4
Flexible Cable (Cu) (mm ²)	2*2,5

14/10/2014

Newlec Helpline: 0845 123 6539