

TRLED Plasterers Lights

2ft + 5ft A Frame and Tripod Range






Features & Applications

- Suitable lighting solution for working in confined spaces.
- Supplied with foldaway stand for ease of storage and transportation.
- Ideal replacement for fluorescent plasterers' lights.
- Supplied with two 16A outlet connections for linkable applications.
- Operating temperature of -15° to $+50^{\circ}$

Dimensions & Weight

Product	Description	Diameter	Width	Height
P1000	2ft Standard A Frame	630mm	77mm	780mm
P1010	2ft Standard Tripod	770mm	77mm	1570mm
P1020	5ft Standard Tripod	770mm	77mm	1990mm

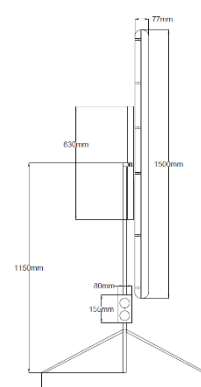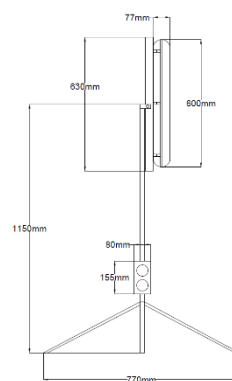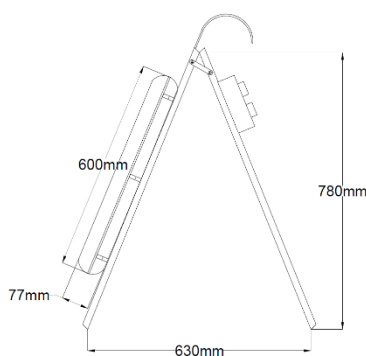

Environmental Friendly Disposal

- The crossed out "Wheeled Bin" symbol on the product refers to the European Directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE)
- This is there to remind you of your obligation that when you dispose of the appliance it must be separately collected
- Contact your local authority for information concerning the correct disposal of your product

Product Datasheet

Technical Specification

Product Code	Electrical Specifications			Photometric Specifications					Material Specifications			Standards, Certificates & Warranty				
	Operating Wattage	Operating Voltage	Power Factor	Colour Temperature	Light Colour	Luminous Flux	Luminous Efficiency	Colour Rendering Index	Construction Materials	Product Colour	Replaceable LED's	Lifespan	IP Protection Rating	IK Rating	Standards	Warranty Period
P1000	20W	100 – 277V	≥0.9	6300K	Daylight	2200Lm	110 Lm/W	RA ≥80	Metal Frame/Polycarbonate Body	Yellow	No	30,000 hrs	IP44	IK08	CE/LVD/RoHS	1 Year
P1010	20W	100 – 277V	≥0.9	6300K	Daylight	2200Lm	110 Lm/W	RA ≥80	Metal Frame/Polycarbonate Body	Yellow	No	30,000 hrs	IP44	IK08	CE/LVD/RoHS	1 Year
P1020	30W	100 – 277V	≥0.9	6300K	Daylight	3300Lm	110 Lm/W	RA ≥80	Metal Frame/Polycarbonate Body	Yellow	No	30,000 hrs	IP44	IK08	CE/LVD/RoHS	1 Year