


PERFECT FOR OFFICE, COMMERCIAL AND INDUSTRIAL APPLICATIONS



*Subject to terms & conditions

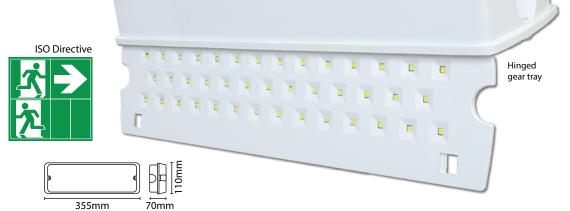

Download IES File from

website

Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating
SEEMLED3M	Self Test Maintained With ISO 7010 Legend Set	7W 6000		235 lm (mains) 150 lm (battery)	30,000 hrs	IP65
EML3MISO	Maintained With ISO 7010 Legend Set					
EMLED3M	Maintained With Signs Directive Legend Set		6000K			
EML3NMISO	Non Maintained With ISO 7010 Legend Set			150 lm		
EMLED3NM	Non Maintained With Signs Directive Legend Set					
BULKFRAME	White Bulkhead Frame					
ISOLGDSET	ISO 7010 Legend Set					
LGDSET	Signs Directive Legend Set					

Viewing distance 20mMAINTAINED VERSIONS:

path designation options

- Facility for remote switching and non-maintained mode
- 235 lm when connected to mains, 150 lm when connected to battery

 Additional legend sets available: ISOLGDSET (ISO 7010 format) / LGDSET (signs directive format) which can be used as additional legend sets or as individual stickers for walls and doors

BULKFRAME:

- Pressed steel construction Spring retaining clips
- · Semi recessed fixing: allows a more discreet installation option
- Hole cut out size: 350mm x 117mm

SEEMLED3M:

- · Automatic testing in accordance with EN 62034
- Fittings / Frame = M.O.M: 1 / O.P.Q: 12
- Legends = M.O.M: 12 / O.P.Q: 12

