


OGP281



Retro-reflective sensor

OGP-HPKG/US/CUBE

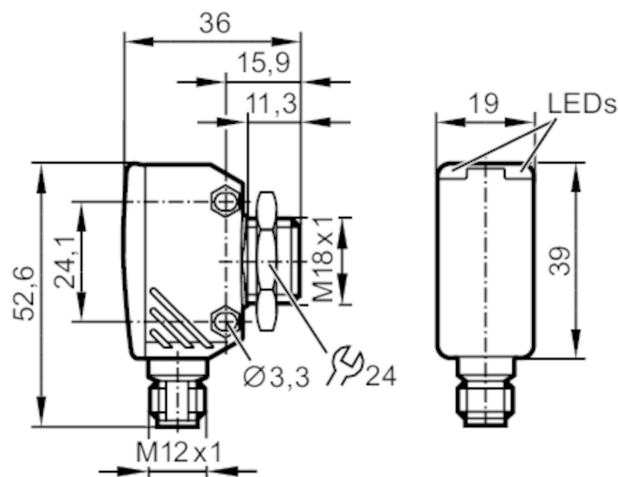

Product characteristics

Type of light	red light
Housing	rectangular

Application

Special feature	polarisation filter
Function principle	Retro-reflective sensor

Electrical data

Operating voltage	[V]	10...30 DC; ("supply class 2" to cULus)
Rated insulation voltage	[V]	32
Current consumption	[mA]	21
Protection class		III
Reverse polarity protection		yes
Max. power-on delay time	[ms]	300
Type of light		red light
Wave length	[Nm]	662

Outputs

Electrical design		PNP
Output function		light-on mode
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	200
Switching frequency DC	[Hz]	1000
Short-circuit protection		yes
Type of short-circuit protection		pulsed



Retro-reflective sensor

OGP-HPKG/US/CUBE

Detection zone		
Range referred to prismatic reflector	[m]	0.1...4; (Prismatic reflector Ø 80 E20005)
Max. light spot diameter	[mm]	160
Light spot dimensions refer to		at maximum range
Polarisation filter available		yes
Interfaces		
Communication interface		IO-Link
Transmission type		COM2 (38,4 kBaud)
IO-Link revision		1.1
SDCI standard		IEC 61131-9
Profiles		Smart Sensor: Device Identification; Device Diagnosis; Teach Channel; Switching Channel
SIO mode		yes
Required master port type		A
Min. process cycle time	[ms]	2.5
IO-Link process data (cyclical)	function	bit length
	device status	4
	binary switching information	1
IO-Link functions (acyclical)		application specific tag; operating hours counter; switching cycles counter
Supported DeviceIDs	Type of operation	DeviceID
	Default	1145
Note		For further information please see the IODD PDF file under "Downloads"
Operating conditions		
Ambient temperature	[°C]	-25...60
Storage temperature	[°C]	-40...60
Protection		IP 65; IP 67
Tests / approvals		
EMC		EN 60947-5-2
MTTF	[years]	905
UL approval	Ta	-25...60 °C
	Enclosure type	Type 1
	voltage supply	Class 2
	File number UL	E174191
Mechanical data		
Weight	[g]	59
Housing		rectangular
Dimensions	[mm]	M18 x 1
Thread designation		M18 x 1
Materials		diecast zinc; PEI
Lens material		PMMA
Lens alignment		side lens
Displays / operating elements		
Display	switching status	1 x LED, yellow
	operation	1 x LED, green



Retro-reflective sensor


OGP-HPKG/US/CUBE

Accessories	
Items supplied	lock nut: 1
Remarks	
Remarks	operating voltage "supply class 2" according to cULus
Pack quantity	1 pcs.
Electrical connection	

Connector: 1 x M12



Connection

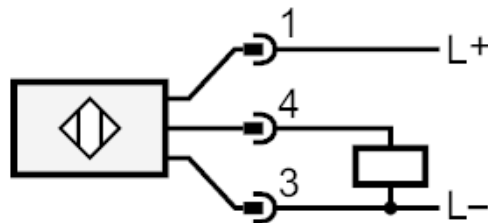



Retro-reflective sensor

OGP-HPKG/US/CUBE

Diagrams and graphs

excess gain graph

