


Product datasheet

Specifications

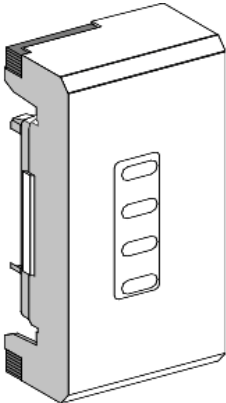

TAPOFF UNIT 16A L N PE FOR BS FUSES

Local distributor code: 2224512 KNB16CG2

Main

| | |
|--------------------------------|--|
| Range of product | Canalis |
| Range compatibility | KN busbar trunking |
| Product or component type | Tap-off unit |
| Busbar trunking compatibility | Canalis KN busbar trunkingplug-in |
| [Ie] rated operational current | 16 A at 35 °C |
| Protection type | fuse isolator: BS88 fuse, size A1 conforming to BS |
| Provided equipment | fuse to be ordered separately cable clamp |
| Mounting mode | Plug-in with phase selection |
| Tap-off unit polarity | L+N+PE |
| Colour | White (RAL 9001) |

Complementary

| | |
|--|---|
| Device application | Low power distribution |
| [Ue] rated operational voltage | 230...500 V depending on protective device |
| [Uimp] rated impulse withstand voltage | 4.6 kV |
| [Ui] rated insulation voltage | 500 V depending on protective device |
| Network frequency | 50/60 Hz |
| Electrical connection | Cable clamp terminal 4 mm² flexible Cable clamp terminal 6 mm² rigid |
| Door/Cover opening side | Front |
| Tap-off unit disconnection mode | By drawing out |
| Standards | IEC 61439-1 IEC 61439-6 |
| Width | 72 mm |
| Depth | 22 mm |
| Height | 172 mm |
| Net weight | 0.18 kg |

Environment

| | |
|-------------------------|------------------------------|
| IP degree of protection | IP55 conforming to IEC 60529 |
| IK degree of protection | IK08 conforming to IEC 62262 |

Packing Units

| | |
|------------------------------|-----------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Weight | 275.0 g |
| Package 1 Height | 7.5 cm |
| Package 1 width | 5 cm |
| Package 1 Length | 13.5 cm |
| Unit Type of Package 2 | BB1 |
| Number of Units in Package 2 | 50 |
| Package 2 Weight | 14.165 kg |
| Package 2 Height | 15.8 cm |
| Package 2 width | 28.5 cm |
| Package 2 Length | 43.5 cm |
| Unit Type of Package 3 | P06 |
| Number of Units in Package 3 | 50 |
| Package 3 Weight | 16.0 kg |
| Package 3 Height | 44 cm |
| Package 3 width | 80 cm |
| Package 3 Length | 60 cm |

Offer Sustainability

| | |
|-----------------------------|---|
| Sustainable offer status | Green Premium product |
| REACH Regulation | REACH Declaration |
| REACH free of SVHC | Yes |
| EU RoHS Directive | Compliant EU RoHS Declaration |
| Toxic heavy metal free | Yes |
| Mercury free | Yes |
| RoHS exemption information | Yes |
| China RoHS Regulation | China RoHS declaration Pro-active China RoHS declaration (out of China RoHS legal scope) |
| Environmental Disclosure | Product Environmental Profile |
| WEEE | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |
| Halogen content performance | Halogen free product |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|