

# Product datasheet

Specifications



## TeSys D contactor - 3P(3 NO) - AC-3 - <= 440 V 95 A - 110 V AC 50/60 Hz coil

Local distributor code: 381821827 LC1D95F7

### Main

|   |   |
|---|---|
| Range                                       | TeSys   |
| Product name                                | TeSys D<br>TeSys Deca   |
| Product or component type                   | Contactor   |
| Device short name                           | LC1D  |
| Contactor application                       | Motor control<br>Resistive load   |
| Utilisation category                        | AC-1<br>AC-4<br>AC-3<br>AC-3e   |
| Poles description                           | 3P  |
| Power pole contact composition              | 3 NO  |
| [Ue] rated operational voltage              | Power circuit: 1000 V AC 25...400 Hz  |
| [Ie] rated operational current              | 95 A (at <60 °C) at <= 440 V AC-3 for power circuit<br>125 A (at <60 °C) at <= 690 V AC-1 for power circuit<br>95 A (at <60 °C) at <= 440 V AC-3e for power circuit   |
| Motor power kW                              | 25 kW at 220...230 V AC 50 Hz (AC-3)<br>45 kW at 380...400 V AC 50 Hz (AC-3)<br>45 kW at 415...440 V AC 50 Hz (AC-3)<br>55 kW at 500 V AC 50 Hz (AC-3)<br>45 kW at 660...690 V AC 50 Hz (AC-3)<br>45 kW at 1000 V AC 50 Hz (AC-3)   |
| Motor power HP (UL / CSA)                   | 7.5 hp at 120 V AC 60 Hz for 1 phase motors<br>15 hp at 230/240 V AC 60 Hz for 1 phase motors<br>30 hp at 200/208 V AC 60 Hz for 3 phases motors<br>30 hp at 230/240 V AC 60 Hz for 3 phases motors<br>60 hp at 460/480 V AC 60 Hz for 3 phases motors<br>60 hp at 575/600 V AC 60 Hz for 3 phases motors |
| Control circuit type                        | AC at 50/60 Hz  |
| [Uc] control circuit voltage                | 110 V AC 50/60 Hz   |
| Auxiliary contact composition               | 1 NO + 1 NC   |
| [Uimp] rated impulse withstand voltage      | 8 kV conforming to IEC 60947  |
| Overvoltage category                        | III   |
| [Ith] conventional free air thermal current | 10 A (at 60 °C) for signalling circuit<br>125 A (at 60 °C) for power circuit  |
| Irms rated making capacity                  | 1100 A at 440 V AC for power circuit conforming to IEC 60947<br>140 A AC for signalling circuit conforming to IEC 60947-5-1<br>250 A DC for signalling circuit conforming to IEC 60947-5-1  |

|   |  |
|---|--|
| <b>Rated breaking capacity</b>                  | 1100 A at 440 V for power circuit conforming to IEC 60947  |
| <b>[Icw] rated short-time withstand current</b> | 1100 A 40 °C - 1 s for power circuit<br>800 A 40 °C - 10 s for power circuit<br>400 A 40 °C - 1 min for power circuit<br>135 A 40 °C - 10 min for power circuit<br>140 A - 100 ms for signalling circuit<br>120 A - 500 ms for signalling circuit<br>100 A - 1 s for signalling circuit  |
| <b>Associated fuse rating</b>                   | 10 A gG for signalling circuit conforming to IEC 60947-5-1<br>200 A gG at <= 690 V coordination type 1 for power circuit<br>160 A gG at <= 690 V coordination type 2 for power circuit   |
| <b>Average impedance</b>                        | 0.8 mOhm - Ith 125 A 50 Hz for power circuit   |
| <b>[Ui] rated insulation voltage</b>            | Power circuit: 1000 V conforming to IEC 60947-4-1<br>Power circuit: 600 V CSA certified<br>Power circuit: 600 V UL certified<br>Signalling circuit: 690 V conforming to IEC 60947-1<br>Signalling circuit: 600 V CSA certified<br>Signalling circuit: 600 V UL certified   |
| <b>Electrical durability</b>                    | 1.2 Mcycles 95 A AC-3<br>1.3 Mcycles 125 A AC-1<br>1.2 Mcycles 95 A AC-3e  |
| <b>Power dissipation per pole</b>               | 12.5 W AC-1<br>7.2 W AC-3<br>7.2 W AC-3e   |
| <b>Front cover</b>                              | With   |
| <b>Mounting support</b>                         | Rail<br>Plate  |
| <b>Standards</b>                                | EN/IEC 60947-1<br>EN/IEC 60947-4-1<br>EN/IEC 60947-5-1<br>UL 60947-4-1<br>UL 60947-5-1<br>CSA C22.2 No 60947-4-1<br>CSA C22.2 No 60947-5-1<br>GB/T 14048.4   |
| <b>Product certifications</b>                   | IECEE CB Scheme<br>UL<br>CSA<br>CCC<br>EAC<br>LROS (Lloyds register of shipping)<br>RINA<br>BV<br>DNV-GL   |
| <b>Connections - terminals</b>                  | Control circuit: screw clamp terminals 2 cable(s) 1...2.5 mm <sup>2</sup> flexible with cable end<br>Control circuit: screw clamp terminals 1 cable(s) 1...2.5 mm <sup>2</sup> flexible with cable end<br>Control circuit: screw clamp terminals 1 cable(s) 1...4 mm <sup>2</sup> flexible without cable end<br>Control circuit: screw clamp terminals 2 cable(s) 1...4 mm <sup>2</sup> flexible without cable end<br>Control circuit: screw clamp terminals 1 cable(s) 1...4 mm <sup>2</sup> solid without cable end<br>Control circuit: screw clamp terminals 2 cable(s) 1...4 mm <sup>2</sup> solid without cable end<br>Power circuit: connector 1 cable(s) 4...50 mm <sup>2</sup> flexible without cable end<br>Power circuit: connector 2 cable(s) 4...25 mm <sup>2</sup> flexible without cable end<br>Power circuit: connector 1 cable(s) 4...50 mm <sup>2</sup> flexible with cable end<br>Power circuit: connector 2 cable(s) 4...16 mm <sup>2</sup> flexible with cable end<br>Power circuit: connector 1 cable(s) 4...50 mm <sup>2</sup> solid without cable end<br>Power circuit: connector 2 cable(s) 4...25 mm <sup>2</sup> solid without cable end |
| <b>Tightening torque</b>                        | Control circuit: 1.2 N.m - on screw clamp terminals - with screwdriver flat Ø 6 mm<br>Control circuit: 1.2 N.m - on screw clamp terminals - with screwdriver Philips No 2<br>Power circuit: 12 N.m - on connector - with screwdriver flat Ø 6 to Ø 8 mm<br>Power circuit: 12 N.m - on connector hexagonal screw head 4 mm<br>Control circuit: 1.2 N.m - on screw clamp terminals - with screwdriver pozidriv No 2  |
| <b>Operating time</b>                           | 20...35 ms closing<br>6...20 ms opening  |
| <b>Safety reliability level</b>                 | B10d = 1.3 Mcycles contactor with nominal load conforming to EN/ISO 13849-1<br>B10d = 20 Mcycles contactor with mechanical load conforming to EN/ISO 13849-1   |
| <b>Mechanical durability</b>                    | 4 Mcycles  |
| <b>Maximum operating rate</b>                   | 3600 cyc/h 60 °C   |

## Complementary

|                                       |   |
|---------------------------------------|---|
| <b>Coil technology</b>                | Without built-in suppressor module              |
| <b>Control circuit voltage limits</b> | 0.8...1.1 Uc (-40...55 °C):operational AC 50 Hz |

0.85...1.1 Uc (-40...55 °C):operational AC 60 Hz  
0.3...0.6 Uc (-40...70 °C):drop-out AC 50/60 Hz  
1...1.1 Uc (55...70 °C):operational AC 50/60 Hz

|  |  |
|--|--|
| <b>Inrush power in VA</b>              | 245 VA 60 Hz cos phi 0.75 (at 20 °C)<br>245 VA 50 Hz cos phi 0.75 (at 20 °C)   |
| <b>Hold-in power consumption in VA</b> | 26 VA 60 Hz cos phi 0.3 (at 20 °C)<br>26 VA 50 Hz cos phi 0.3 (at 20 °C)   |
| <b>Heat dissipation</b>                | 6...10 W at 50/60 Hz   |
| <b>Auxiliary contacts type</b>         | type mechanically linked 1 NO + 1 NC conforming to IEC 60947-5-1<br>type mirror contact 1 NC conforming to IEC 60947-4-1 |
| <b>Signalling circuit frequency</b>    | 25...400 Hz  |
| <b>Minimum switching current</b>       | 5 mA for signalling circuit  |
| <b>Minimum switching voltage</b>       | 17 V for signalling circuit  |
| <b>Non-overlap time</b>                | 1.5 ms on de-energisation between NC and NO contact<br>1.5 ms on energisation between NC and NO contact                  |
| <b>Insulation resistance</b>           | > 10 MΩ for signalling circuit   |

## Environment

|  |   |
|--|---|
| <b>IP degree of protection</b>               | IP20 front face conforming to IEC 60529   |
| <b>Climatic withstand</b>                    | conforming to IACS E10  |
| <b>Protective treatment</b>                  | TH conforming to IEC 60068-2-30   |
| <b>Pollution degree</b>                      | 3   |
| <b>Ambient air temperature for operation</b> | -40...60 °C<br>60...70 °C with derating   |
| <b>Ambient air temperature for storage</b>   | -60...80 °C   |
| <b>Operating altitude</b>                    | 0...3000 m  |
| <b>Fire resistance</b>                       | 850 °C conforming to IEC 60695-2-1  |
| <b>Mechanical robustness</b>                 | Vibrations contactor open: 2 Gn, 5...300 Hz<br>Shocks contactor open: 8 Gn for 11 ms<br>Vibrations contactor closed: 3 Gn, 5...300 Hz<br>Shocks contactor closed: 10 Gn for 11 ms |
| <b>Height</b>                                | 127 mm  |
| <b>Width</b>                                 | 85 mm   |
| <b>Depth</b>                                 | 130 mm  |
| <b>Net weight</b>                            | 1.61 kg   |

## Packing Units

|                                     |          |
|-------------------------------------|----------|
| <b>Unit Type of Package 1</b>       | PCE      |
| <b>Number of Units in Package 1</b> | 1        |
| <b>Package 1 Weight</b>             | 1.554 kg |
| <b>Package 1 Height</b>             | 14 cm    |
| <b>Package 1 width</b>              | 13.5 cm  |
| <b>Package 1 Length</b>             | 10 cm    |
| <b>Unit Type of Package 2</b>       | S02      |
| <b>Number of Units in Package 2</b> | 5        |
| <b>Package 2 Weight</b>             | 8.11 kg  |
| <b>Package 2 Height</b>             | 15 cm    |
| <b>Package 2 width</b>              | 30 cm    |

|                              |          |
|------------------------------|----------|
| Package 2 Length             | 40 cm    |
| Unit Type of Package 3       | P06      |
| Number of Units in Package 3 | 80       |
| Package 3 Weight             | 133.7 kg |
| Package 3 Height             | 77 cm    |
| Package 3 width              | 60 cm    |
| Package 3 Length             | 80 cm    |


## Offer Sustainability

|                            |   |
|----------------------------|---|
| Sustainable offer status   | Green Premium product   |
| REACH Regulation           | <a href="#">REACH Declaration</a>   |
| REACH free of SVHC         | Yes   |
| EU RoHS Directive          | Compliant<br><a href="#">EU RoHS Declaration</a>  |
| Toxic heavy metal free     | Yes   |
| Mercury free               | Yes   |
| RoHS exemption information | <a href="#">Yes</a>   |
| China RoHS Regulation      | <a href="#">China RoHS declaration</a><br>Pro-active China RoHS declaration (out of China RoHS legal scope)                 |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>   |
| WEEE                       | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |
| PVC free                   | Yes   |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

## Dimensions

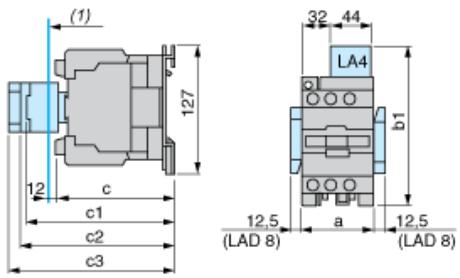

(1) Minimum electrical clearance

| LC1 |                                    | D80 | D95 |
|-----|------------------------------------|-----|-----|
| a   |                                    | 85  | 85  |
| b1  | with LA4 D•2                       | 135 | 135 |
|     | with LA4 DB3 or LAD 4BB3           | 135 | –   |
|     | with LA4 DF, DT                    | 142 | 142 |
|     | with LA4 DM, DW, DL                | 150 | 150 |
| c   | without cover or add-on blocks     | 125 | 125 |
|     | with cover, without add-on blocks  | 130 | 130 |
| c1  | with LAD N (1 contact)             | 150 | 150 |
|     | with LAD N or C (2 or 4 contacts)  | 158 | 158 |
| c2  | with LA6 DK10, LAD 6DK             | 170 | 170 |
| c3  | with LAD T, R, S                   | 178 | 178 |
|     | with LAD T, R, S and sealing cover | 182 | 182 |

Wiring

