


Product datasheet

Specifications

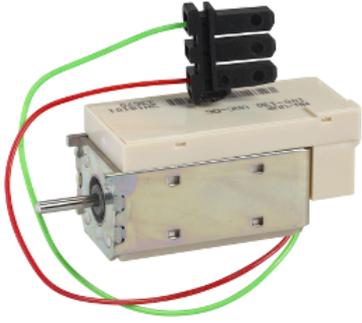

MN undervoltage release,
ComPact NS630b to NS3200 fixed,
MasterPact NT/NW, rated voltage
24/30 VDC, 24 VAC 50/60 Hz

Local distributor code: 383457574 33668

Main

Device short name	MN
Product or component type	Voltage release
Device application	Control
Range compatibility	MasterPact NT MasterPact NW ComPact NS630b...1600 ComPact NS1600b...3200
Voltage release type	Undervoltage release
[Uc] control circuit voltage	24 V AC 50/60 Hz 24...30 V DC

Complementary

Threshold tripping voltage	0.35...0.7 x Un opening 0.85 x Un closing
Supply holding power	4.5 W
Mounting mode	Fixed
Response time	50 ms (Compact NS630b...1600) 50 ms (Compact NS1600b...3200) 55 ms (MasterPact NT) 70 ms (MasterPact NW)
Accessory / separate part category	Spare parts for MasterPact NT Spare parts for MasterPact NW Spare parts for Compact NS1600b...3200 Spare parts for Compact NS630b...1600

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	154.0 g
Package 1 Height	3.5 cm
Package 1 width	6 cm
Package 1 Length	8.2 cm
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Weight	1.6 kg

Package 2 Height	9 cm
Package 2 width	13 cm
Package 2 Length	18.5 cm
Unit Type of Package 3	S03
Number of Units in Package 3	20
Package 3 Weight	3.6 kg
Package 3 Height	30 cm
Package 3 width	30 cm
Package 3 Length	40 cm

Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information

Contractual warranty

Warranty	18 months
----------	-----------