
Main

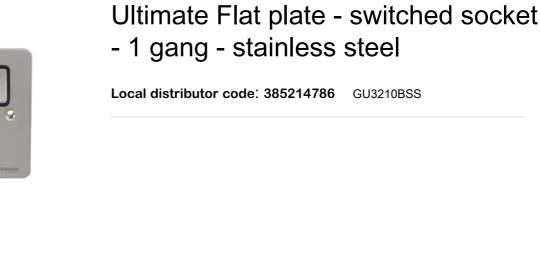

Range **Device application** Power supply Flat plate Aesthetic name **Product or component type** Switched socket Rated current 13 A at 230 V AC 50 Hz Fixing mode By screws M3.5 x 30 mm Stainless steel **Colour tint**

Ultimate

Complementary	
Device presentation	Complete product
Outlet poles configuration	1P
Outlet standard description	3 pins
Outlet standard	British
Actuator	Rocker
Number of gangs	1 gang
Earth circuit	Standard earth
Pilot light	Without neon indicator
Device mounting	Wall mounted
Connections - terminals	Screw terminal
Material	Stainless steel
Quantity per set	Set of 1
Height	88 mm
Width	88 mm
Depth	30 mm
Socket number	1

Environment	
IP degree of protection	IP20

Life Is On Schneider

Horizontal

Mounting mode

Standards	BS
Packing Units	
Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	167.6 g
Package 1 Height	4 cm
Package 1 width	9.4 cm
Package 1 Length	9.6 cm
Unit Type of Package 2	CAR
Number of Units in Package 2	100
Package 2 Weight	17.363 kg
Package 2 Height	21.5 cm
Package 2 width	42.5 cm
Package 2 Length	50 cm
Unit Type of Package 3	PAM
Number of Units in Package 3	1600
Package 3 Weight	297.81 kg
Package 3 Height	102.5 cm
Package 3 width	100 cm
Package 3 Length	120 cm
Offer Sustainability	
REACh Regulation	REACh Declaration

RoHS exemption information

China RoHS Regulation

EU RoHS Directive

Mercury free

Warranty	18 months
----------	-----------

Compliant

Yes

Yes

EU RoHS Declaration

China RoHS declaration