

# Product datasheet

Specifications



pre-wired connectors XZ - elbowed  
female - M12 - 3 pins - cable PUR  
5m

Local distributor code: 388814646    XZCP1340L5

## Main

|                                    |                                  |
|------------------------------------|----------------------------------|
| Range of product                   | Telemecanique Cabling components |
| Accessory / separate part category | Cabling accessory                |
| Accessory / separate part type     | Pre-wired connectors             |
| Series name                        | General purpose                  |

## Complementary

|                                |                                      |
|--------------------------------|--------------------------------------|
| Electrical connection          | Elbowed female connector M12, 3 pins |
| Cable connector fixing         | Screw-on                             |
| Collar material                | Metal                                |
| Status LED                     | 2 PNP LEDs                           |
| Cable length                   | 5 m                                  |
| Cable outer diameter           | 5.2 mm                               |
| Cable composition              | 3 x 0.34 mm <sup>2</sup>             |
| Wire insulation material       | PUR                                  |
| [Ue] rated operational voltage | 10...30 V DC                         |
| [In] rated current             | 4 A                                  |
| Contact resistance             | 5000 µOhm                            |
| Minimum insulating resistance  | 1 GΩ                                 |
| Net weight                     | 0.18 kg                              |

## Environment

|                                       |                                          |
|---------------------------------------|------------------------------------------|
| IP degree of protection               | IP65<br>IP67<br>IP69K                    |
| Product certifications                | cULus                                    |
| Ambient air temperature for operation | -40...80 °C static<br>-5...80 °C flexing |
| Ambient air temperature for storage   | -40...80 °C                              |

Packing Units

|                              |           |
|------------------------------|-----------|
| Unit Type of Package 1       | PCE       |
| Number of Units in Package 1 | 1         |
| Package 1 Weight             | 130.0 g   |
| Package 1 Height             | 3.7 cm    |
| Package 1 width              | 23.7 cm   |
| Package 1 Length             | 19 cm     |
| Unit Type of Package 2       | S02       |
| Number of Units in Package 2 | 20        |
| Package 2 Weight             | 2.958 kg  |
| Package 2 Height             | 15 cm     |
| Package 2 width              | 30 cm     |
| Package 2 Length             | 40 cm     |
| Unit Type of Package 3       | P06       |
| Number of Units in Package 3 | 320       |
| Package 3 Weight             | 55.828 kg |
| Package 3 Height             | 77 cm     |
| Package 3 width              | 80 cm     |
| Package 3 Length             | 60 cm     |


Offer Sustainability

|                            |                                                                                                   |
|----------------------------|---------------------------------------------------------------------------------------------------|
| Sustainable offer status   | Green Premium product                                                                             |
| REACH Regulation           | <a href="#">REACH Declaration</a>                                                                 |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope)<br><a href="#">EU RoHS Declaration</a> |
| Mercury free               | Yes                                                                                               |
| RoHS exemption information | <a href="#">Yes</a>                                                                               |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>                                                     |
| Circularity Profile        | <a href="#">End of Life Information</a>                                                           |

Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|


Dimensions

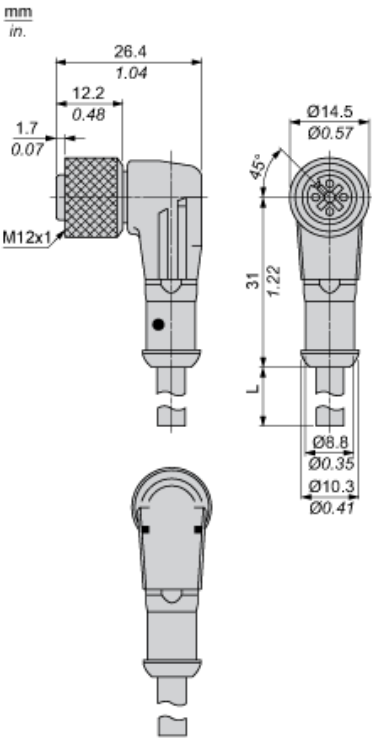

L :      Lenght of cable

Connections and Schemes

Connector



- BN :


Black
- BK :

Black
- BU :

Blue

Connections and Schemes

LED Connection



- BN : Brown
- BK : Black
- BU : Blue
- GN : Green
- YW : Yellow
- (1) : Signal