


Product datasheet

Specifications

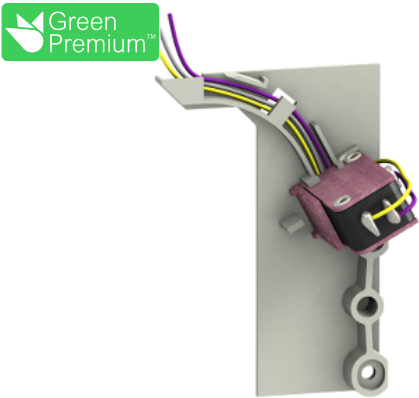

standard early break contact,
ComPact NSX400 to NSX630,
rotary handle position CAO, 1
changeover contact type

Local distributor code: 391357213 LV432605

Main

Range of product	ComPact NSX400...630 ComPact NSX400...630 DC
Range	ComPact
Device short name	Early-break contact
Product or component type	Auxiliary contact
Device application	Control
Range compatibility	ComPact NSX400 ComPact NSX630 Compact NSX400 DC Compact NSX630 DC PowerPact L

Complementary

Auxiliary contacts type	Standard
Auxiliary contacts operation	Early-break
Mounting mode	Drawout
[I _{th}] conventional free air thermal current	6 A
[I _e] rated operational current	AC-12: 6 A at 110 V AC 50/60 Hz AC-12: 6 A at 220/240 V AC 50/60 Hz AC-12: 6 A at 24 V AC 50/60 Hz AC-12: 6 A at 380/440 V AC 50/60 Hz AC-12: 6 A at 48 V AC 50/60 Hz AC-12: 6 A at 480 V AC 50/60 Hz AC-12: 6 A at 660/690 V AC 50/60 Hz AC-15: 0.1 A at 660/690 V AC 50/60 Hz AC-15: 1.5 A at 480 V AC 50/60 Hz AC-15: 2 A at 380/440 V AC 50/60 Hz AC-15: 4 A at 220/240 V AC 50/60 Hz AC-15: 5 A at 110 V AC 50/60 Hz AC-15: 6 A at 24 V AC 50/60 Hz AC-15: 6 A at 48 V AC 50/60 Hz DC-12: 0.3 A at 250 V DC DC-12: 0.6 A at 110 V DC DC-12: 2.5 A at 48 V DC DC-12: 6 A at 24 V DC DC-14: 0.03 A at 250 V DC DC-14: 0.05 A at 110 V DC DC-14: 0.2 A at 48 V DC DC-14: 1 A at 24 V DC
Minimum load	100 mA at 24 V DC

Packing Units

Unit Type of Package 1	PCE
------------------------	-----

Number of Units in Package 1	1
Package 1 Weight	48.0 g
Package 1 Height	4 cm
Package 1 width	6.5 cm
Package 1 Length	8.8 cm
Unit Type of Package 2	S03
Number of Units in Package 2	108
Package 2 Weight	5.249 kg
Package 2 Height	30 cm
Package 2 width	30 cm
Package 2 Length	40 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Pro-active China RoHS declaration (out of China RoHS legal scope)
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
PVC free	Yes

Contractual warranty

Warranty	18 months
----------	-----------