


Product datasheet

Specifications

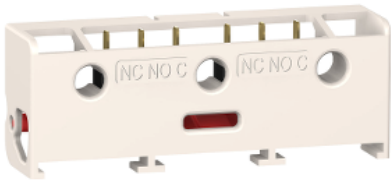

TeSys fuse-disconnector - signalling contact - 1 NC - 5A - instantaneous

Local distributor code: 393393932 DF22AM1

Main

Range	TeSys
Device short name	DF22
Product or component type	Auxiliary contact block
Auxiliary contacts operation	Instantaneous
Pole contact composition	1 NC
Connections - terminals	Faston connector

Complementary

Range compatibility	TeSys DF
[Ui] rated insulation voltage	250 VAC
[Ue] rated operational voltage	24...240 V AC AC-15 24...240 V DC DC-13
[Ith] conventional free air thermal current	5 A
Minimum switching current	30 mA
Minimum switching voltage	10 V
Net weight	0.032 kg

Environment

Ambient air temperature for operation	-20...60 °C
Ambient air temperature for storage	-40...80 °C

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	26.0 g
Package 1 Height	3.2 cm
Package 1 width	10.5 cm
Package 1 Length	2 cm
Unit Type of Package 2	S03

Number of Units in Package 2	100
Package 2 Weight	3.124 kg
Package 2 Height	30 cm
Package 2 width	30 cm
Package 2 Length	40 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Pro-active China RoHS declaration (out of China RoHS legal scope)
Environmental Disclosure	Product Environmental Profile
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Contractual warranty

Warranty	18 months
----------	-----------