

# Product datasheet

Specifications



yellow empty enclosure lid with light grey base - 3 cut-outs

Local distributor code: 393523087    XALK03

## Main

|                             |                                                                                                                                    |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| Range of product            | Harmony XALK                                                                                                                       |
| Product or component type   | Empty control station                                                                                                              |
| Device short name           | XALK                                                                                                                               |
| Product destination         | For XB5 Ø 22 mm control and signalling units                                                                                       |
| Control station application | Emergency stop function<br>Emergency switching off function                                                                        |
| Number of cut-out           | 3 cut-outs                                                                                                                         |
| Colour of base of enclosure | Light grey (RAL 7035)                                                                                                              |
| Colour of cover             | Yellow (RAL 1021)                                                                                                                  |
| Material                    | Polycarbonate                                                                                                                      |
| Cable entry                 | 2 knock-outs for cable entry, clamping capacity: 14 mm<br>2 knock-outs for Pg 13 cable gland and ISO M20, clamping capacity: 12 mm |
| IP degree of protection     | IP66 conforming to IEC 60529<br>IP67<br>IP69<br>IP69K                                                                              |

## Complementary

|                                    |                                       |
|------------------------------------|---------------------------------------|
| Assembly style                     | For customer assembly                 |
| Number of horizontal rows          | 1                                     |
| Number of vertical rows            | 3                                     |
| Net weight                         | 0.238 kg                              |
| Resistance to high pressure washer | 7000000 Pa at 55 °C, distance : 0.1 m |
| Mounting of block                  | Front mounting<br>Rear mounting       |
| Main group                         | 3 cut-outs                            |
| Group of product                   | Standard yellow                       |

## Environment

|                                     |             |
|-------------------------------------|-------------|
| Protective treatment                | TH          |
| Ambient air temperature for storage | -40...70 °C |

|                                       |                                                                                                                                         |
|---------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| Ambient air temperature for operation | -40...70 °C                                                                                                                             |
| Overvoltage category                  | Class II conforming to IEC 60536                                                                                                        |
| NEMA degree of protection             | NEMA 13<br>NEMA 4X                                                                                                                      |
| IK degree of protection               | IK03 conforming to EN 50102                                                                                                             |
| Standards                             | JIS C8201-5-1<br>EN/IEC 60947-5-1<br>CSA C22.2 No 14<br>UL 508<br>EN/IEC 60947-1<br>EN/IEC 60947-5-4<br>EN/IEC 60947-5-5<br>JIS C8201-1 |

## Packing Units

|                              |          |
|------------------------------|----------|
| Unit Type of Package 1       | PCE      |
| Number of Units in Package 1 | 1        |
| Package 1 Weight             | 226.0 g  |
| Package 1 Height             | 7.5 cm   |
| Package 1 width              | 7 cm     |
| Package 1 Length             | 13.7 cm  |
| Unit Type of Package 2       | S03      |
| Number of Units in Package 2 | 30       |
| Package 2 Weight             | 7.277 kg |
| Package 2 Height             | 30 cm    |
| Package 2 width              | 30 cm    |
| Package 2 Length             | 40 cm    |


## Offer Sustainability

|                            |                                                                                                   |
|----------------------------|---------------------------------------------------------------------------------------------------|
| Sustainable offer status   | Green Premium product                                                                             |
| REACH Regulation           | <a href="#">REACH Declaration</a>                                                                 |
| REACH free of SVHC         | Yes                                                                                               |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope)<br><a href="#">EU RoHS Declaration</a> |
| Toxic heavy metal free     | Yes                                                                                               |
| Mercury free               | Yes                                                                                               |
| RoHS exemption information | <a href="#">Yes</a>                                                                               |
| China RoHS Regulation      | <a href="#">China RoHS declaration</a>                                                            |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>                                                     |
| Circularity Profile        | <a href="#">End of Life Information</a>                                                           |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Dimensions

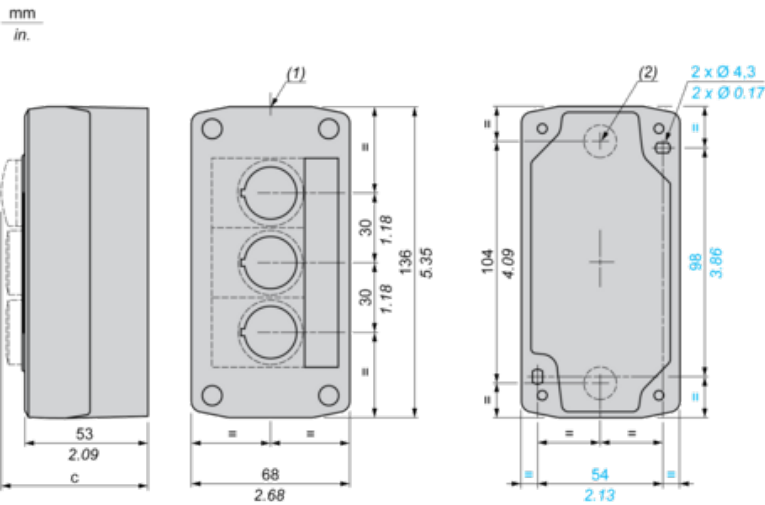

- (1) 2 knock-outs for Pg 13.5 cable gland, maximum capacity 12 mm/0.47 in.  
(2) Knock-out for cable entry, maximum capacity 14 mm/0.55 in.

| Control station fitted with: | c in mm | c in in. |
|------------------------------|---------|----------|
| Flush pushbutton             | 62      | 2.44     |
| Illuminated pushbutton       | 64      | 2.52     |
| Pilot light                  | 65.5    | 2.58     |
| Projecting pushbutton        | 66      | 2.60     |
| Selector switch              | 80      | 3.15     |
| Key switch                   | 105.5   | 4.15     |