

# Product datasheet

Specifications



inductive sensor XS1 M18 - L50mm  
- brass - Sn8mm - 12..24VDC - M12

Local distributor code: 393606593 XS118B3PAM12

## Main

Range of product	Telemecanique Inductive proximity sensors XS
Series name	General purpose
Sensor type	Inductive proximity sensor
Device application	Mobile equipment
Sensor name	XS1
Sensor design	Cylindrical M18
Size	50 mm
Body type	Fixed
Detector flush mounting acceptance	Flush mountable
Material	Metal
Type of output signal	Discrete
Wiring technique	3-wire
[Sn] nominal sensing distance	8 mm
Discrete output function	1 NO
Output circuit type	DC
Discrete output type	PNP
Electrical connection	Male connector M12, 4 pins
[Us] rated supply voltage	12...24 V DC with reverse polarity protection
Switching capacity in mA	<= 200 mA with overload and short-circuit protection
IP degree of protection	IP65 conforming to IEC 60529 IP67 conforming to IEC 60529

## Complementary

Thread type	M18 x 1
Detection face	Frontal
Front material	PPS
Enclosure material	Nickel plated brass
Operating zone	0...6.4 mm
Differential travel	1...15% of Sr

<b>Status LED</b>	Output state: 1 LED (yellow)
<b>Supply voltage limits</b>	10...36 V DC
<b>Switching frequency</b>	<= 1000 Hz
<b>Maximum voltage drop</b>	<2 V (closed)
<b>Current consumption</b>	<= 10 mA no-load
<b>Maximum delay first up</b>	10 ms
<b>Maximum delay response</b>	0.3 ms
<b>Maximum delay recovery</b>	0.7 ms
<b>Marking</b>	CE
<b>Threaded length</b>	28 mm
<b>Length</b>	50 mm

## Environment

<b>Product certifications</b>	CSA UL E2
<b>Ambient air temperature for operation</b>	-25...70 °C
<b>Ambient air temperature for storage</b>	-40...85 °C
<b>Vibration resistance</b>	25 gn amplitude = +/- 2 mm (f = 10...55 Hz) conforming to IEC 60068-2-6
<b>Shock resistance</b>	50 gn for 11 ms conforming to IEC 60068-2-27

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Weight</b>	58.0 g
<b>Package 1 Height</b>	6.5 cm
<b>Package 1 width</b>	4.2 cm
<b>Package 1 Length</b>	9.5 cm
<b>Unit Type of Package 2</b>	S01
<b>Number of Units in Package 2</b>	1
<b>Package 2 Weight</b>	225.0 g
<b>Package 2 Height</b>	15 cm
<b>Package 2 width</b>	15 cm
<b>Package 2 Length</b>	40 cm
<b>Unit Type of Package 3</b>	S02
<b>Number of Units in Package 3</b>	22
<b>Package 3 Weight</b>	1.731 kg
<b>Package 3 Height</b>	15 cm
<b>Package 3 width</b>	30 cm
<b>Package 3 Length</b>	40 cm

## Offer Sustainability


<b>Sustainable offer status</b>	Green Premium product
---------------------------------	-----------------------

<b>REACh Regulation</b>	<a href="#">REACh Declaration</a>
<b>EU RoHS Directive</b>	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
<b>Mercury free</b>	Yes
<b>RoHS exemption information</b>	<a href="#">Yes</a>
<b>Environmental Disclosure</b>	<a href="#">Product Environmental Profile</a>
<b>Circularity Profile</b>	<a href="#">End of Life Information</a>

## **Contractual warranty**

<b>Warranty</b>	18 months
-----------------	-----------

### Dimensions

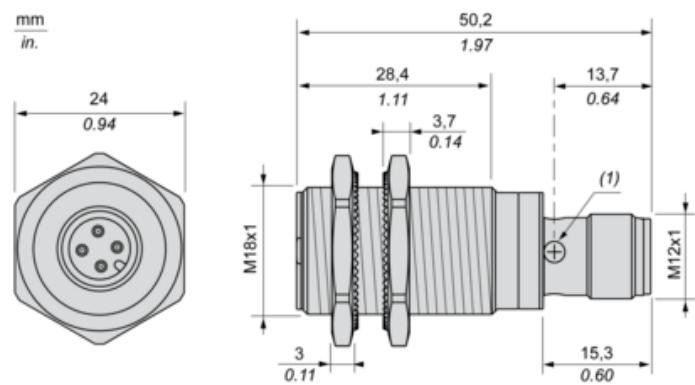


(1) : LED

**Minimum Mounting Distances**


---

Side by side

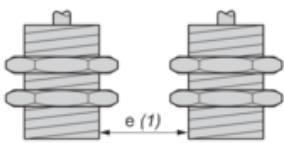


$e (1) \geq 16 \text{ mm/0.63 in.}$

Face to face

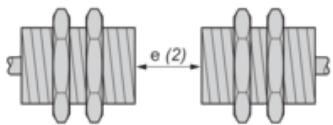

$e (2) \geq 100 \text{ mm/3.94 in.}$


Facing a metal object

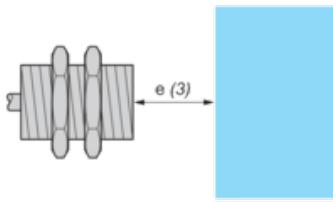

$e (3) \geq 25 \text{ mm/0.98 in}$

Wiring Schemes

M12 connector



PNP

