


Product datasheet

Specifications

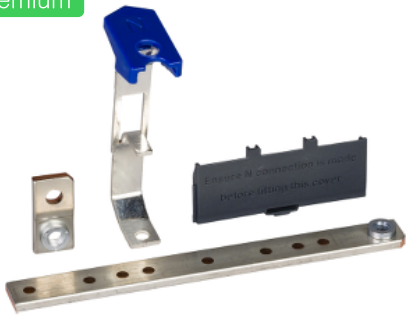

Isobar B - neutral bar - 1N - for distribution board - 4 ways

Local distributor code: 396793830 SEA9NB4

Main

Product or component type	Neutral bar
Enclosure type	Standard
Door type	Overall

Complementary

[Ie] rated operational current	250 A at 400/415 V AC
Breaking capacity	25 kA
Poles description	3P + N
Protection device name	IC60H
Product destination	Distribution board
Number of ways	4 ways outgoer
Provided equipment	Neutral bar Busbar link 4 Cover
Enclosure material	Steel
Surface treatment	Epoxy
Surface finish	Powder paint
IP degree of protection	IP2x internal conforming to BS EN 60529 IP3x external conforming to BS EN 60529
IK degree of protection	IK05 conforming to BS EN 60529
Colour	White (RAL 9001)
Height	484 mm
Depth	138 mm

Environment

Ambient air temperature for operation	-35...70 °C
Ambient air temperature for storage	-40...80 °C

Packing Units

Unit Type of Package 1	PCE
------------------------	-----

Number of Units in Package 1	1
Package 1 Weight	250.2 g
Package 1 Height	8.3 cm
Package 1 width	8 cm
Package 1 Length	3.8 cm
Unit Type of Package 2	PAM
Number of Units in Package 2	175
Package 2 Weight	100.0 kg
Package 2 Height	112 cm
Package 2 width	100 cm
Package 2 Length	120 cm
Package 3 Height	112 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information
Environmental Disclosure	Product Environmental Profile
Halogen content performance	Halogen free plastic parts product

Contractual warranty

Warranty	18 months
----------	-----------