


Product datasheet

Specifications

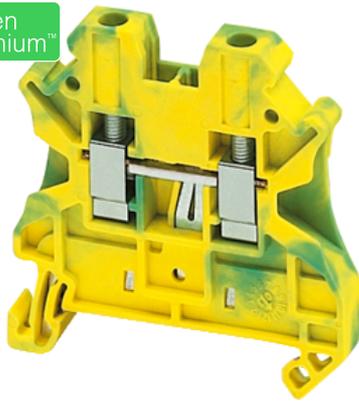

SCREW TERMINAL, PROTECTIVE EARTH, 2 POINTS, 4MM², GREEN-YELLOW

Local distributor code: 397144637 NSYTRV42PE

Main

| | |
|---------------------------|-------------------|
| Range | Lineryg |
| Product name | Lineryg TR |
| Product or component type | Terminal block |
| Device short name | TRV |
| Terminal block type | Protective earth |
| Terminal block level | 1 |
| Mounting mode | Clip-on |
| Nominal cross section | 4 mm ² |
| Length | 47.7 mm |
| Colour | Green-yellow |
| Quantity per set | Set of 50 |

Complementary

| | |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| Width | 6.2 mm |
| Height | 47.5 mm |
| Connections - terminals | 1 x screw terminal: upstream 1 x screw terminal: downstream |
| Number of connections | 2 |
| Connection position | Sideways |
| Number of measurement input | 2 |
| Cable cross section | 0.14...6 mm ² , solid 0.2...4 mm ² , flexible with cable end 0.14...6 mm ² , flexible without cable end |
| Tightening torque | 0.6...0.8 N.m |
| Wire stripping length | 9 mm |
| Tool type | Connection: screwdriver Disconnection: screwdriver |
| Material | Polyamide 6/6: insulating case |
| Dielectric loss | 0.01 at 1 MHz conforming to IEC 60250 0.01 at 1 MHz conforming to VDE 0303-T4 |
| Dielectric constant | 3.7 at 1 MHz |
| Resistivity | 10000 MΩ.m conforming to IEC 60093 |

10000 MΩ.m conforming to VDE 0303-T30

| | |
|------------------------------|---------------------------------------------------------------------------------------------|
| Surface resistance | 1000 GΩ conforming to IEC 60093 1000 GΩ conforming to VDE 0303-T30 |
| Creep resistance | 500 CTI (> 400 kB) conforming to IEC 60093 500 CTI (> 400 kB) conforming to VDE 0303-T30 |
| Flame retardance | V0, thickness 0.8 mm conforming to UL 94 |
| Net weight | 13.38 g |
| Range compatibility | Prisma G Prisma P Prisma PH Prisma Pack Spacial Kaedra Pragma TeSys |
| Product compatibility | Spacial enclosures |

Environment

| | |
|----------------------------------------------|-----------------------------------------------------------------------------------|
| Product certifications | VDE ATEX LR CSA GL DNV EAC IEC-Ex cURus |
| Dielectric strength | 1000 V conforming to IEC 60243-1 |
| Ambient air temperature for operation | -40...130 °C conforming to IEC 60216-1 -40...130 °C conforming to VDE 0304-T21 |

Packing Units

| | |
|-------------------------------------|------------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Weight | 13.0 g |
| Package 1 Height | 5 cm |
| Package 1 width | 25.2 cm |
| Package 1 Length | 6.8 cm |
| Unit Type of Package 2 | P06 |
| Number of Units in Package 2 | 10400 |
| Package 2 Weight | 151.944 kg |
| Package 2 Height | 73.5 cm |
| Package 2 width | 80 cm |
| Package 2 Length | 60 cm |
| Unit Type of Package 3 | BB1 |
| Number of Units in Package 3 | 50 |
| Package 3 Weight | 668.0 g |
| Package 3 Height | 5 cm |
| Package 3 width | 25.2 cm |
| Package 3 Length | 6.8 cm |

Offer Sustainability

| | |
|---------------------------------|-----------------------------------|
| Sustainable offer status | Green Premium product |
| REACH Regulation | REACH Declaration |

| | |
|------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive | Compliant EU RoHS Declaration |
| Mercury free | Yes |
| RoHS exemption information | Yes |
| China RoHS Regulation | China RoHS declaration Product out of China RoHS scope. Substance declaration for your information |
| Environmental Disclosure | Product Environmental Profile |
| WEEE | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |
| Halogen content performance | Halogen free plastic parts product |
| Contractual warranty | |
| Warranty | 18 months |