


Product datasheet

Specifications

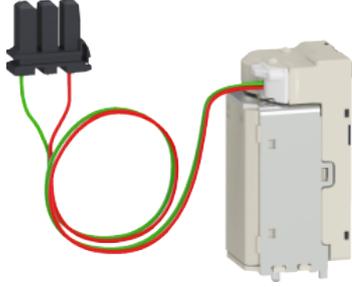

XF or MX voltage release, standard, Masterpact MTZ1/2/3, 200/250 VAC 50/60 Hz, 200/250 VDC, spare part

LV833662SP

Main

Range	Masterpact
Product or component type	Voltage release
Device application	Control
Range compatibility	MasterPact MTZ2 circuit-breaker MasterPact MTZ3 circuit-breaker MasterPact MTZ1 circuit-breaker
Voltage release type	Closing coil Opening coil

Complementary

[Un] voltage power supply	200...250 V AC 50/60 Hz 200...250 V DC
Threshold tripping voltage	0.7...1.1 Un on opening 0.85...1.1 Un on closing
Holding power consumption	4.5 W
Circuit breaker mounting mode	Fixed/drawout
Maximum response time	60 ms on opening for MasterPact MTZ1 60 ms on opening for MasterPact MTZ2 60 ms on opening for MasterPact MTZ3 65 ms on closing for MasterPact MTZ1 80 ms on closing for MasterPact MTZ2 90 ms on closing for MasterPact MTZ3
Provided equipment	1 instruction sheet
Offer type	Spare part

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	235.0 g
Package 1 Height	3.5 cm
Package 1 width	6.2 cm
Package 1 Length	8.5 cm
Unit Type of Package 2	S04
Number of Units in Package 2	20
Package 2 Weight	4.917 kg

Package 2 Height	30 cm
Package 2 width	40 cm
Package 2 Length	60 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information

Contractual warranty

Warranty	18 months
----------	-----------