


Product datasheet

Specifications

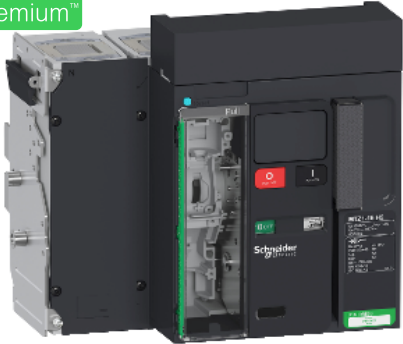

Circuit breaker Masterpact MTZ1 16H2 - 1600 A - 4P drawout - w/o Micrologic

LV847247

Main

Range	Masterpact
Product name	MasterPact MTZ1
Device short name	MTZ1 16 H2
Product or component type	Circuit breaker
Device application	Protection
Poles description	4P
Neutral position	Left
Network type	AC
Network frequency	50/60 Hz
Breaking capacity code	H2
Suitability for isolation	Yes conforming to IEC 60947-2
Selectivity category	Category B

Complementary

Control type	Push-button
Mounting mode	Drawout
Mounting support	Base plate Rails
[In] rated current	1600 A at 40 °C
[Ui] rated insulation voltage	1000 V AC 50/60 Hz conforming to IEC 60947-2
[Uimp] rated impulse withstand voltage	12 kV conforming to IEC 60947-2
[Icm] rated short-circuit making capacity	105 kA 220/415 V AC at 50/60 Hz 105 kA 440 V AC at 50/60 Hz 88 kA 500/525 V AC at 50/60 Hz 88 kA 660/690 V AC at 50/60 Hz
[Ue] rated operational voltage	690 V AC 50/60 Hz conforming to IEC 60947-2
Circuit breaker CT rating	1600 A 630 A 400 A 800 A 1250 A 1000 A
Performance level	50 kA Icu at 220/415 V AC 50/60 Hz conforming to IEC 60947-2 50 kA Icu at 440 V AC 50/60 Hz conforming to IEC 60947-2 42 kA Icu at 500/525 V AC 50/60 Hz conforming to IEC 60947-2

	42 kA Icu at 660/690 V AC 50/60 Hz conforming to IEC 60947-2
[Ics] rated service breaking capacity	50 kA at 220/415 V AC 50/60 Hz conforming to IEC 60947-2 50 kA at 440 V AC 50/60 Hz conforming to IEC 60947-2 42 kA at 500/525 V AC 50/60 Hz conforming to IEC 60947-2 42 kA at 660/690 V AC 50/60 Hz conforming to IEC 60947-2
Mechanical durability	12500 cycles with periodic preventive maintenance conforming to IEC 60947-2
Electrical durability	3000 cycles 690 V AC 50/60 Hz conforming to IEC 60947-2 6000 cycles 440 V AC 50/60 Hz conforming to IEC 60947-2 AC-23A: 3000 cycles 690 V AC 50/60 Hz conforming to IEC 60947-3 AC-23A: 6000 cycles 440 V AC 50/60 Hz conforming to IEC 60947-3 AC-3: 6000 cycles 440 V AC 50/60 Hz conforming to IEC 60947-3
Connection pitch	70 mm
[Icw] rated short-time withstand current	42 kA 0.5 s conforming to IEC 60947-2 42 kA 1 s conforming to IEC 60947-2 24 kA 3 s conforming to IEC 60947-2
Integral instant protection	81...99 kA
Maximum breaking time	25 ms
Maximum closing response time	50 ms
Height	Drawout circuit breaker without chassis: 259.5 mm Drawout circuit breaker with chassis: 322 mm
Width	Drawout circuit breaker without chassis: 306.5 mm Drawout circuit breaker with chassis: 358 mm
Depth	Drawout circuit breaker without chassis: 207.5 mm Drawout circuit breaker with chassis: 266 mm

Environment

Standards	IEC 60364-8-1 IEC 60947-2
Product certifications	ASEFA LCIE
Pollution degree	3 conforming to IEC 60947-1
Ambient air temperature for operation	-25...70 °C
Ambient air temperature for storage	-40...85 °C

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	17.828 kg
Package 1 Height	40 cm
Package 1 width	40 cm
Package 1 Length	30 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information
Environmental Disclosure	Product Environmental Profile

Contractual warranty

Warranty	18 months
----------	-----------