


Product datasheet

Specifications

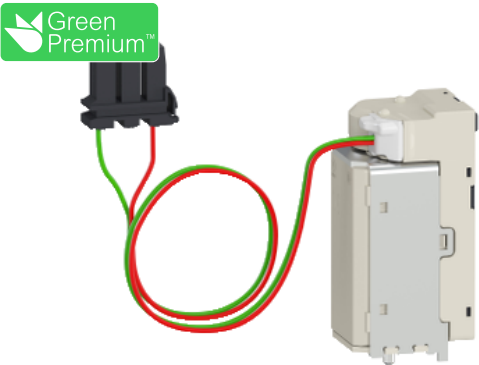

XF closing voltage release,
standard, Masterpact MTZ1/2/3
fixed, 200/250 VAC 50/60 Hz,
200/250 VDC

LV847353

Main

Range	Masterpact
Device short name	XF
Product or component type	Voltage release
Device application	Control
Range compatibility	MasterPact MTZ2 circuit-breaker MasterPact MTZ3 circuit-breaker MasterPact MTZ1 circuit-breaker
Voltage release type	Closing coil

Complementary

Control type	Standard
[Un] voltage power supply	200...250 V AC 50/60 Hz 200...250 V DC
Threshold tripping voltage	0.85...1.1 Un on closing
Holding power consumption	4.5 W
Circuit breaker mounting mode	Fixed
Maximum response time	65 ms on closing for MasterPact MTZ1 80 ms on closing for MasterPact MTZ2 90 ms on closing for MasterPact MTZ3

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	1.162 kg
Package 1 Height	3.5 cm
Package 1 width	6.5 cm
Package 1 Length	8.5 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration

Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information

Contractual warranty

Warranty	18 months
----------	-----------