


Product datasheet

Specifications

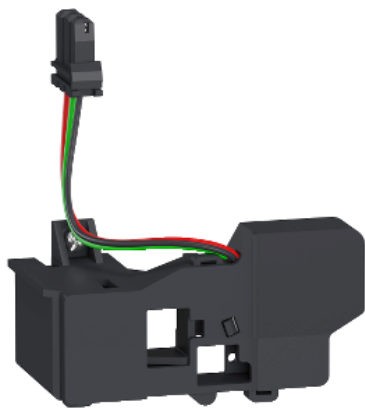

Additional SDE fault-trip indication contact - 6 A/240 VAC - MTZ2/MTZ3 drawout

LV848475

Main

Range	Masterpact
Device short name	SDE
Device application	Control
Range compatibility	MasterPact MTZ2 circuit breaker MasterPact MTZ3 circuit breaker

Complementary

Auxiliary contacts type	Standard
Signal contacts composition	1 NO/NC
Mounting mode	Drawout
[I _{th}] conventional free air thermal current	5 A
Breaking capacity	6 A AC-12 240/380 V AC 50/60 Hz 2 A AC-12 480 V AC 50/60 Hz 3 A DC-12 24/48 V DC 0.3 A DC-12 125 V DC 0.15 A DC-12 250 V DC
Minimum load	100 mA at 24 V

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	70.0 g
Package 1 Height	3.5 cm
Package 1 width	4 cm
Package 1 Length	7.3 cm

Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration

Contractual warranty

Warranty	18 months
----------	-----------