


# Product datasheet

Specifications

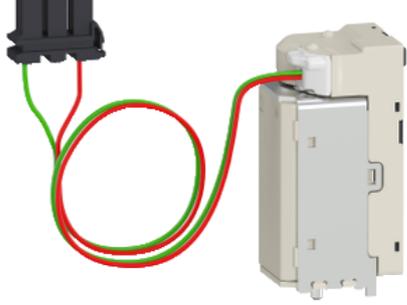

## MX opening voltage release, standard, Masterpact MTZ2/3 drawout, 24 VAC 50/60 Hz, 24/30 VDC

LV848491

### Main

Range	Masterpact
Device short name	MX
Product or component type	Voltage release
Device application	Control
Range compatibility	MasterPact MTZ2 circuit-breaker MasterPact MTZ3 circuit-breaker
Voltage release type	Opening coil

### Complementary

Control type	Standard
[Un] voltage power supply	24...30 V DC 24 V AC 50/60 Hz
Threshold tripping voltage	0.7...1.1 Un on opening
Holding power consumption	4.5 W
Circuit breaker mounting mode	Drawout
Maximum response time	60 ms on opening for MasterPact MTZ2 60 ms on opening for MasterPact MTZ3

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	1.166 kg
Package 1 Height	3.4 cm
Package 1 width	6.1 cm
Package 1 Length	8.3 cm

### Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Mercury free	Yes

<b>RoHS exemption information</b>	<a href="#">Yes</a>
<b>China RoHS Regulation</b>	<a href="#">China RoHS declaration</a> Product out of China RoHS scope. Substance declaration for your information
<b>Environmental Disclosure</b>	<a href="#">Product Environmental Profile</a>
<b>Circularity Profile</b>	<a href="#">End of Life Information</a>
<b>Contractual warranty</b>	
<b>Warranty</b>	18 months