

# Product datasheet

Specifications



Harmony XB5, Selector switch, plastic, black, Ø22, 2 positions, spring return right to left, 1 NO

Local distributor code: 409068038    XB5AD41

## Main

|                               |                                                                                                                                                                            |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Range of product              | Harmony XB5                                                                                                                                                                |
| Product or component type     | Selector switch                                                                                                                                                            |
| Device short name             | XB5                                                                                                                                                                        |
| Bezel material                | Dark grey plastic                                                                                                                                                          |
| Head type                     | Standard                                                                                                                                                                   |
| Mounting diameter             | 22 mm                                                                                                                                                                      |
| Sale per indivisible quantity | 1                                                                                                                                                                          |
| Shape of signaling unit head  | Round                                                                                                                                                                      |
| Type of operator              | Right to left spring return                                                                                                                                                |
| Operator profile              | Black standard handle                                                                                                                                                      |
| Operator position information | 2 positions 90°                                                                                                                                                            |
| Contacts type and composition | 1 NO                                                                                                                                                                       |
| Contact operation             | Slow-break                                                                                                                                                                 |
| Connections - terminals       | Screw clamp terminals, <= 2 x 1.5 mm² with cable end conforming to EN/IEC 60947-1<br>Screw clamp terminals, >= 1 x 0.22 mm² without cable end conforming to EN/IEC 60947-1 |

## Complementary

|                                    |                                                                                                   |
|------------------------------------|---------------------------------------------------------------------------------------------------|
| Height                             | 42 mm                                                                                             |
| Width                              | 30 mm                                                                                             |
| Depth                              | 70 mm                                                                                             |
| Terminals description ISO n°1      | (13-14)NO                                                                                         |
| Net weight                         | 0.046 kg                                                                                          |
| Resistance to high pressure washer | 7000000 Pa at 55 °C, distance : 0.1 m                                                             |
| Contacts usage                     | Standard contacts                                                                                 |
| Positive opening                   | Without                                                                                           |
| Torque value                       | 0.14 N.m NO changing electrical state                                                             |
| Mechanical durability              | 1000000 cycles                                                                                    |
| Tightening torque                  | 0.8...1.2 N.m conforming to EN 60947-1                                                            |
| Shape of screw head                | Cross compatible with Philips no 1 screwdriver<br>Cross compatible with pozidriv No 1 screwdriver |

|                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                             | Slotted compatible with flat Ø 4 mm screwdriver<br>Slotted compatible with flat Ø 5.5 mm screwdriver                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Contacts material                           | Silver alloy (Ag/Ni)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Short-circuit protection                    | 10 A cartridge fuse type gG conforming to EN/IEC 60947-5-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| [Ith] conventional free air thermal current | 10 A conforming to EN/IEC 60947-5-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| [Ui] rated insulation voltage               | 600 V (pollution degree 3) conforming to EN 60947-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| [Uimp] rated impulse withstand voltage      | 6 kV conforming to EN 60947-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| [Ie] rated operational current              | 3 A at 240 V, AC-15, A600 conforming to EN/IEC 60947-5-1<br>6 A at 120 V, AC-15, A600 conforming to EN/IEC 60947-5-1<br>0.1 A at 600 V, DC-13, Q600 conforming to EN/IEC 60947-5-1<br>0.27 A at 250 V, DC-13, Q600 conforming to EN/IEC 60947-5-1<br>0.55 A at 125 V, DC-13, Q600 conforming to EN/IEC 60947-5-1<br>1.2 A at 600 V, AC-15, A600 conforming to EN/IEC 60947-5-1                                                                                                                                                                                                                                                                            |
| Electrical durability                       | 1000000 cycles, AC-15, 2 A at 230 V, operating rate <3600 cyc/h, load factor: 0.5 conforming to EN/IEC 60947-5-1 appendix C<br>1000000 cycles, AC-15, 3 A at 120 V, operating rate <3600 cyc/h, load factor: 0.5 conforming to EN/IEC 60947-5-1 appendix C<br>1000000 cycles, AC-15, 4 A at 24 V, operating rate <3600 cyc/h, load factor: 0.5 conforming to EN/IEC 60947-5-1 appendix C<br>1000000 cycles, DC-13, 0.2 A at 110 V, operating rate <3600 cyc/h, load factor: 0.5 conforming to EN/IEC 60947-5-1 appendix C<br>1000000 cycles, DC-13, 0.5 A at 24 V, operating rate <3600 cyc/h, load factor: 0.5 conforming to EN/IEC 60947-5-1 appendix C |
| Electrical reliability                      | $\Lambda < 10\text{exp}(-6)$ at 5 V, 1 mA in clean environment conforming to EN/IEC 60947-5-4<br>$\Lambda < 10\text{exp}(-8)$ at 17 V, 5 mA in clean environment conforming to EN/IEC 60947-5-4                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Device presentation                         | Complete product                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

## Environment

|                                       |                                                                                                                                                                                |
|---------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Protective treatment                  | TH                                                                                                                                                                             |
| Ambient air temperature for storage   | -40...70 °C                                                                                                                                                                    |
| Ambient air temperature for operation | -40...70 °C                                                                                                                                                                    |
| Electrical shock protection class     | Class II conforming to IEC 60536                                                                                                                                               |
| IP degree of protection               | IP67 conforming to IEC 60529<br>IP69<br>IP69K                                                                                                                                  |
| NEMA degree of protection             | NEMA 13<br>NEMA 4X                                                                                                                                                             |
| IK degree of protection               | IK06 conforming to IEC 50102                                                                                                                                                   |
| Standards                             | EN/IEC 60947-5-4<br>EN/IEC 60947-1<br>JIS C8201-5-1<br>UL 508<br>EN/IEC 60947-5-1<br>CSA C22.2 No 14<br>JIS C8201-1                                                            |
| Product certifications                | UL<br>CSA<br>BV<br>GL<br>LROS (Lloyds register of shipping)<br>DNV                                                                                                             |
| Vibration resistance                  | 5 gn (f= 2...500 Hz) conforming to IEC 60068-2-6                                                                                                                               |
| Shock resistance                      | 30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27<br>50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27 |

## Packing Units

|                              |     |
|------------------------------|-----|
| Unit Type of Package 1       | PCE |
| Number of Units in Package 1 | 1   |

|                              |          |
|------------------------------|----------|
| Package 1 Weight             | 46.0 g   |
| Package 1 Height             | 3.2 cm   |
| Package 1 width              | 5.4 cm   |
| Package 1 Length             | 8.2 cm   |
| Unit Type of Package 2       | S02      |
| Number of Units in Package 2 | 50       |
| Package 2 Weight             | 2.589 kg |
| Package 2 Height             | 15 cm    |
| Package 2 width              | 30 cm    |
| Package 2 Length             | 40 cm    |
| Package 3 Height             | 15 cm    |


Offer Sustainability

|                            |                                                                                                                             |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Sustainable offer status   | Green Premium product                                                                                                       |
| REACH Regulation           | <a href="#">REACH Declaration</a>                                                                                           |
| REACH free of SVHC         | Yes                                                                                                                         |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope)<br><a href="#">EU RoHS Declaration</a>                           |
| Toxic heavy metal free     | Yes                                                                                                                         |
| Mercury free               | Yes                                                                                                                         |
| RoHS exemption information | <a href="#">Yes</a>                                                                                                         |
| China RoHS Regulation      | <a href="#">China RoHS declaration</a>                                                                                      |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>                                                                               |
| Circularity Profile        | <a href="#">End of Life Information</a>                                                                                     |
| WEEE                       | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |

Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Dimensions

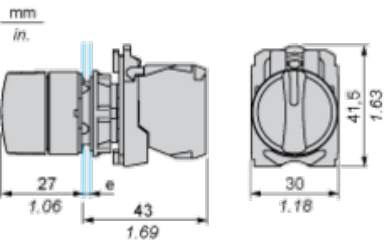

e: clamping thickness: 1 to 6 mm / 0.04 to 0.24 in.


Product datasheet

XB5AD41

Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)


Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board

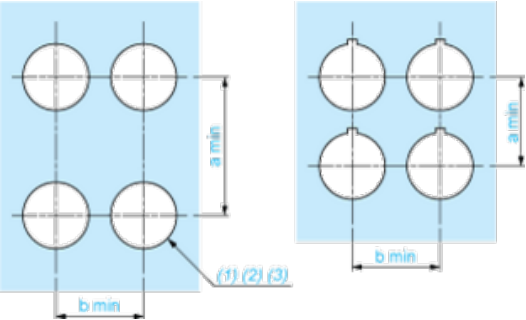

- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3) Ø22.5 mm recommended ( $\text{Ø}22.3 \text{ }_0^{+0.4}$ ) / Ø0.89 in. recommended ( $\text{Ø}0.88 \text{ in. }_0^{+0.016}$ )

| Connections                                   | a in mm | a in in. | b in mm | b in in. |
|-----------------------------------------------|---------|----------|---------|----------|
| By screw clamp terminals or plug-in connector | 40      | 1.57     | 30      | 1.18     |
| By Faston connectors                          | 45      | 1.77     | 32      | 1.26     |
| On printed circuit board                      | 30      | 1.18     | 30      | 1.18     |

Detail of Lug Recess



- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3) Ø22.5 mm recommended ( $\text{Ø}22.3 \text{ }_0^{+0.4}$ ) / Ø0.89 in. recommended ( $\text{Ø}0.88 \text{ in. }_0^{+0.016}$ )